

**Constant Current Dimmable Driver**

**Model:C15C100-700N-C**



| Model          | Output Current (*Typical) | Input Current | Input Power | Output Power Range | PF   | Efficiency | Output Voltage | No load Voltage |
|----------------|---------------------------|---------------|-------------|--------------------|------|------------|----------------|-----------------|
| C15C100-700N-C | 100mA                     | 0.04A         | 6.5W        | 0.25-4.50W         | 0.6  | 83%        | 2.5-45V        | 59V             |
|                | 200mA                     | 0.07A         | 11.5W       | 0.50-9.00W         | 0.8  | 85%        | 2.5-45V        | 59V             |
|                | 300mA                     | 0.10A         | 16.8W       | 0.75-13.50W        | 0.85 | 86%        | 2.5-45V        | 59V             |
|                | 400mA                     | 0.11A         | 18.8W       | 1.00-15.20W        | 0.92 | 85%        | 2.5-38V        | 59V             |
|                | 500mA                     | 0.11A         | 18.6W       | 1.25-15.00W        | 0.92 | 85%        | 2.5-30V        | 59V             |
|                | 600mA                     | 0.11A         | 18.5W       | 1.50-15.00W        | 0.92 | 85%        | 2.5-25V        | 59V             |
|                | 700mA                     | 0.11A         | 19.0W       | 1.75-15.4W         | 0.92 | 85%        | 2.5-22V        | 59V             |

\* Test result @230V, 50Hz, Full Load. Current setting @ 1mA-steps (NFC)

**1. Parameters**

| Category | Item                      | Technical Norm                 |
|----------|---------------------------|--------------------------------|
| Features | Output Type               | Constant Current               |
|          | Current Setting           | Near field communication (NFC) |
|          | Output Features           | Isolation                      |
|          | IP Grade                  | IP20                           |
|          | Insulation Class          | Class II                       |
| Input    | Rated Input Voltage       | 220-240VAC                     |
|          | Range of Input Voltage    | 198-264VAC or 180-280VDC       |
|          | Frequency                 | 50/60Hz                        |
|          | Input Current             | ≤0.11A (230VAC, full load)     |
|          | Input Power               | ≤19W (230VAC, full load)       |
|          | Power Factor              | ≥0.92 (230VAC, full load)      |
|          | THD                       | ≤15% (230VAC, full load)       |
|          | Standby power(dim to off) | ≤0.5W @230VAC                  |
| Output   | Output Voltage Range      | 2.5-45VDC@100-300mA            |
|          |                           | 2.5-38VDC@400mA                |
|          |                           | 2.5-30VDC@500mA                |



|                |                          |   |
|----------------|--------------------------|---|
|                |                          | 2.5-25VDC@600mA   |
|                |                          | 2.5-22VDC@700mA   |
|                | No Load Voltage          | 59VDC Max.  |
|                | Output Current           | 100mA -700mA  |
|                | Max. Output Power        | 15W   |
|                | Efficiency               | ≥85% (230VAC, full load)  |
|                | Current Ripple(< 120 Hz) | ±5% (Imax-Imin)/(Imax+Imin)   |
|                | PstLM                    | ≤1  |
|                | SVM                      | ≤0.4  |
|                | Current Accuracy         | ±5% (@300-700mA)<br>±8% (@100-200mA)  |
|                | Started Delay Time       | ≤1S(230VAC, full load)  |
| Control Method | Dimming range            | CASAMBI dimming: 1%-100% ,Dim to off .  |
|                | NFC current setting      | The output current can be set within the total value range in 1-mA-steps.Output current is mean value. Setting is by KGP's software APP/APK/PC with FEIG equipment or mobile phone. |
| Protection     | Short Circuit Protection | Auto Recovery   |
|                | Overload Protection      | Auto Recovery   |
|                | No-load Protection       | Auto Recovery   |
|                | Insulation voltage       | 3000V 5mA 60S between P-S   |
|                | Insulation resistance    | >100M ohm @ 500VDC  |
|                | Leakage current          | < 250μA, I/P to O/P or I/P to PE @230V input  |
| Environment    | Ta/Operation Temperature | -20....+50℃   |
|                | Ts/Storage Temperature   | -35....+85℃   |
|                | Tc/Enclosure Temperature | 85℃   |
|                | Humidity                 | 10%....90%RH  |
|                | Atmosphere               | 86-108KPa   |
| Construction   | Connection Method        | Direct Lead   |
|                | Installation             | Built-in  |
|                | Dimension                | 64.5*40*23mm (L*W*H)  |
| Standards      | Certification            | CE  |
|                | Safety Standards         | EN 61347-1:2015/A1:2021<br>EN 61347-2-13:2014/A1:2017<br>EN IEC 62384:2020 EN 62493:2015<br>AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1   |
|                | EMC Standards EMC        | EN IEC 55015:2019<br>EN IEC 55015:2019/A11:2020<br>EN IEC 61000-3-2:2019/A1:2021<br>EN 61000-3-3:2013/A2:2021 EN 61547:2009   |
|                | Performance              | EN62384:2020  |
|                | Surge                    | L-N/1KV   |
|                | Others                   | RoHS  |



|  |           |   |
|--|-----------|---|
|  | Life Time | 50000h @Ta  |
|  | Warranty  | 5years ,F.R. < 10000ppm                           |
|  | Noise     | ≤ 24dB @Background noise ≤18dB ,<br>Interval≥15cm |


Remark:

1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
- 2.LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.


## 2. Connected quantities of different current Breaker

| TYPE   | Connected quantities of different current Breaker |                    |                    |                    |                  |                  | Input Voltage | Inrush Current (A) | Time |
|--------|---|--------------------|--------------------|--------------------|------------------|------------------|---------------|--------------------|------|
|        | current (A)                                       | 10                 | 13                 | 16                 | 20               | 25               |               |                    |      |
|        | Installation wire diameter                        | 1.5mm <sup>2</sup> | 2.5mm <sup>2</sup> | 2.5mm <sup>2</sup> | 4mm <sup>2</sup> | 4mm <sup>2</sup> |               |                    |      |
| TYPE B | 9   | 12                 | 15                 | 18                 | 23               | @230VAC          | 65            | 200US              |      |
| TYPE C | 15  | 19                 | 24                 | 30                 | 37               |                  |               |                    |      |
| TYPE D | 24  | 31                 | 38                 | 47                 | 59               |                  |               |                    |      |


## 3. Label

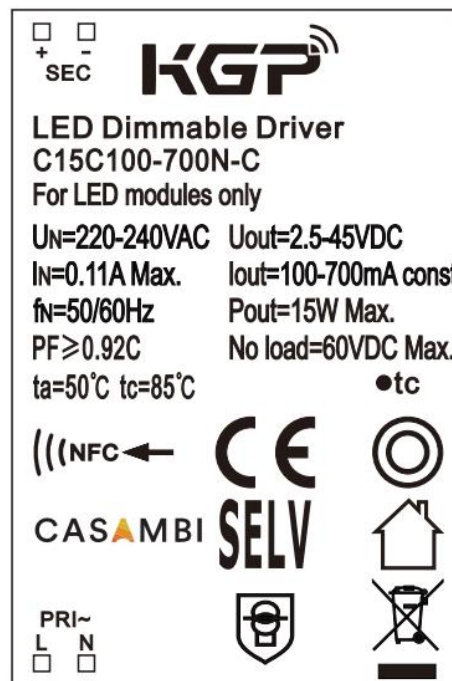

4. Electrical values

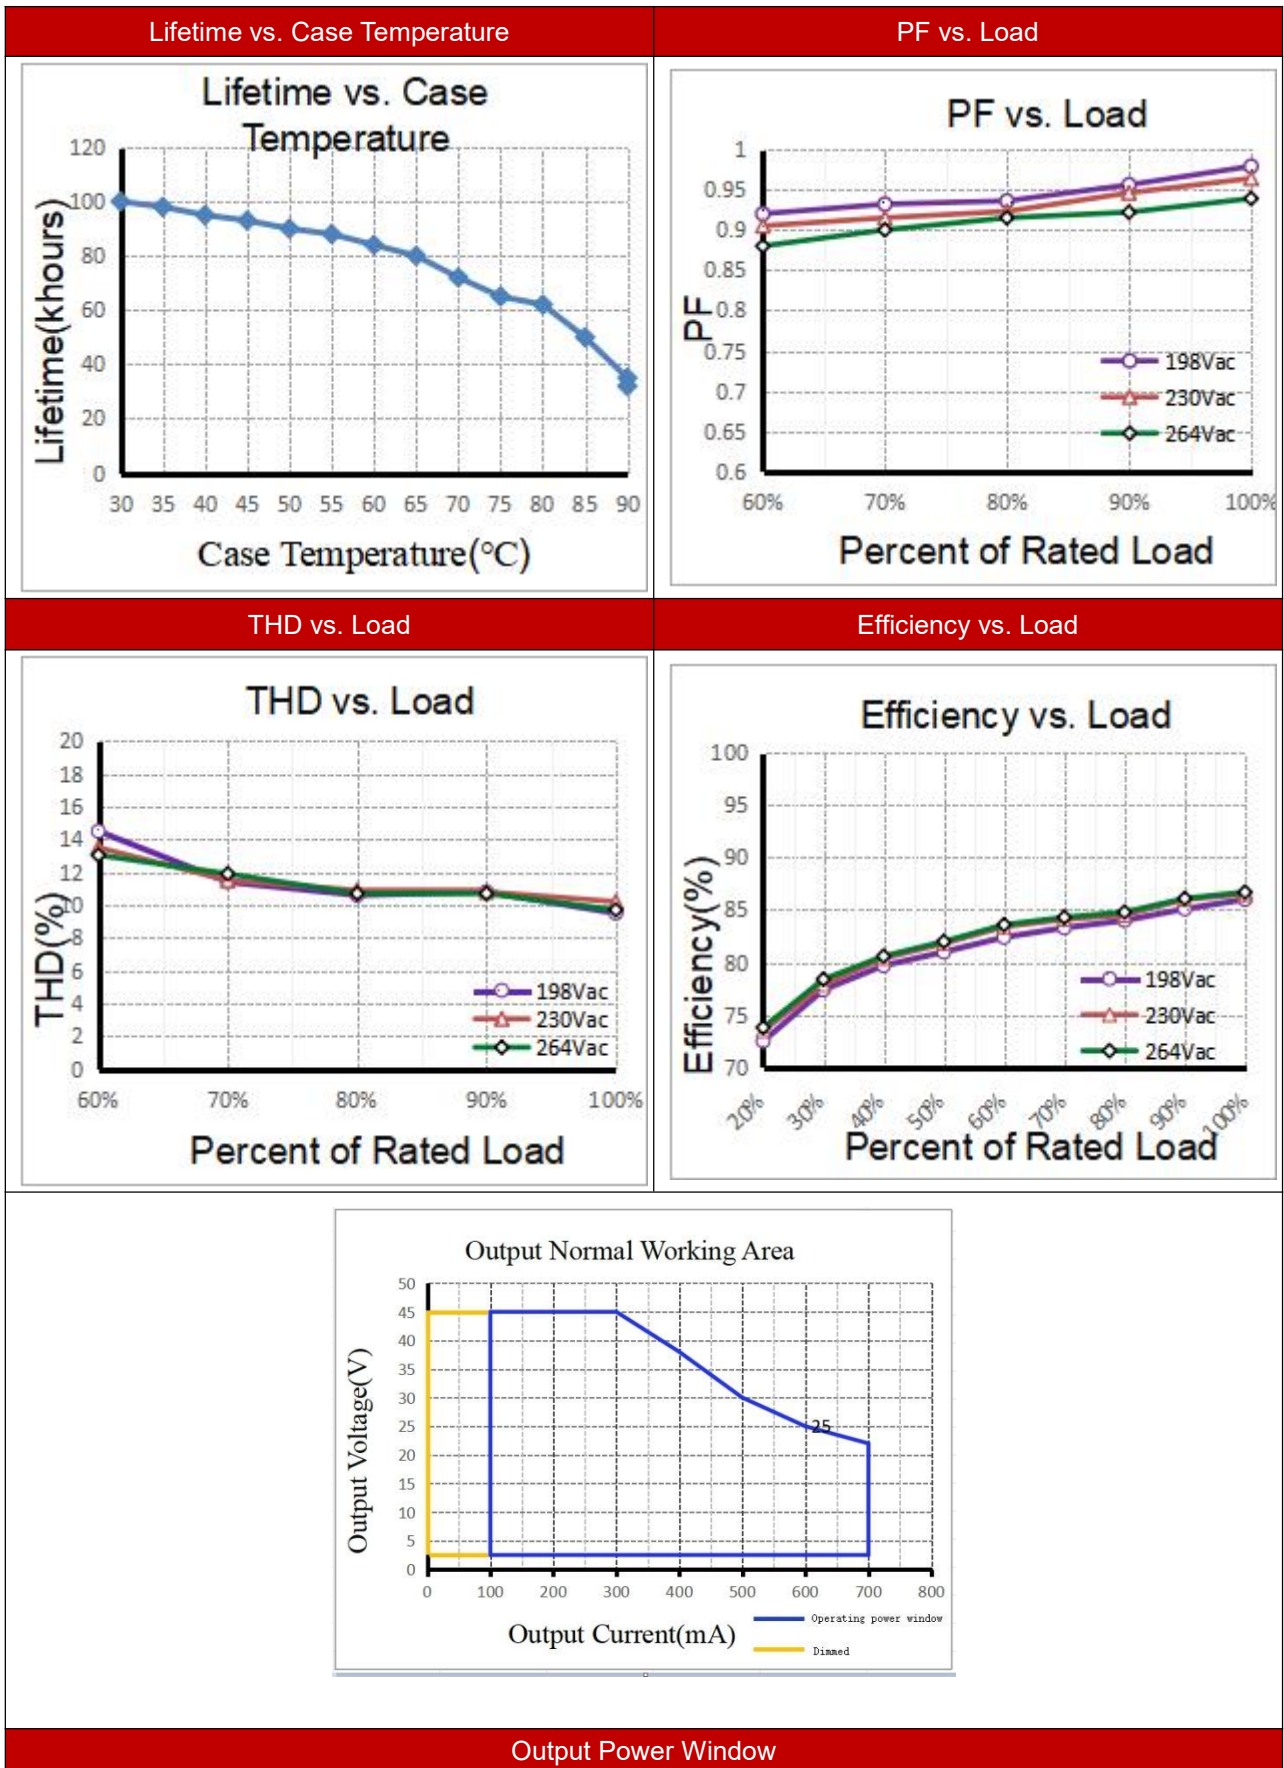


## 5. Dimension

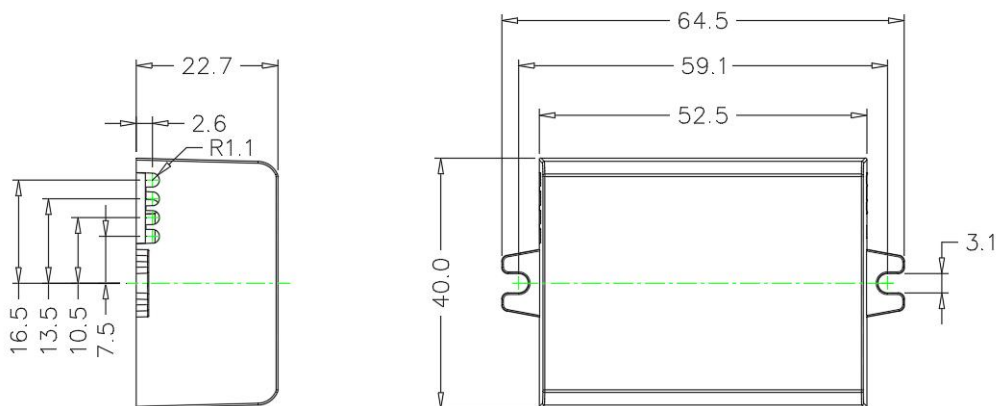

## 6. Packing information

| Packing way | Model          | Colour | Carton L*W*H(mm) | Pcs/ Carton | Net weight/ Pcs(kg) | Net weight/ Carton(kg) | Gross weight/ Carton(kg) |
|-------------|----------------|--------|------------------|-------------|---------------------|------------------------|--------------------------|
| industrial  | C15C100-700N-C | White  | L420*W280*H210   | 160         | 0.065               | 10.4                   | 11.9                     |

## 7. Wiring Diagram

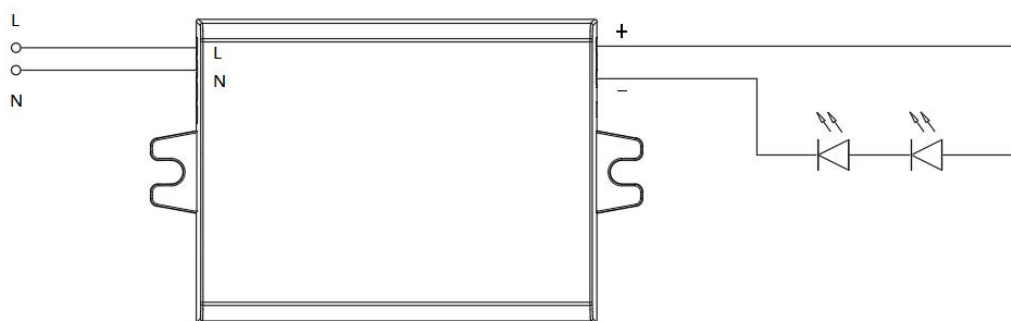

## 8. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- Hot plug-in is not supported due to residual output voltage of > 0 V up to mains voltage. Danger to life.
- When connecting an LED load, restart the device to activate the LED output.



## 9. Replace LED module

- Mains off
- Remove LED module
- Wait for 30 seconds
- Connect LED module again

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs

## 10. NFC instructions


You are advised to set driver parameters when the power supply is not enabled







Make sure your computer has NFC capability and has it activated.

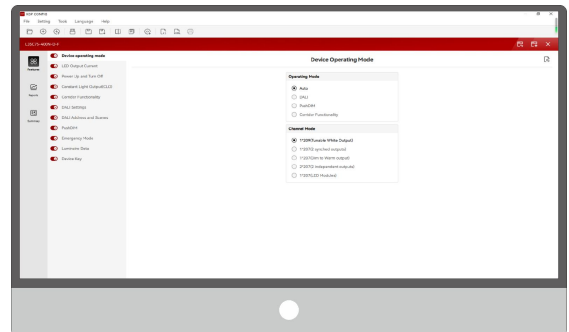NFC Reader (optional)

Feature:

Easily on-line read a output current from a driver or write a new current data to a driver throughout KGP NFC reader within few seconds.




| Product  | Description   | Interface        | Matching antenna   | Zhaga approval | Usage                              |
|--|---|------------------|--|----------------|------------------------------------|
| <br>ID CPR30+         | Desktop programmer  | USB              | Integrated   | Yes            | Single Programming on Desktop      |
| <br>ID ISC.PRH101-USB | Handheld programmer                                       | USB              | Integrated   | Yes            | Single Programming by Handheld     |
| <br>ID ISC.MR102-USB  | Middle range programmer , for connecting external antenna | USB              | RF-MANT12786<br>      | Yes            | Single Programming on Product line |
| <br>ID ISC.LR1002-E   | Long range programmer , for connecting external antenna   | USB,RS232,TCP/IP | ID ISC.ANT310/310<br> | Yes            | Multi Programming System           |




**Step 1: Import database file (The ecg database needs to be used only for the first installation)**

Click the “Tool” field and select “Import ECG Library” to import the ECG database.

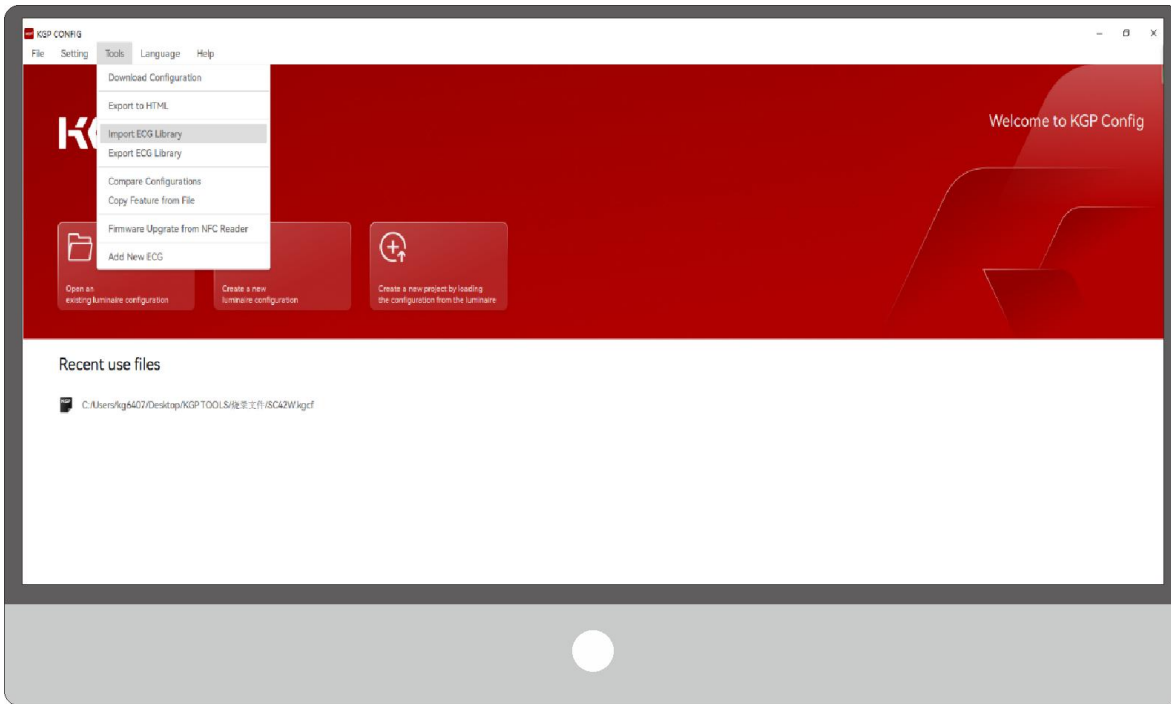


**Step 2: Connect FEIG reader**

Click the “Setting” button to check whether the NFC port is connected

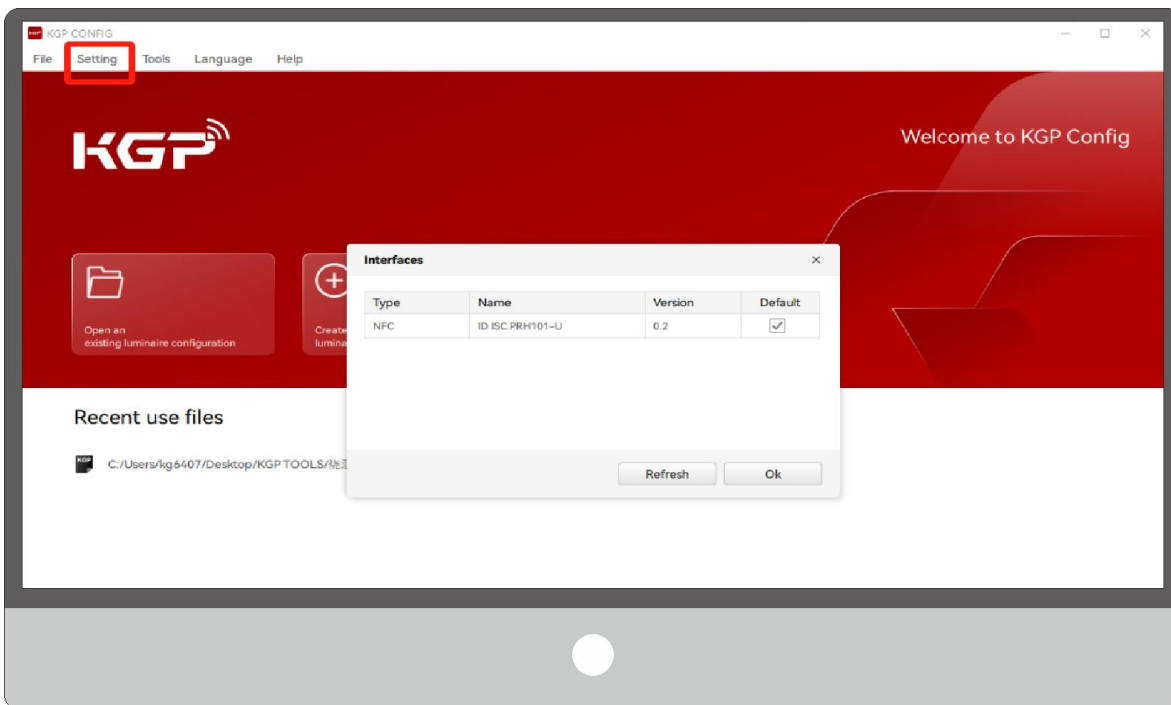


### Step 3: Read product information

Click this button to read

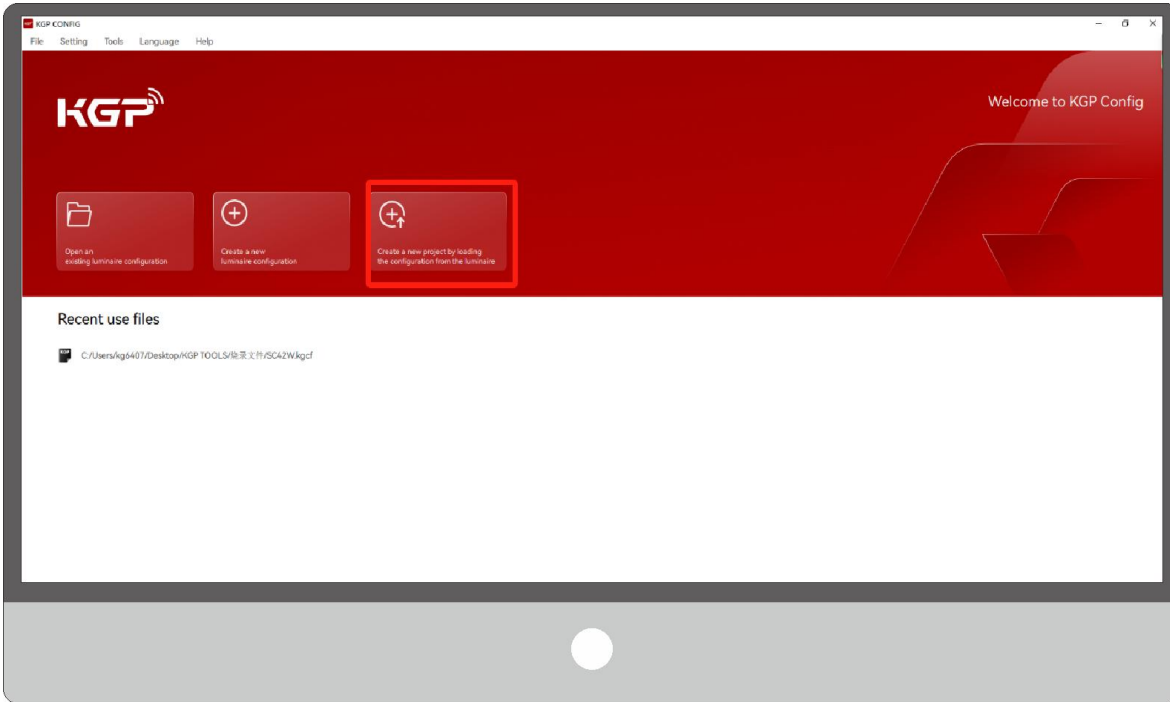


### Step 4: You can choose to set the output current according to your needs

Enter the Output current value you want to change in the inputbox

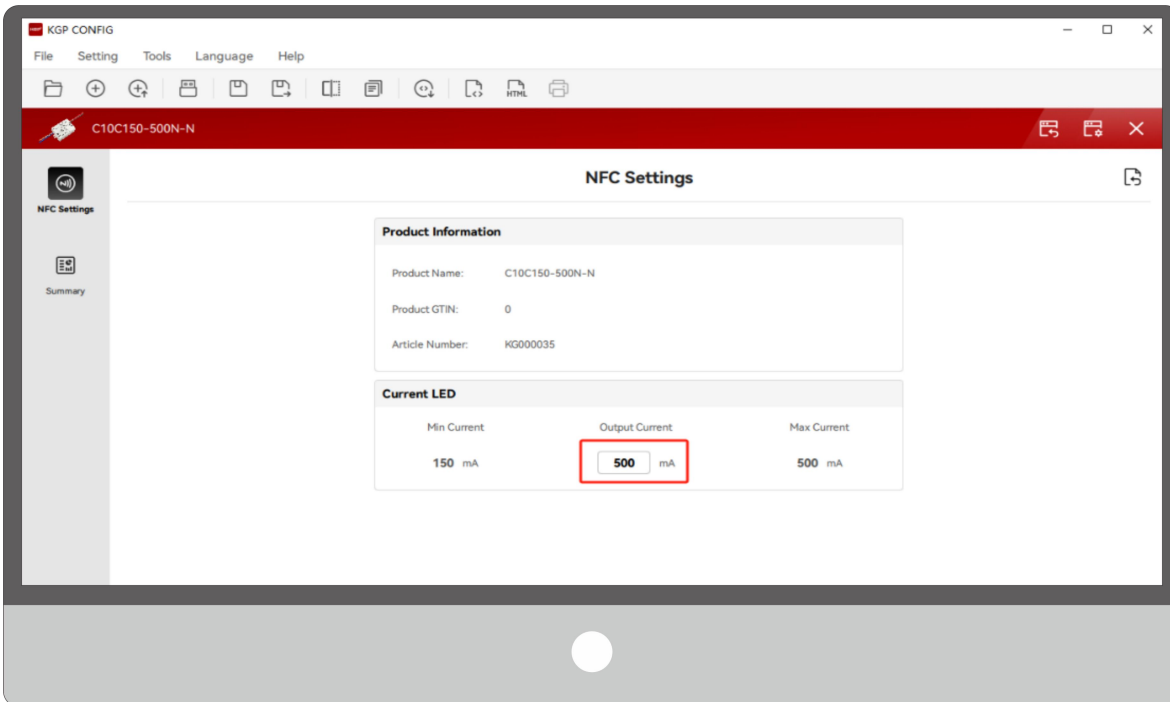


**Step 5: After the modification is complete, the download configuration page is displayed**

1) Click this button to enter the "Download Configuration" window, select the "User" option box, and click the "Start Programming" button for the next step.

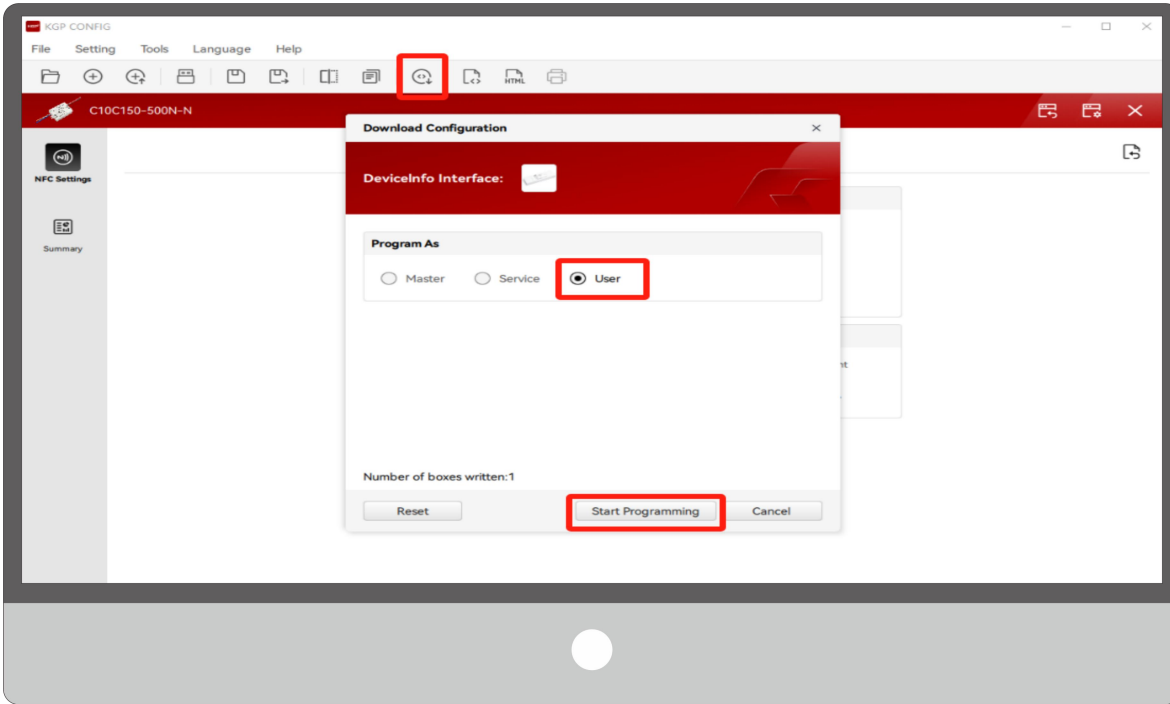

2) Click the "Start" button to program.

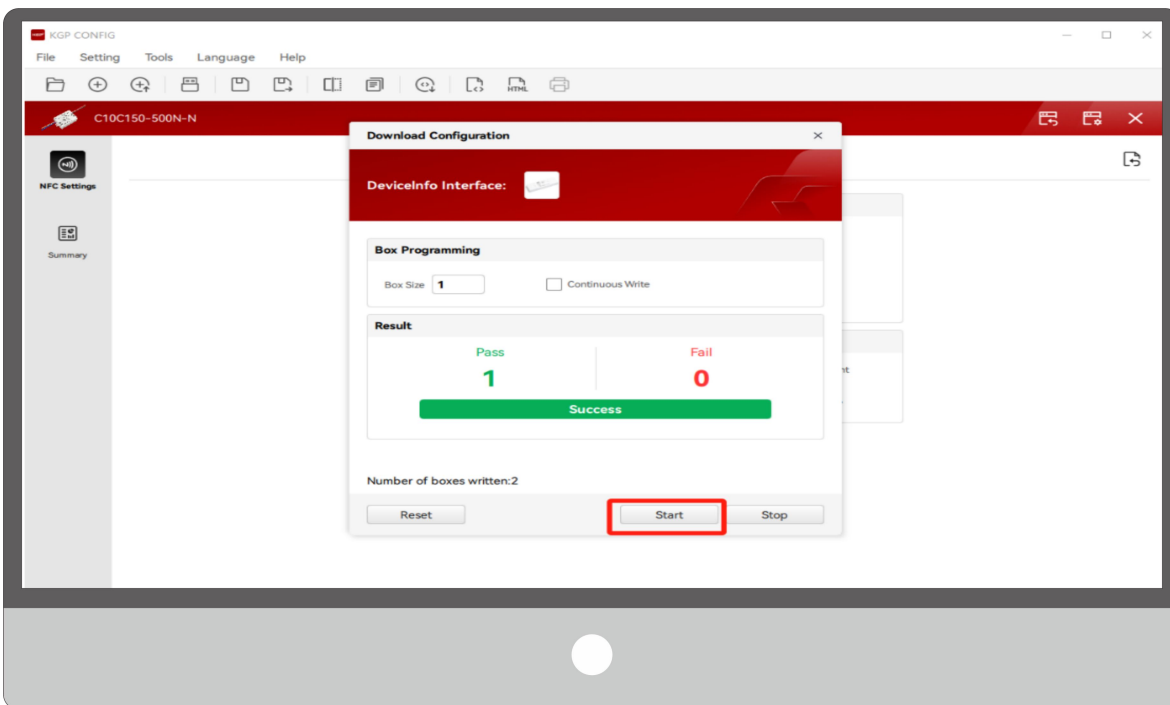


## 11. mobile client:

### Note:


1. Please Make sure that you have enabled NFC function with your mobile phone/ tablet.
2. Please Make sure that the "NFC position" is matched.
3. Please do not power on the device before setting.

### Step 1: Download the APP ,Then open the APP

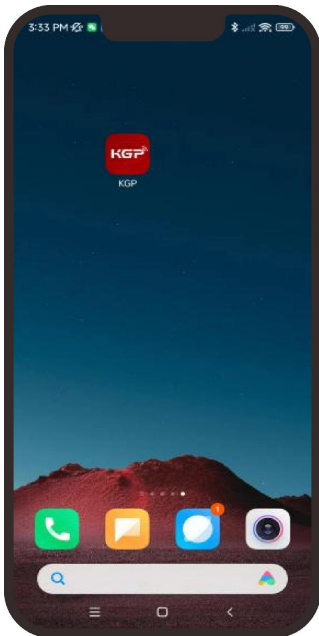


### Step 2: Import database file


Click the drop-down box above, select "Import ECG library", then import the db database file.

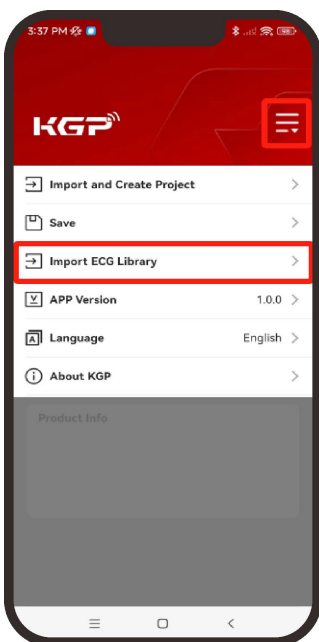

**Step 3: Read product information**

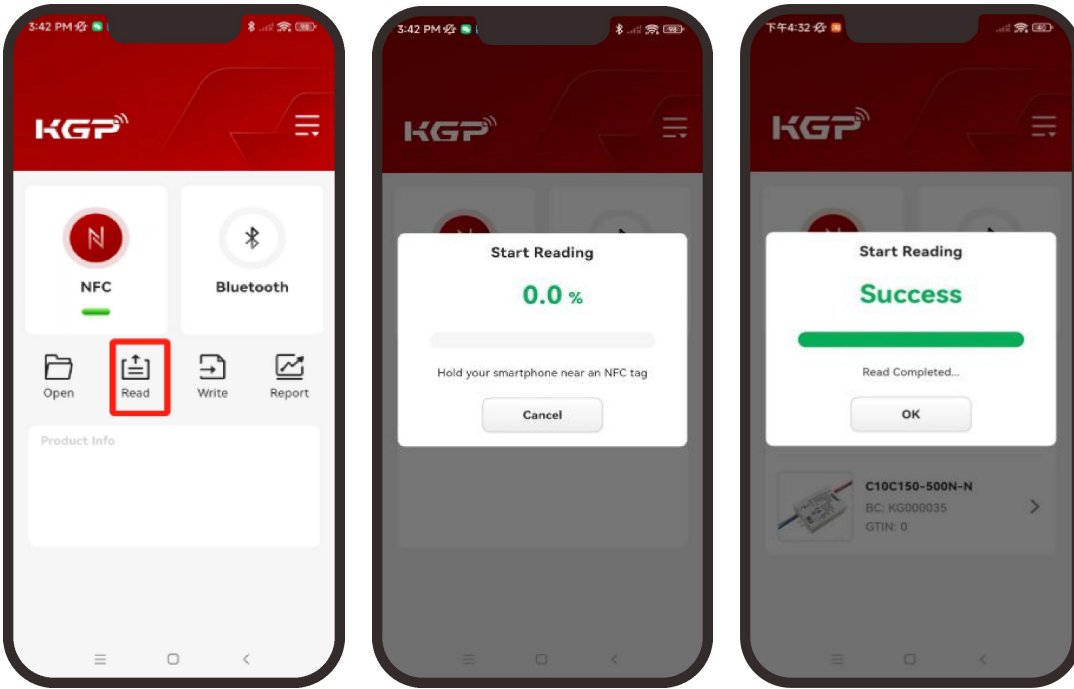

**Step 4: You can choose to set the output current according to your needs, then write the configuration, and power on the device**

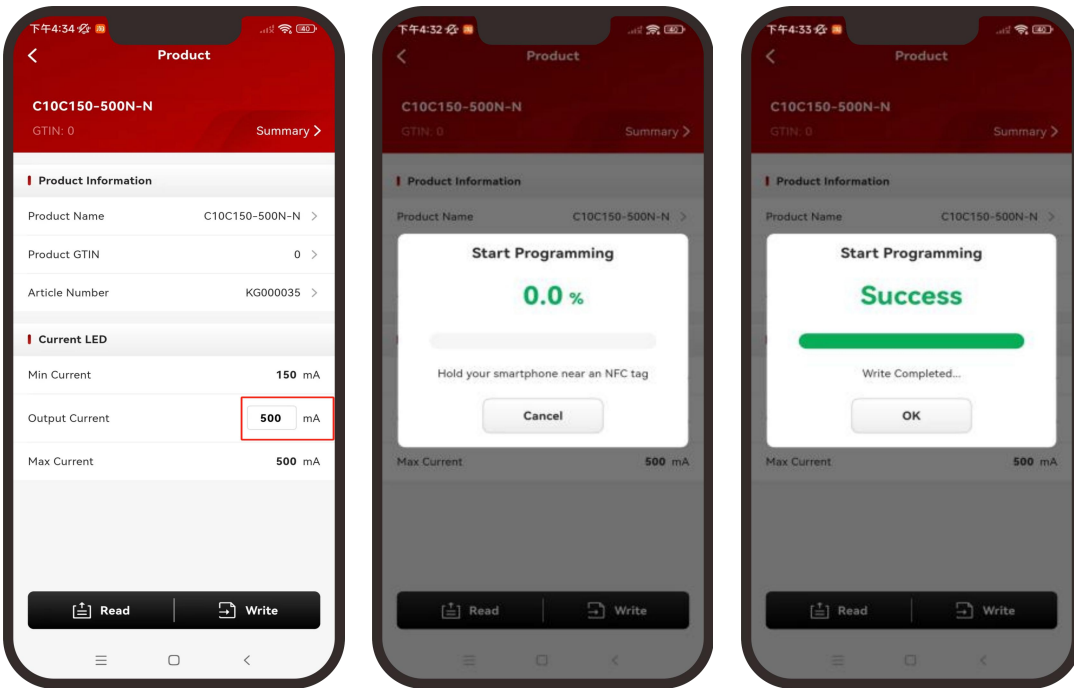

**Tips:**


1. NFC function doesn't require any power driver.
2. Many functions can be configured by NFC. Kindly check your desired functions.




## 12. CASAMBI Help guide

IOS terminal:


**Step 1:Download the APP (search for "CASAMBI" in the App Store) and open the APP**

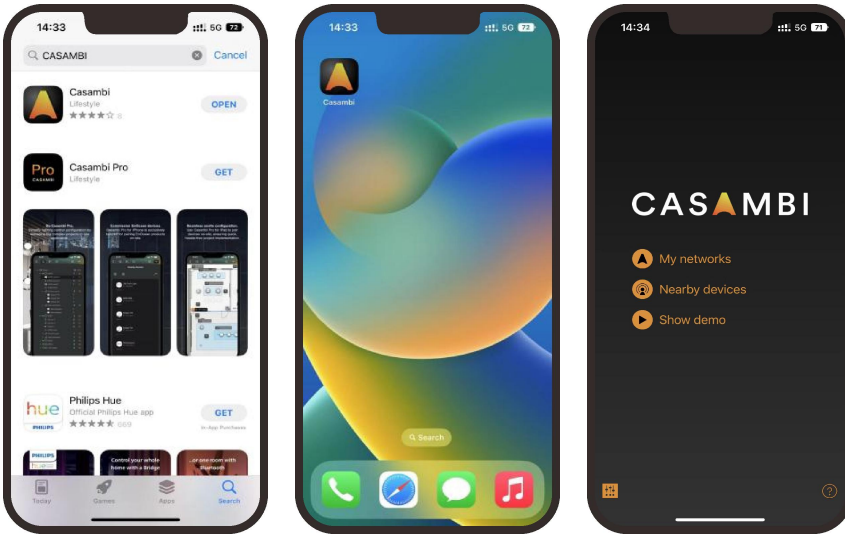


**Step 2:Turn on Bluetooth, select a nearby device, it will be displayed after powering on, and then add it to the new network**

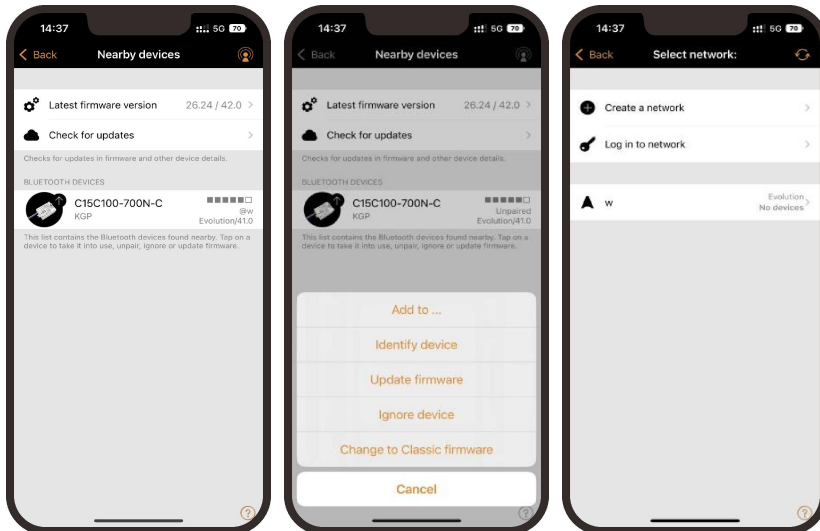


**Step 3: Create a regular network. The name, sharing mode, email address, and password are required**

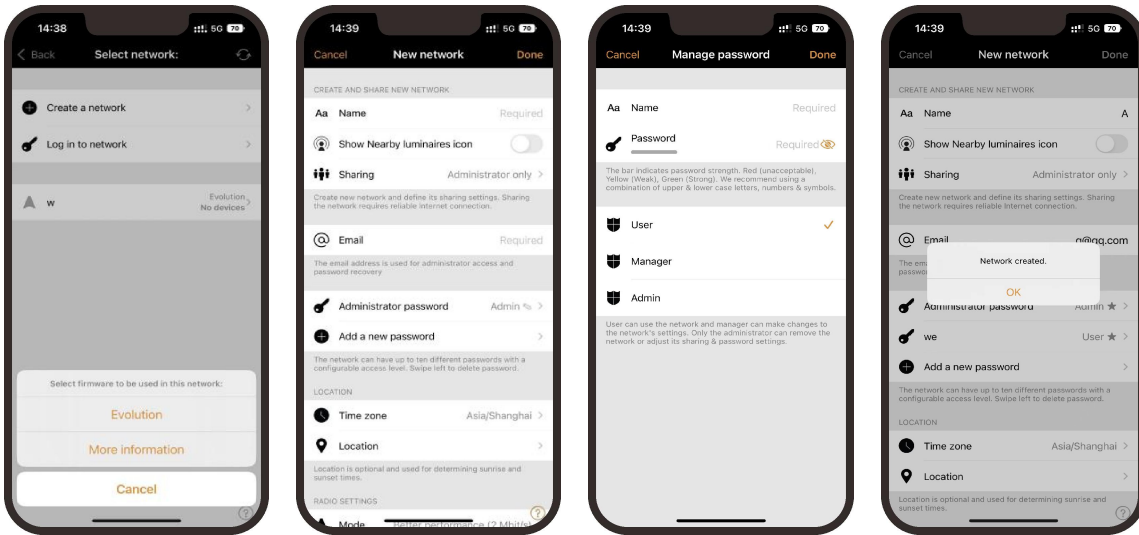


**Step 4: Then return to the nearby device page and select the newly created network when you add it**

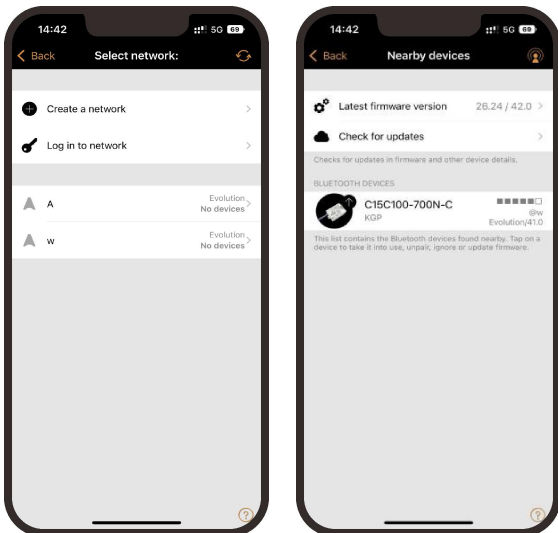

**Step 5: Return to the main page, open the "Change network" option in the "More" in the lower right corner, select the newly created network, click the icon to send the switch command to the lamp, and long press to dimmer it**

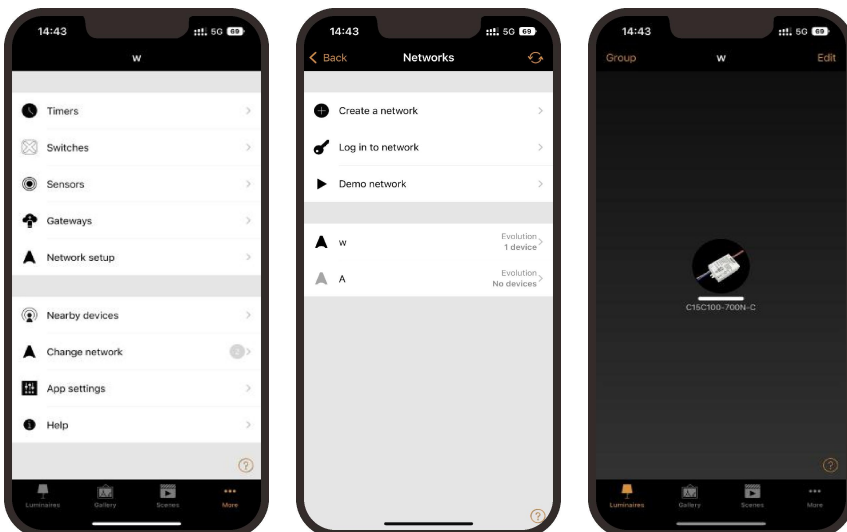

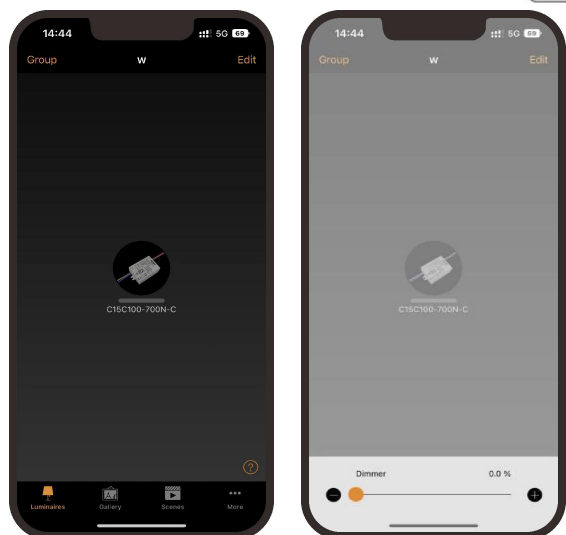

### 13. REVISION HISTORY

| DATE      | REV  | Modification details |
|-----------|------|----------------------|
| 2024-4-12 | V1.0 | Initial release.     |
|           |      |                      |
|           |      |                      |
|           |      |                      |
|           |      |                      |

