


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/18/07		LJC 08/18/07
D	DRAWING UPDATE	JLZ 05/22/19'		

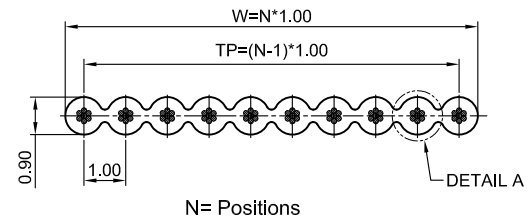


- NOTES:**
- Insulation material: PVC
Color: Grey
 - SPECIFICATION**
 - Rating: 300V
 - Conductor Size: 30AWG
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature:-20°C~70°C.
 - APPLICATION**
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
DS1057-01 - X X X X - X

- X X X X - X: Packing Specifications
 - 30.5: 30.5m/reel
 - 76.5: 76.5m/reel
- X: Edge mark
 - R: Red mark
 - F: Flower mark
- X: Wire diameter
 - 1: Ø0.100 (30AWG)
 - 2: Ø0.127 (28AWG)
- X: Wire AWG
 - 28: 28AWG
 - 30: 30AWG
- X: Cable color
 - A: Gray
- X: No. Of positions
 - 10: 10pin
 - 64: 64pin

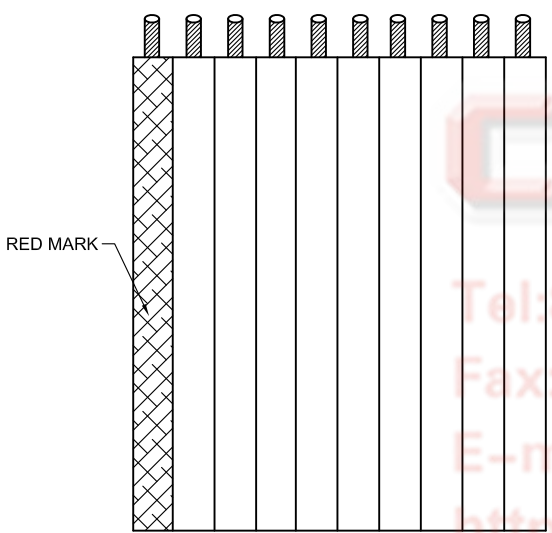

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	9.00	10.00	±0.30	Ø0.100<0.397 Ø0.127<0.237
14	13.00	14.00	±0.30	
16	15.00	16.00	±0.30	
20	19.00	20.00	±0.30	
24	23.00	24.00	±0.30	
26	25.00	26.00	±0.30	
30	29.00	30.00	±0.30	
34	33.00	34.00	±0.40	
40	39.00	40.00	±0.40	
50	49.00	50.00	±0.40	
60	59.00	60.00	±0.40	
64	63.00	64.00	±0.40	

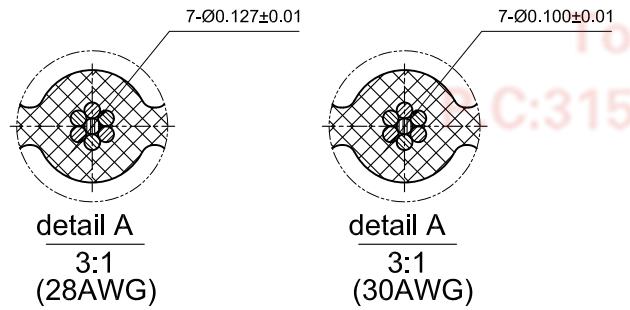

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	UL 2651 PITCH 1.00mm FLAT CABLE		
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	SERIES	DS1057-01 SERIES
.X	±0.38	.X	±3°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD					
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		SCALE					
SCALE		1:1		SHEET		1 OF 1			
DRAWING NO.		C-DS1057-01-XXXXX-X-D							

1 2 3 4 5 6 7 8