




Spring plugs for pluggable terminal blocks / 0134 series

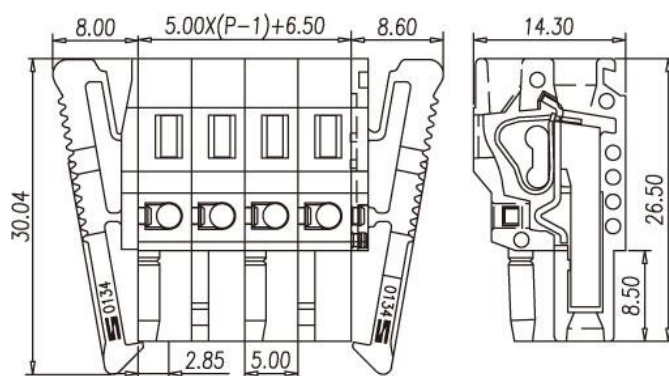

0134-14

**Pitch: 5.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	15A	12A
Conductor cross-section, solid (AWG/ mm ²)	26~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm ²)	26~14 / 0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)		
Screw		
Wire strip length	10mm	
Pole	Cat. No.	
02	0134-1402	
03	0134-1403	
:	:	
:	:	