

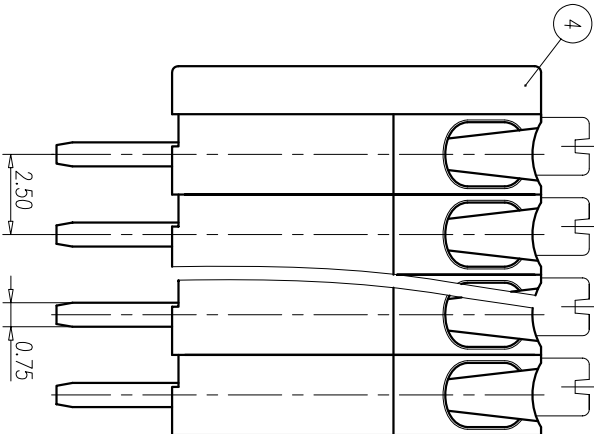
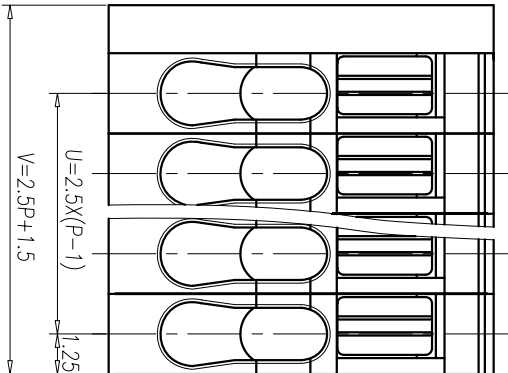


Normal Geometric Tolerancing			
— //		≡	⊥
0 to 100 over 100 to 150 over 150	0.2 0.3 0.5	0 to 10 0.3 over 10	0.2 0.3
Total Pitch Tolerances		Normal dipersion Tolerances	
0<U≤30	±0.20	0~30	±0.25
30<U≤53	±0.25	over 30~53	±0.30
53<U≤70	±0.30	over 53~70	±0.35
70<U≤90	±0.35	over 70~90	±0.44
90<U≤115	±0.44	over 90~115	±0.55
115<U≤150	±0.55	over 115~150	±0.70

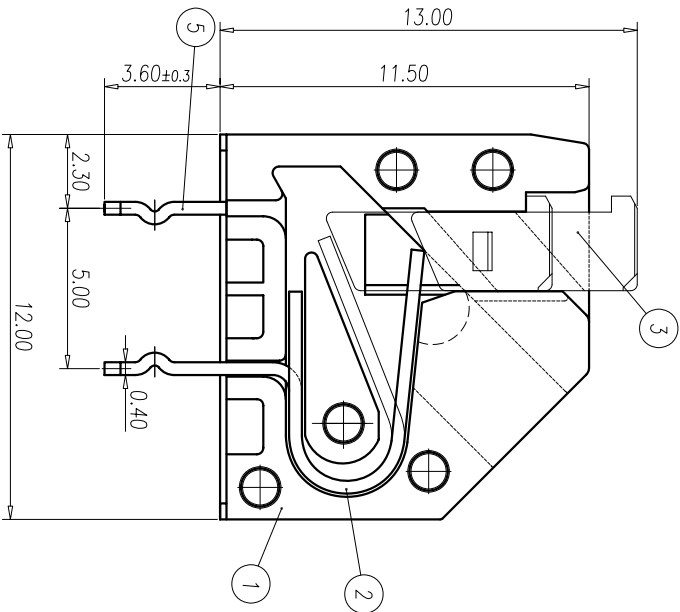

NOTES:

1. Rating: 300V 2 A (IEC 450V)
PITCH: 2.50mm
2. Insulation Withstands Voltage:
AC 2500V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire: 22~20 AWG

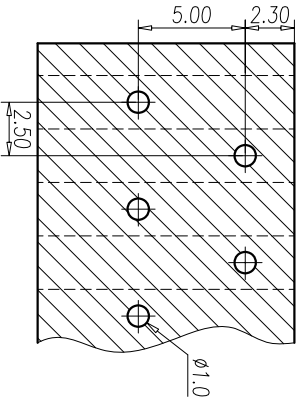

P.C.B. LAYOUT

REV.	CONTENT	CHK.	DATE	DWG.	WYR	DATE	CHK.	DATE	APP.	NAME	DWG NO.
1						09.09.07				0136-10XX	SP-03-013610XX

ITEM	NAME OF PART	MATERIAL	NOTES
5	CLAMP	COPPER-ALLOY	Tin Plated
4	COVER	PA66	UL94-V0 GREY
3	LEVER	PA66	UL94-V0 GREY
2	CLAMP	COPPER-ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREY

DWG.	WYR	DATE	CHK.	DATE	APP.	NAME
		09.09.07				0136-10XX

DINKLE	ENTERPRISE CO.,LTD
--------	--------------------