




Constant Voltage Dimmable Driver

Model: LV160W24CG DALI DT6/8 2CH

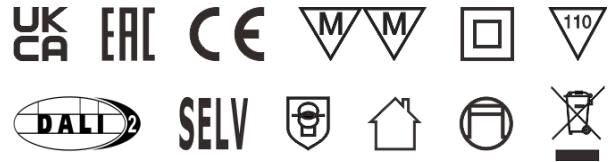

| Model | Output Current | Input Current | Input Power | Output Power Range | PF | Efficiency (*Typical) | Output Voltage | No load Voltage |
|---------------------------|----------------|---------------|-------------|--------------------|-------|-----------------------|----------------|-----------------|
| LV160W24CG DALI DT6/8 2CH | 2.0-6.67A | ≤0.9A | ≤185W | 48-160W | ≥0.95 | ≥91% | 24V | 25V |

*Test results @230V, 50Hz, full load.

* The output power of the LED driver can be shared arbitrarily between the 2 channels; the DIP switch at the output enables switching between DT6 and DT8 modes.


1. Parameters

| Category | Item | Technical Norm |
|----------|---------------------------|-------------------------------|
| Features | Output Type | Constant Voltage |
| | Dimmable Type | DALI-2 |
| | Output Features | Isolation |
| | IP Grade IP | IP20 |
| | Insulation Class | Class II |
| Input | Rated Input Voltage | 220-240VAC |
| | Range of Input Voltage | 198-264VAC |
| | Frequency | 0/50/60Hz |
| | Input Current | ≤0.9A (230VAC, full load) |
| | Input Power | ≤185W (230VAC, full load) |
| | Power Factor | ≥0.95(230VAC, full load) |
| | THD | ≤7% (230VAC, full load) |
| | No-load Power Consumption | ≤0.5W @230VAC |
| | Inrush Current | ≤60A/16us (230VAC, full load) |
| Output | Output Voltage Range | 24VDC+5% |
| | No Load Voltage | 24VDC+5% |
| | Output Current | 2000mA -6670mA (Max. output) |
| | Max. Output Power | 160W |
| | Efficiency | ≥91% (230VAC, full load) |
| | Current Ripple | ±5% (Imax-Imin)/(Imax+Imin) |
| | Output Voltage Ripple | <720mV _{PK-PK} (3%) |
| | PstLM | ≤1 |




| | | |
|----------------|----------------------------|---|
| | SVM | ≤0.4 |
| | Overshoot | <105%Vo |
| | Current Accuracy | ±5% |
| | Line Regulation | ±5% |
| | Load Regulation | ±5% |
| | Started Delay Time | ≤1S(230VAC, full load) |
| Control Method | Secondary PUSH dimming | Secondary PUSH dimming (Max. lead wire length : 20m,same port of DALI) |
| | PUSH dimming terminal | Max parallel connections qty for Push-dim 15 PCS |
| | Dimming range | DALI dimming (Max. lead wire length: 300m) Logarithmic or linear dimming curves are available DALI-2 certified incl. CLO |
| | Dimming frequency | 2KHz |
| | Color temperature range | 2000K-7000K |
| Protection | Short Circuit Protection | Auto Recovery |
| | Overload Protection | Auto Recovery |
| | Over Voltage Protection | 110%-150%Vo, Auto Recovery |
| | No-load Protection | Auto Recovery |
| | Insulation voltage | 3750V 5mA 60S between P-S |
| | Insulation resistance | >100M ohm @ 500VDC |
| | Leakage current | I/P to O/P <0.7mA |
| Environment | Ta/Operation Temperature | -20....+45°C |
| | Ts/Storage Temperature | -25....+85°C |
| | Tc/Enclosure Temperature | 87°C (@ 6670MA) |
| | Humidity | 10%....90%RH |
| | Atmosphere | 86-108KPa |
| Construction | Connection Method | Push-in Terminal |
| | Installation | Independent |
| | PRI Wire preparation | 0.75-1.5 [□] / 8-9mm |
| | SEC Wire preparation | 0.5-1.5 [□] / 8-9mm |
| | DALI Wire preparation DALI | 0.75-1.5 [□] /8-9mm |
| | Dimension | 400*40*22mm (L*W*H) |
| Standards | Certification | UK,CE, EAC |
| | Safety Standards | EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN IEC 62384:2020 EN 62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1 BS EN 61347-1:2015/A1:2021 BS EN 61347-2-13:2014/A1:2017 BS EN 62493:2015 BS EN IEC 62384:2020 |
| | EMC Standards | EN IEC 55015:2019 EN IEC 55015:2019/A11:2020 EN IEC 61000-3-2:2019/A1:2021 |

4. DALI dimming curve

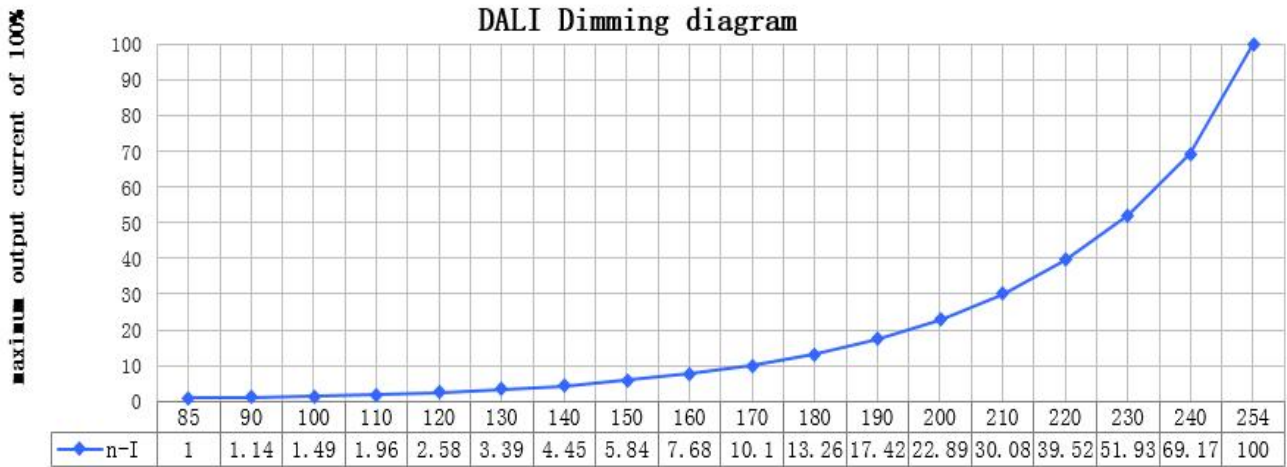


target dimming stage of the total 254 stages


5. Electrical values

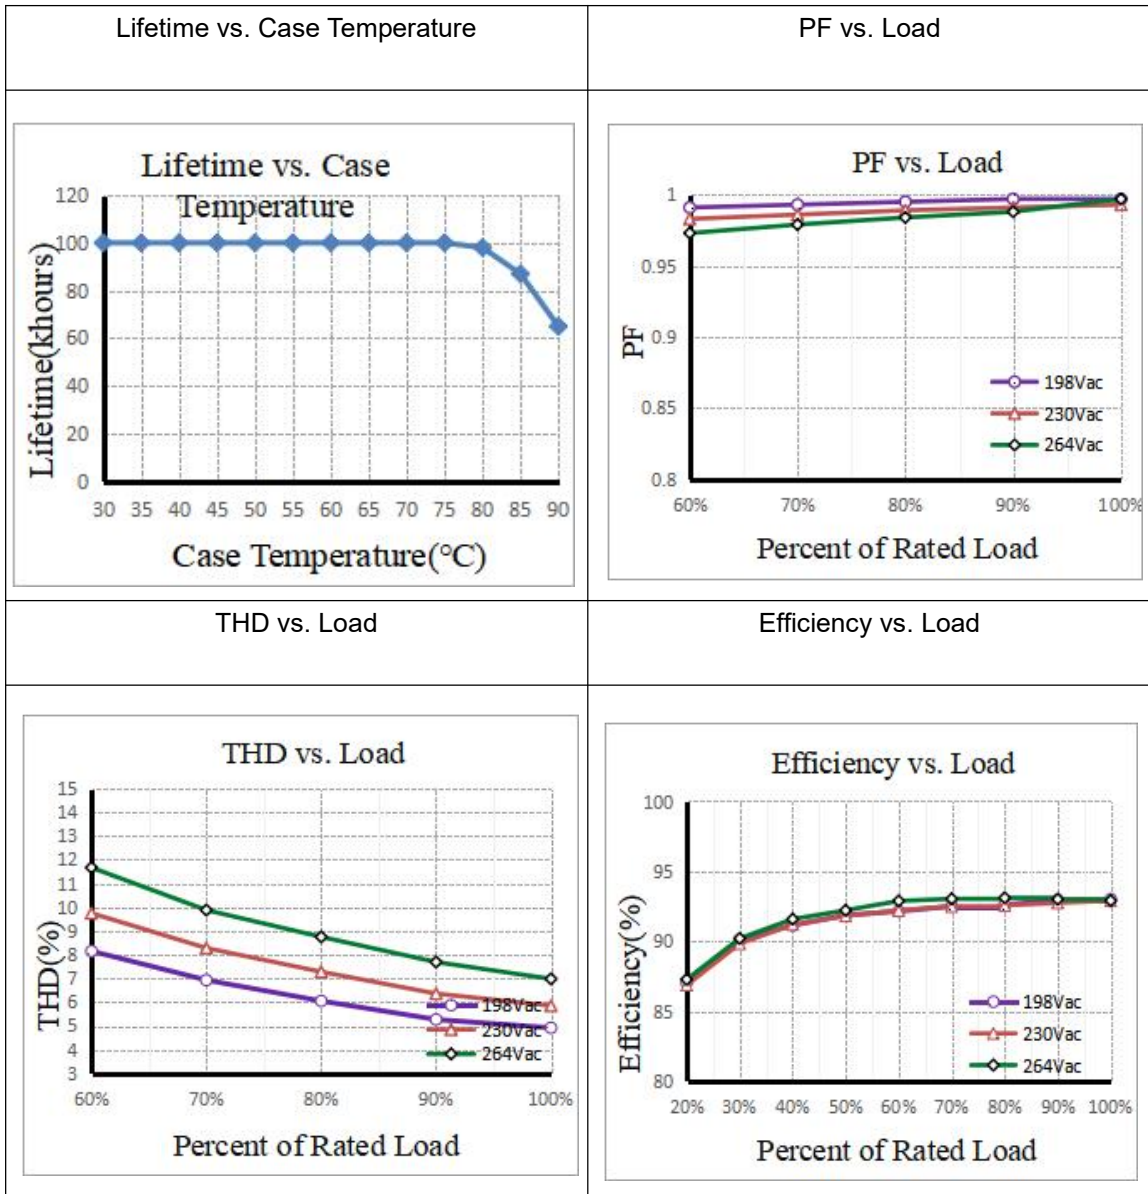

6. Dimension (Unit: mm)

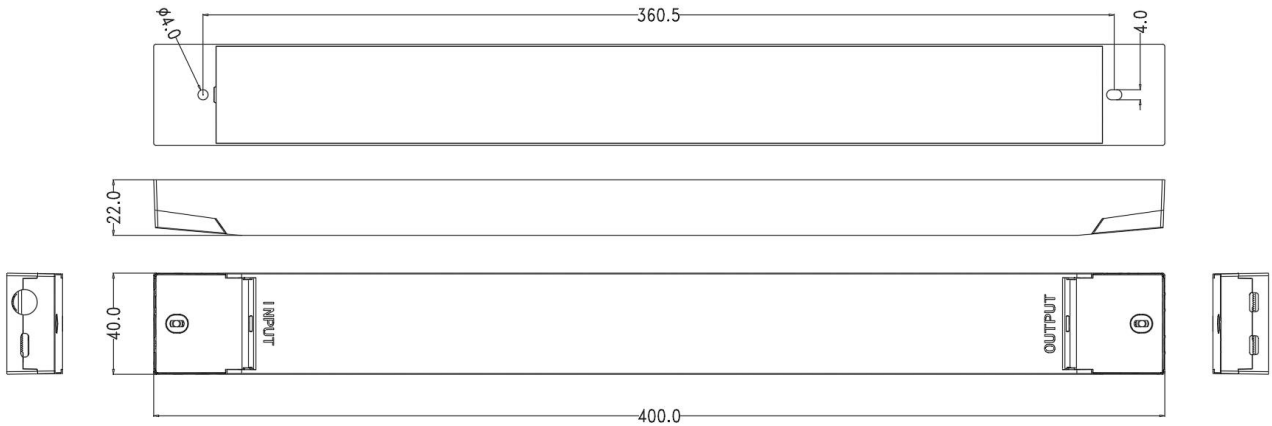

7. Wiring Diagram (DT6/DT8)

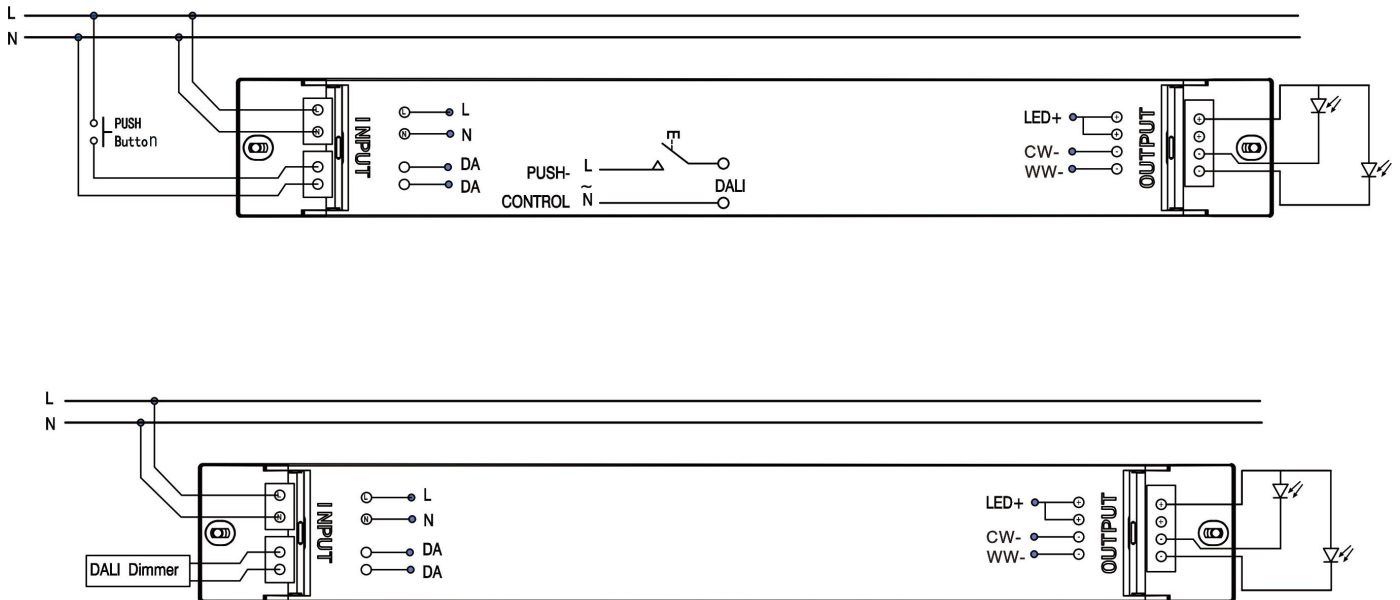

1. The factory default brightness is at 100%.
2. Up to 15 drivers can perform the PUSH dimming at the same time when utilizing one common push button
3. The maximum length of the cable from the push button to the last driver is 200 meters

8. Packing information

| Packing way | Model | Colour | Carton L*W*H(mm) | Pcs/ Carton | Net weight/ Pcs(kg) | Net weight/ Carton(kg) | Gross weight/ Carton(kg) |
|-------------|--------------------------|--------|------------------|-------------|---------------------|------------------------|--------------------------|
| Industrial | LV160W24CG DALIDT6/8 2CH | White | 410*220*140 | 20 | 0.45 | 9 | 11.0 |



9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advise the maximum length of output wires is 0.5 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- Hot plug-in is not supported due to residual output voltage of > 0 V up to mains voltage. Danger to life.
- When connecting an LED load, restart the device to activate the LED output.
- This can be done via mains reset or via interface (DALI, DSI, switch DIM).

10. Replace LED module

- Remove LED module
- Wait for 30 seconds
- Connect LED module again
- Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs

11. Functions

11.1 OEM Identification

The OEM (Original Equipment Manufacturer) can set his own identification number.

11.2 OEM GTIN

The Original Equipment Manufacturer (OEM) can set his own Global Trade Item Number (GTIN).

11.3 Luminaire data

This function provides the asset management with accurate data about the luminaire.

12.4 LED current

The LED output current must be adapted to the connected LED module.

The value is limited by the current range of the respective device.

The output current of the LED driver can be adjusted in a certain range.

Adjustment is done by KGP Configurator via NFC.

More functions:



| Action | Action duration | Function |
|-----------------------|-----------------|---|
| Short push | <0.6s | Turn on/off |
| Short push five Times | <3s | Quit Corridor mode |
| Long push | 0.6-3s | Dimming up or down |
| Long push | 10s | Sync all LEDs to be 50% brightness, and the dimming rate is changed to 3S |
| Long push | 20s | Dimming rate is changed to 6S |
| Long push | >2mins | Enter Corridor mode - LED keep 100% brightness for 2mins. |

11.5 Switch DIM

Integrated Switch DIM function allows a direct connection of a push button for dimming and switching.

Brief push (< 0.6 s) switches LED driver ON and OFF. The dim level is saved at power-down and restored at power-up. When the push button is held, LED modules are dimmed. After repush the LED modules are dimmed in the opposite direction.

In installations with LED drivers with different dimming levels or opposite dimming directions (e.g. after a system extension), all LED drivers can be synchronized to 50 % dimming level by a 10 s push.

Use of push button with indicator lamp is not permitted.


11.6 Corridor FUNCTION

With the Corridor FUNCTION and a commercially available motion detector, it is easy to adapt the lighting in one area to its use.

That is, when the area is entered by a person, the lighting dims instantly to the desired brightness and is available in full strength.

After the area is left by the person, the brightness dims slowly to a smaller value or switches off completely.

The individual parameters of the desired profile, such as brightness values or delay times, can be adjusted flexibly and individually.

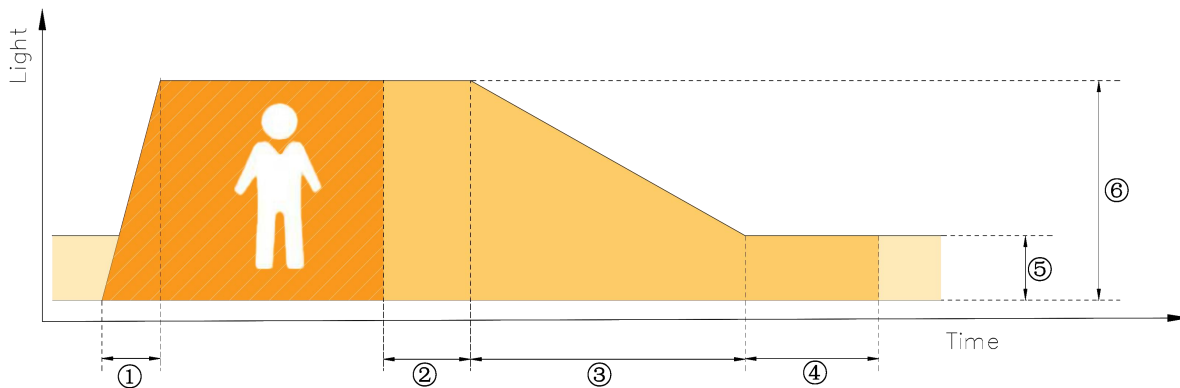

- ① Fade-in time(1s): the time that starts as soon as the presence of a person is detected. During the fade-in time the luminous intensity is faded up to the presence value.
- ② Run-on time(120s): the time that starts as soon as the presence of a person is no longer detected. If the presence of a person is detected again during the run-on time the run-on time is restarted from zero. If no presence is detected during the run-on time the fade time is started as soon as the run-on time expires.
- ③ Fade time(32s): the time during which the luminous intensity is faded from the presence value to the absence value.
- ④ Switch-off delay (Never Off): the time during which the absence value is held before the lighting is switched off. Depending on the profile selected the switch-off delay may have different values or may not be defined.
- ⑤ Absence value(default: 10 %): the luminous intensity when there is no person present.
- ⑥ Presence value (default: 100 %): the luminous intensity when persons are present.

11.7 Constant Light Output (CLO)

With this function the light output of the LED module can be kept equal over the lifetime.

The light output of an LED module reduces over the course of its lifetime.

The Constant Light Output (CLO) function compensates for this natural decline by constantly increasing the output current of the LED driver throughout its lifetime.

CLO shall be achieved by limitation of the LED current at the commissioning of the LED driver and providing a linear interpolation of the current over the time, depending on the data points given by the user.

The user has to insert up to eight pairs of data (time, level).

The output curve is the result of connecting the user data points linear.

Detailed description for CLO see product manual.

The minimal CLO starting point is limited by the smallest output current of the LED driver.

11.8 Dimming curve

DALI: The desired dimming behaviour is selected via two different dimming curves (logarithmic or linear).

The default setting of the dimming behaviour is logarithmic.



12. REVISION HISTORY

| DATE | REV | Modification details |
|----------|------|----------------------|
| 2025-5-9 | V1.0 | Initial release. |
| | | |
| | | |
| | | |
| | | |
| | | |