

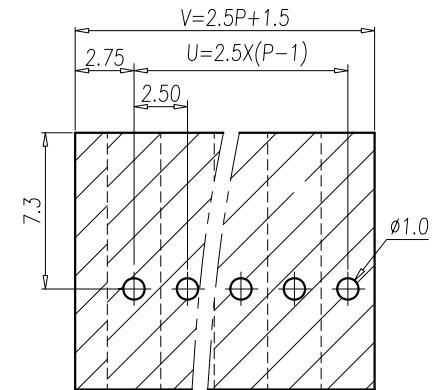
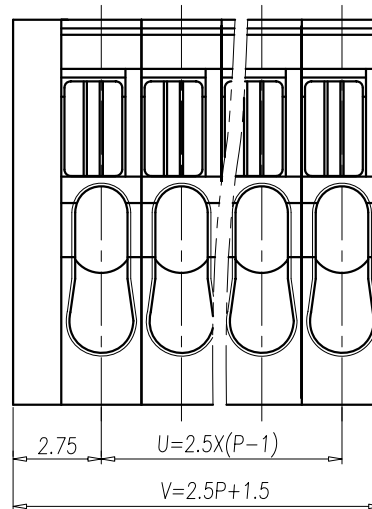


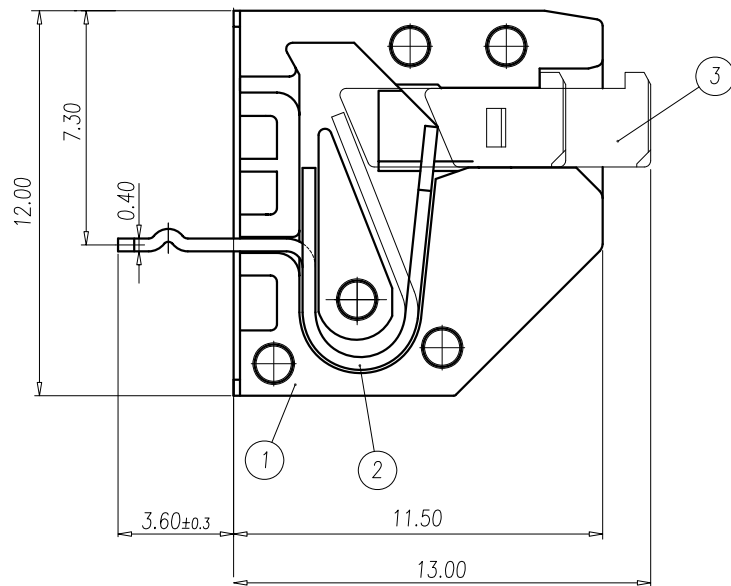

P.C.B. LAYOUT

NOTES:

- Rating: 150 V 2 A (IEC 130V)
PITCH: 2.50mm
- Insulation Withstands Voltage:
AC2500 V at 1 minute
- Insulation Resistance:
500M Ω or more at DC500V
- Using Temperature Range:
-40°C~+105°C
- Suitable Electric Wire: 20~28 AWG
- RoHS Compliance

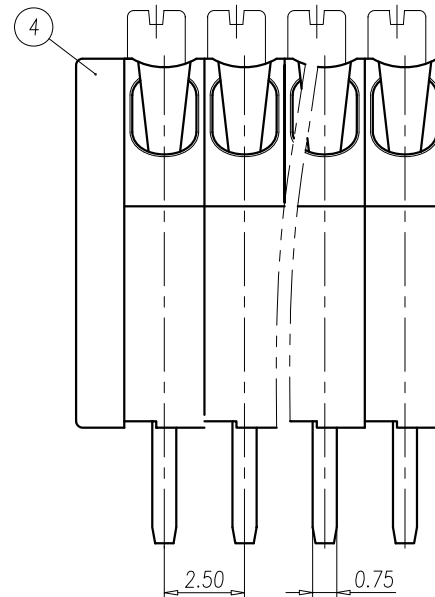

Normal Geometric Tolerancing					
—	//	$\equiv$	$\perp$		
0 to 100	0.2		0 to 10	0.2	
over 100 to 150	0.3	0.3	over 10	0.3	
over 150	0.5				
Total Pitch Tolerances		Normal dimension Tolerances			
0<U<=30	±0.20	0~30	±0.25		
30<U<=53	±0.25	over 30~53	±0.30		
53<U<=70	±0.30	over 53~70	±0.35		
70<U<=90	±0.35	over 70~90	±0.44		
90<U<=115	±0.44	over 90~115	±0.55		
115<U<=150	±0.55	over 115~150	±0.70		
150<U<=200	±0.70	over 150~200	±0.85		
200<U<=250	±0.85	over 200~250	±1.00		
250<U<=320	±1.00	over 250~320	±1.20		

4	COVER	PA66	UL94-V0 GREY
3	LEVER	PA66	UL94-V0 GREY
2	CLAMP	COPPER ALLOY	Tin PLATED
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	WXY	DATE	10.01.26	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	6:1 (:)		
APP.		DATE				NAME	0136-11XX
						DWG NO.	SP-03-013610XX

REV.	CONTENT	CHK.	DATE



DINKLE
ENTERPRISE CO., LTD