

Product Datasheet



The global certified BLD-096-C is a dual stage D4i/DALI2 LED driver. 10kV surge protection level, 100khour long life and 7-year warranty provide high confidence to luminaire users. It supports high accuracy energy report and all D4i related requirement. NFC programming makes driver setting easier for users. All around protections including digital OTP with auto-recovery secure 24hour non-stop operation for luminaires.

☒ Street ☒ Flood ☒ Tunnel ☒ Shoe box ☒ Architectural



■ Features.....	2
■ Model List.....	2
■ Technical Data	3
■ Safety/EMC Compliance.....	4
■ Dimming	4
■ Programming.....	5
■ Lifetime vs. Case Temperature.....	7
■ Power Factor vs. Load	7
■ THD vs. Load	8
■ Efficiency vs. Load	8
■ Inrush Current	11
■ Dielectric Strength.....	11
■ Tc Point.....	12
■ Packaging Information	12
■ Mechanical Design	13
■ Output Operation Range.....	15
■ Revision History.....	18

96W, D4i Compatible, NFC Programmable LED Driver

■ Features

- Supply Voltage: 90~305Vac or 127-420Vdc, 186-250Vdc with EL Mark
- Great Surge Immunity 10kV
- -60C Ambient Startup Option
- D4i/DALI2.0 Comply with IEC62386-101,102,150,207,250,251,252,253
- Integrated 16Vdc Bus Power Supply
- $\pm 1\%$ Energy Report Accuracy
- Dim Off with 0.5W Standby Power
- 24V 3W (10W Transient Peak) Aux-Power
- 100,000Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- Airset™ NFC Programmability
- EL Mark with Programmable EOFx
- Dim Off with 0.5W Standby Power
- UL Class P, ENEC/CB/CCC SELV Output
- Class II Model Available
- Global Certified Model Available
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max
BLD-096-C070-ARZ	90~305Vac or 127-420Vdc	96 W	82-192Vdc	500mA	700mA
BLD-096-C105-ARZ		96 W	55-137Vdc	700mA	1050mA
BLD-096-C105-TRS-AMP000		96 W	55-137Vdc	700mA	1050mA
BLD-096-C140-ARZ		96 W	41-91Vdc	1050mA	1400mA
BLD-096-C210-ARZ		96 W	27-69Vdc	1400mA	2100mA
BLD-096-C280-ARZ		96 W	21-46Vdc	2100mA	2800mA

Note:

1. Add suffix –AMP000 to indicate AmpDim.
2. Add suffix –D00000 to indicate the D4i model without 24Vaux.
3. Add suffix –DAX000 to indicate the D4i model with 24Vaux.
4. See the **Output Operation Range Section** for programmable model details.

XY=	Dimming Method	Programmable	12Vaux	Dim-off
NN	-	-	-	-
DN	0-10V	Cable	-	No Dim-off as default status, programmed to have Dim-off
EN	0-10V	Cable	300mA	√
TR	Time/Set Current	NFC Wireless	-	-
DR	0-10V	NFC Wireless	-	No Dim-off as default status, programmed to have Dim-off
ER	0-10V/PWM/Time	NFC Wireless	300mA	√
AR	DALI2.0	NFC Wireless	-	√
MR	DMX512 or RDM	NFC Wireless	-	√

96W, D4i Compatible, NFC Programmable LED Driver

Z=	U	V	S	S-GLBD00	W	D
Input Cable	3 pin UL cable with ground	3 pin UL cable with ground	3 pin VDE cable with ground	3 pin Global cable with ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Output Cable	2 pin UL cable without Ground	3 pin UL cable with ground	2 pin VDE cable without ground	2 pin Global cable without ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Certified Input Voltage Range	UL Listed Class P FCC 120-277Vac	UL Listed Class P FCC 120-277Vac	ENEC CB RCM Class I 220-277Vac	UL Recognized 120-277Vac ENEC CB RCM Class I 220-277Vac	Class I 120-277Vac	ENEC CB Class II 220-277Vac

Technical Data

Input Voltage	90~305Vac or 127-420Vdc
Input Frequency	47~63Hz
Power Factor	>0.9@65-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	0.95Amax@120Vac & Full-Load, 0.48Amax@220Vac & Full-Load
Inrush Current	See Inrush Current Section in the datasheet
Leakage Current	0.75MIU max @277Vac 60Hz, UL8750 0.7mA max @240Vac 50/60Hz, IEC60598-1
Input Under Voltage	Shut down and auto-restart
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±2%lo for programmable model, ±5%lo for non-programmable model
Ripple Current	Ip-p:5%lo max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	120% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 110 \pm 5^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 5^\circ\text{C}$
Auxiliary Power (Vaux)	24V+/-5%, 3W (10W Transient Peak)
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	-40°C~+85°C; 5%RH~100%RH
MTBF	≥320,000 hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	≥100,000 hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimensions	5.20x2.66x1.52 by inch (body), 6.22x2.66x1.52 by inch (endcaps included) 132.0x68.0x38.5 by mm (body), 158.0x68.0x38.5 by mm (endcaps included)
Net Weight	800g
Packing	See Package Information Section in the datasheet

Notes: Unless specified, all the test results are measured in 25°C room temperature.

■ Safety/EMC Compliance

Safety Standards	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012/1310	Power units other than class 2 / Class 2 power units
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
IEC 62384	DC or AC supplied electronic control gear for LED modules - Performance requirements
IEC 55015/FCC Part 15	Conducted emission test & radiated emission test; ANSI C63.4:2009 Class B
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment

■ Dimming


Parameter	Min.	Typ.	Max.
DALI Interface Standard	IEC62386-101,102,150,207,250,251,252,253		
Dimming Range	10%	Logarithmic (default)	100%
DA1,DA2 High Level	9.5V	16V	22.5V
DA1,DA2 Low Level	-6.5V	0	6.5V
DA1,DA2 Current	0		2mA
Bus Power Supply Voltage	12Vdc	16Vdc	20Vdc
Bus Power Supply Current	52mA	-	60mA
Auxiliary Power Voltage	21.6V	24V	26.4V
Auxiliary Power	3W	-	4W
Auxiliary Power Endurance @6W	3.8ms/6ms	-	4.5ms/6ms
Auxiliary Power Endurance @10W	1.8ms/6ms	-	2.2ms/6ms
Bus Power Supply Current	52mA	-	60mA
Fast Dimming On-Off Transition		300ms	
Fast Dimming 10-100% Io Transition		70ms	

96W, D4i Compatible, NFC Programmable LED Driver

■ Programming

- Programmable Functions

uPowerTek LED drivers offer a range of configurable functions to meet specific lighting requirements. The Output Current, Dimming Mode, Dim Off/On Voltage Threshold, and Timer Dimming can be set as basic programming functions. Constant Lumen Output (CLO) can also be customized to ensure consistent light performance. Additionally, depending on the different product model numbers, users can benefit from programming Thermal Protection by external NTC (with extra cable), DALI/D4i Features, and DMX addressing.

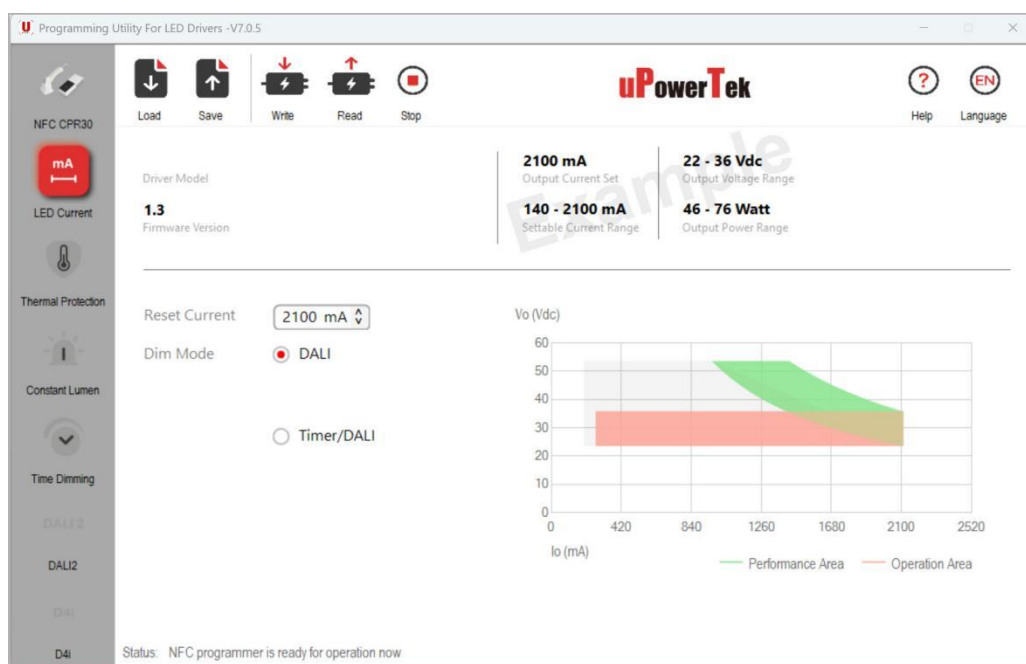

uPowreTek Programming Software Interface

- Required Equipment

To program uPowerTek LED drivers, users will need specific equipment based on their preferred method. For NFC wireless programming, users can use a smartphone with either IOS or Android, the uPowerTek NFC Programmer, or the FEIG NFC Programmers. These tools ensure a seamless and efficient setup process, realizing precise customization of the LED driver settings.



NFC Programmer V1



NFC Programmer V2



FEIG NFC Programmer



Android or iPhone

96W, D4i Compatible, NFC Programmable LED Driver

- Connection Guide

This guide provides simple connection diagrams to help users understand the programming system. For more detailed operating instructions, including step-by-step procedures and additional configurations, please visit our website. You can download the comprehensive user manual and necessary software from the following link:

<https://www.upowertek.com/download-2/>.




Wireless Programming




Cellphone Programming

Lifetime vs. Case Temperature

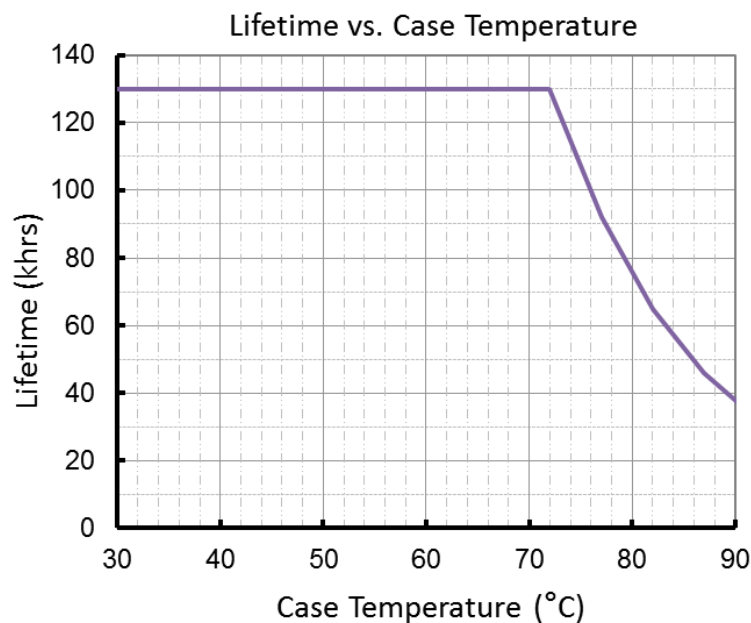


(End of Life: Maximum Failure Rate=10%)


Power Factor vs. Load

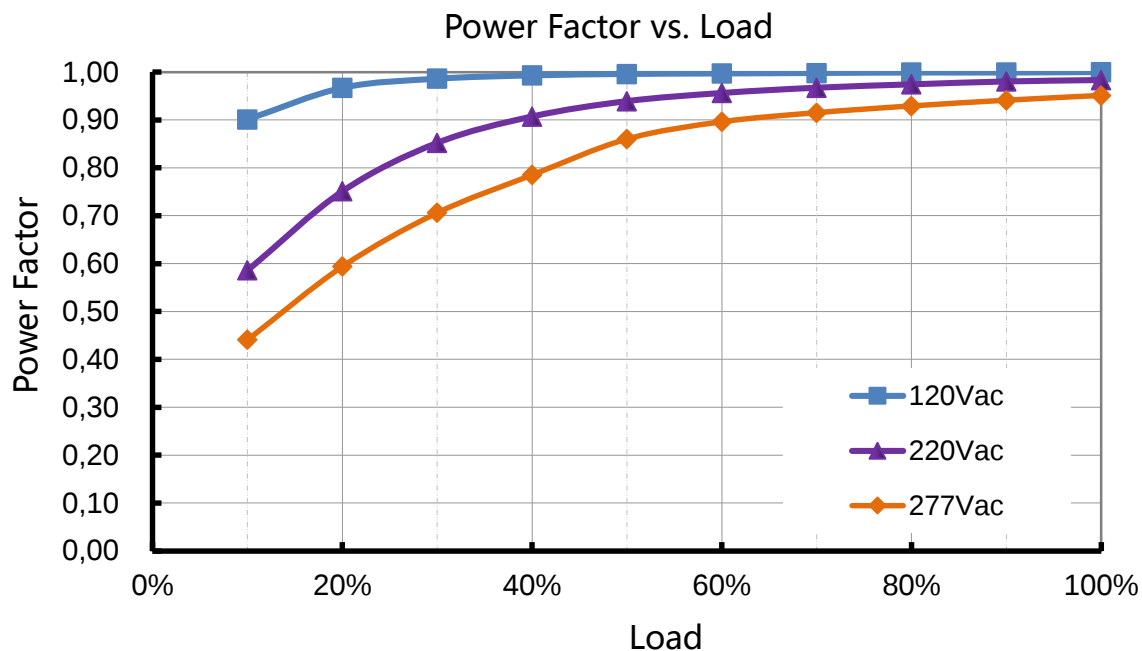


THD vs. Load

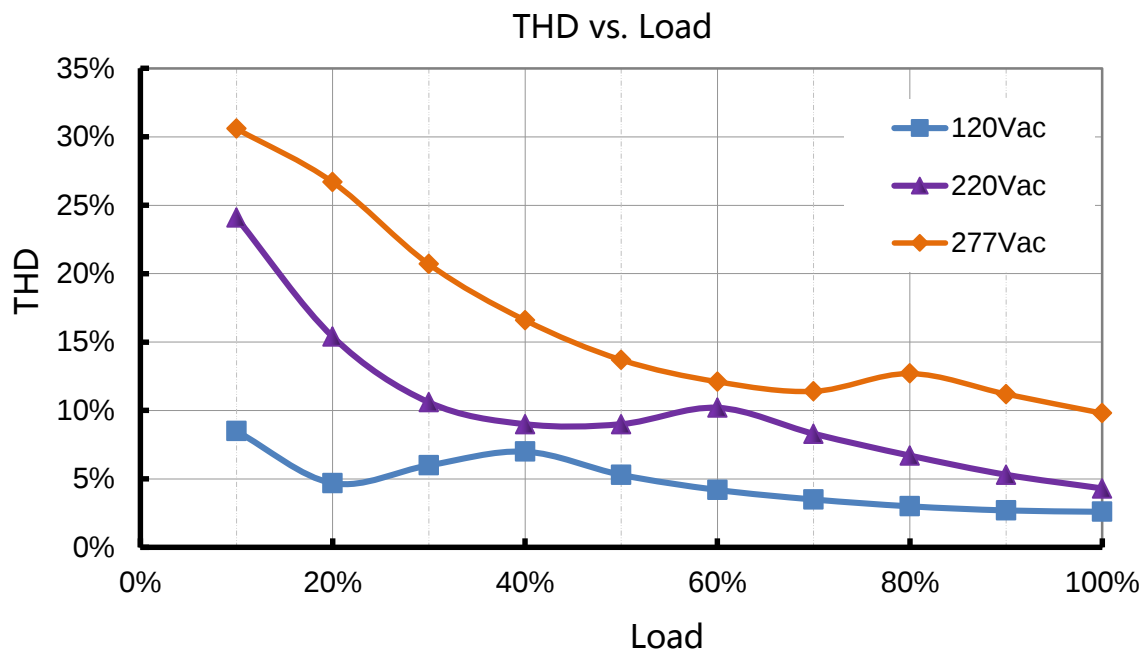


Efficiency vs. Load

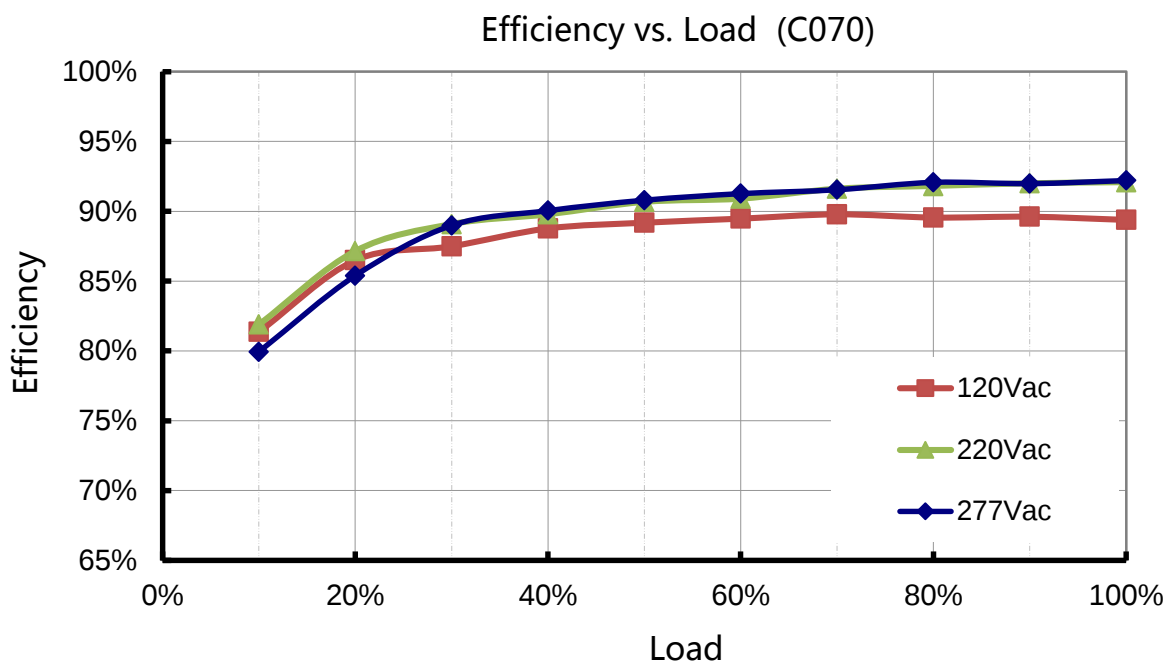


Efficiency vs. Load (C105)

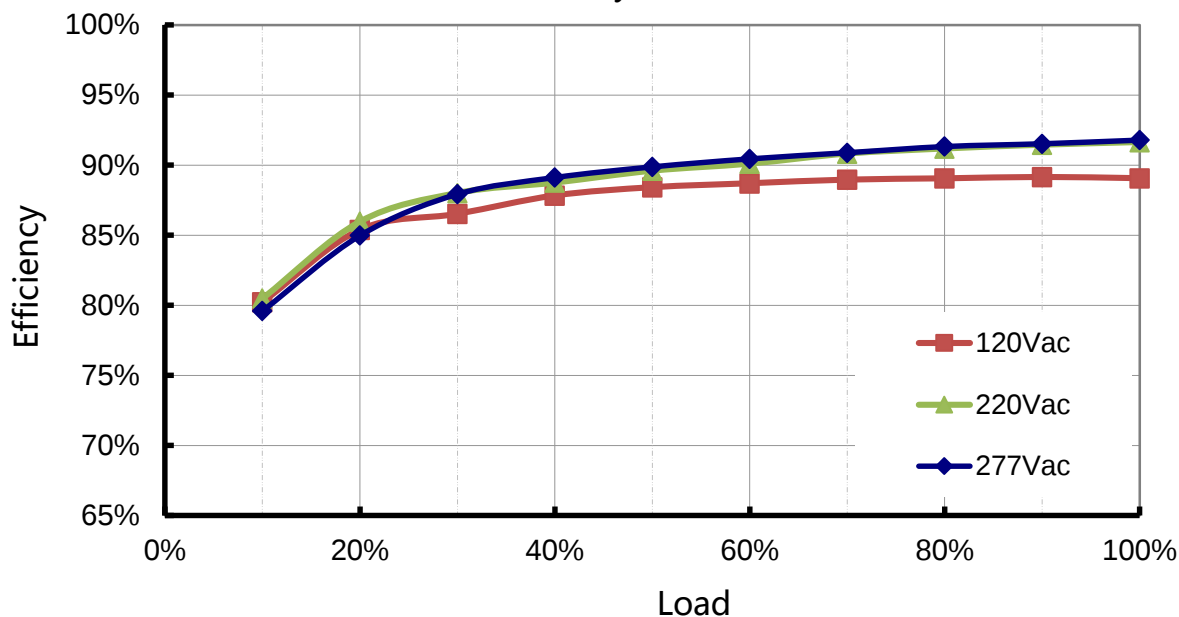


Efficiency vs. Load (C140)

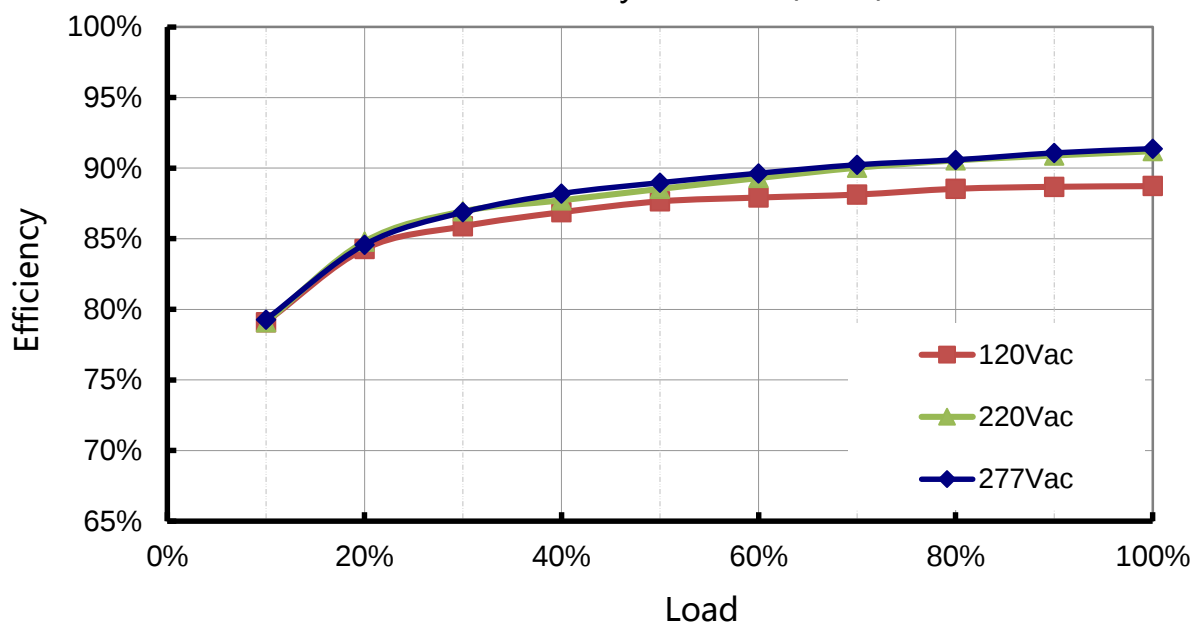


Efficiency vs. Load (C210)

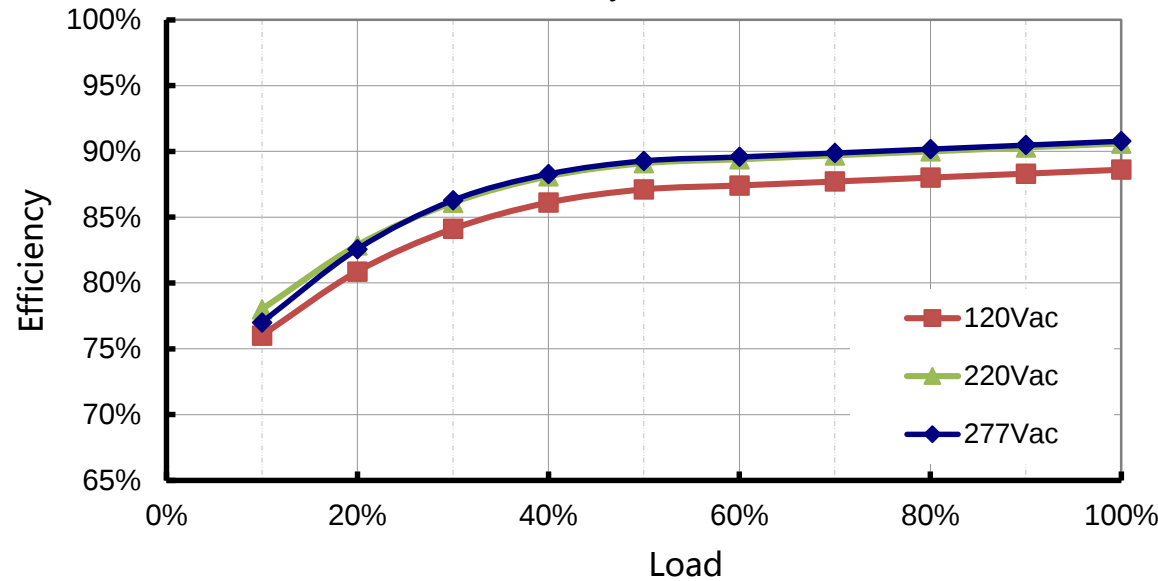

Efficiency vs. Load (C280)

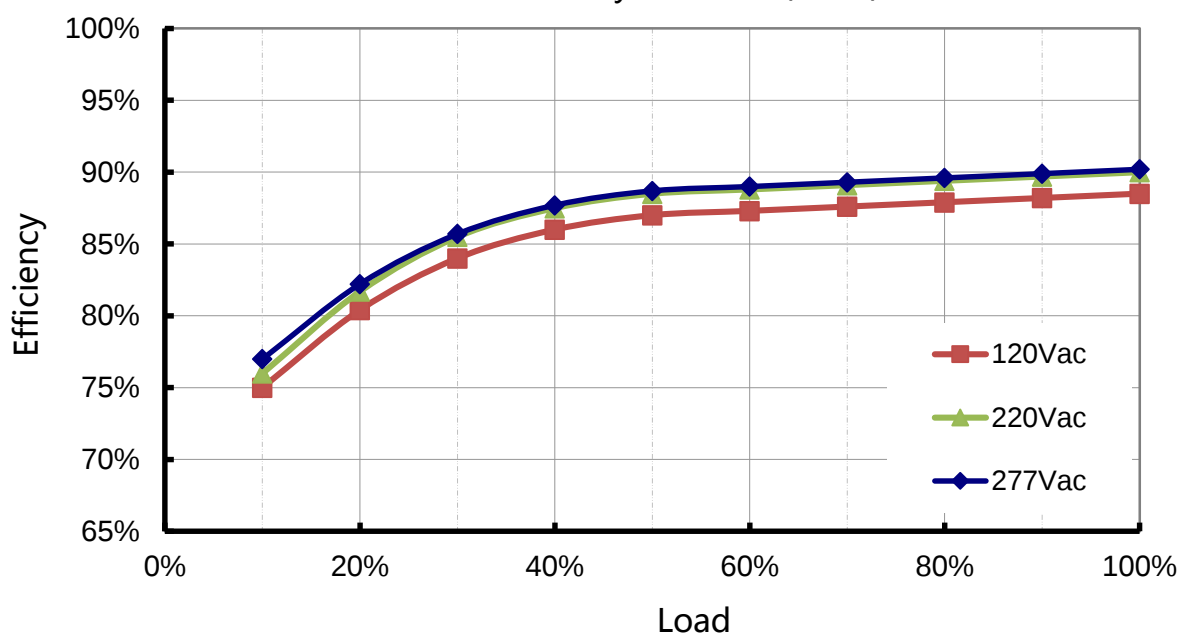

Inrush Current

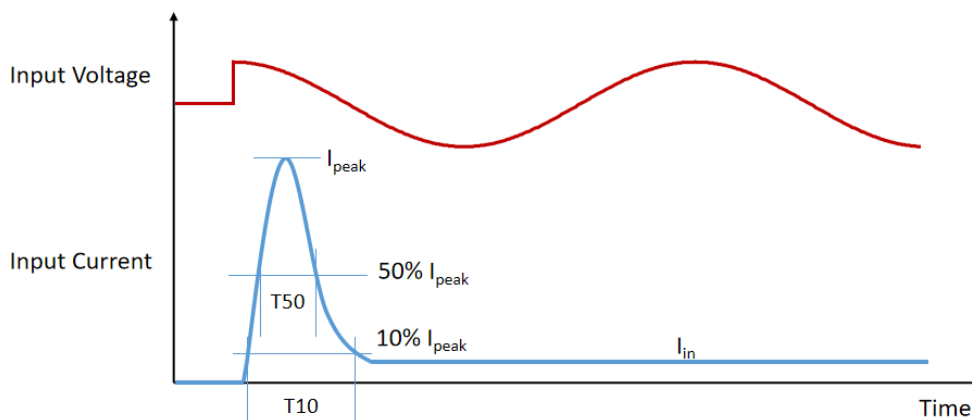

Input Voltage	I_{peak}	10% -10% T10 Duration	50% -50% T50 Duration
120Vac	37A	464 μ s	180 μ s
220Vac	66A	412 μ s	170 μ s
277Vac	90A	424 μ s	172 μ s

- MCB Suggestion


Type	B10	B16	B25	B32	C10	C16	C25	C32	D10	D16	D25	D32
Driver Quantity	7	11	18	23	12	19	30	38	16	25	40	51

Note: Calculated with MCB S200 series manufactured by ABB at 220Vac Input condition

Dielectric Strength


Unit: Vac	Input	Output	Dimming	Case
Input	-	3750	3750	1554
Output	3750	-	1554	1554
Dimming	3750	1554	-	1554
Case	1554	1554	1554	-

Tc Point

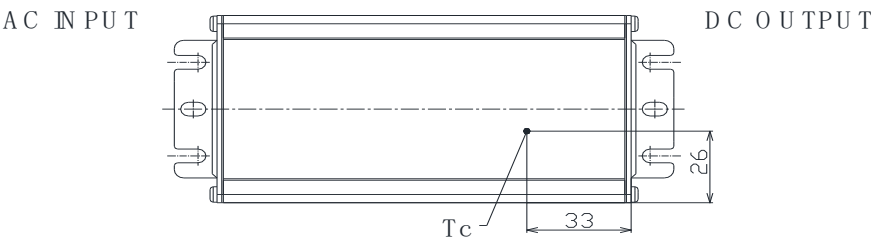


Packaging Information

Typical Carton Dimension(L×W×H)	490×280×165 mm
Positioning plate	3pcs/carton
Shield Board	1pcs/carton
LED Drivers/LED	15pcs/carton
Net Weight	10.3 kg/carton
Gross Weight	11.4 kg/carton

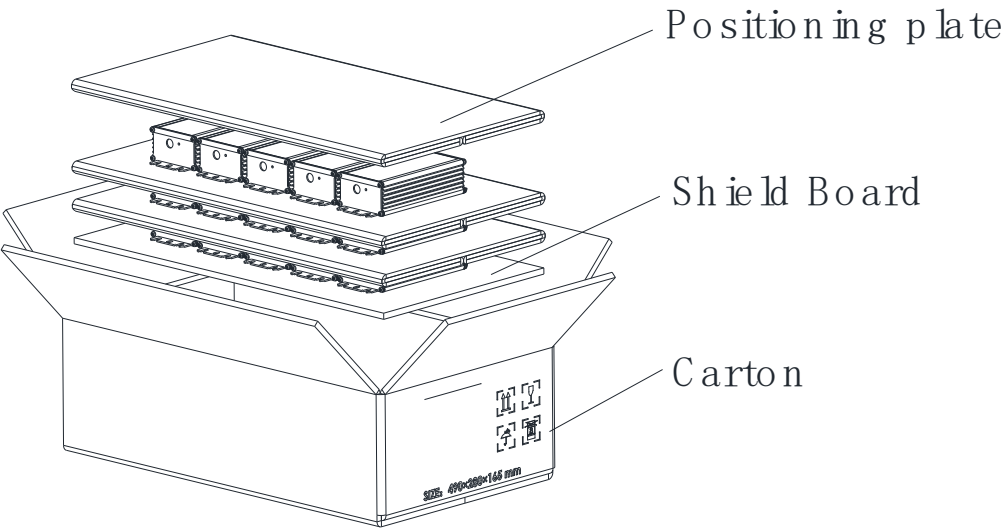


Mechanical Design


BLD-096-Cxxx-ARU (UL Cable without Vaux)

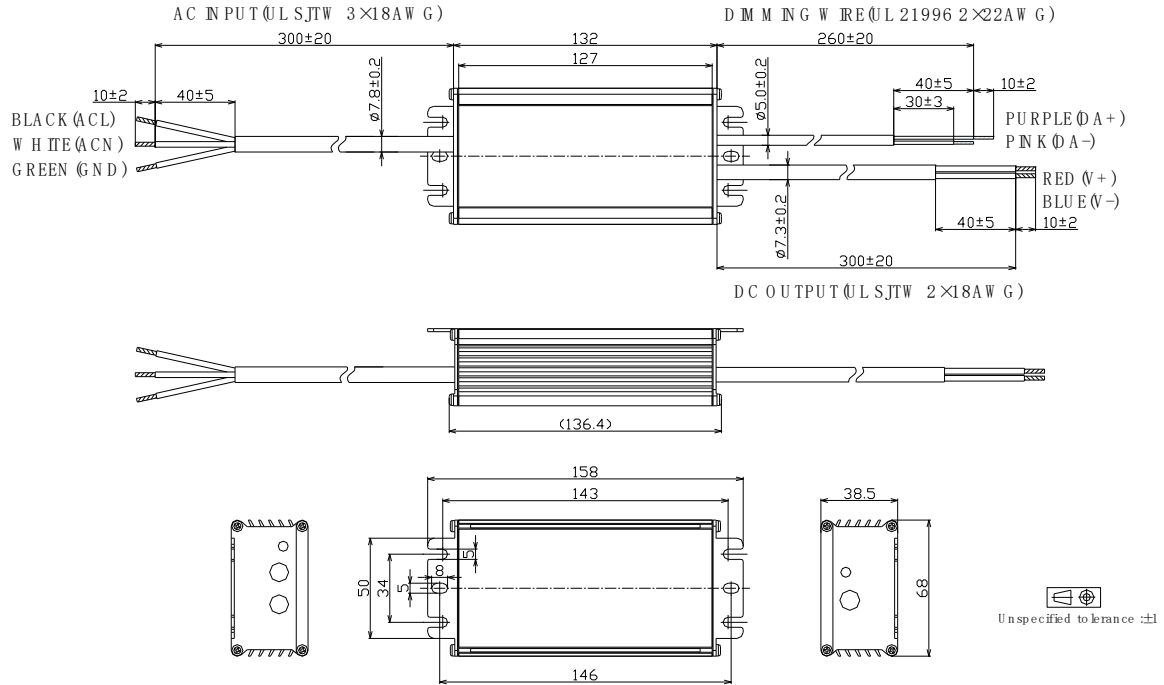


BLD-096-Cxxx-ARS (VDE Cable without Vaux)

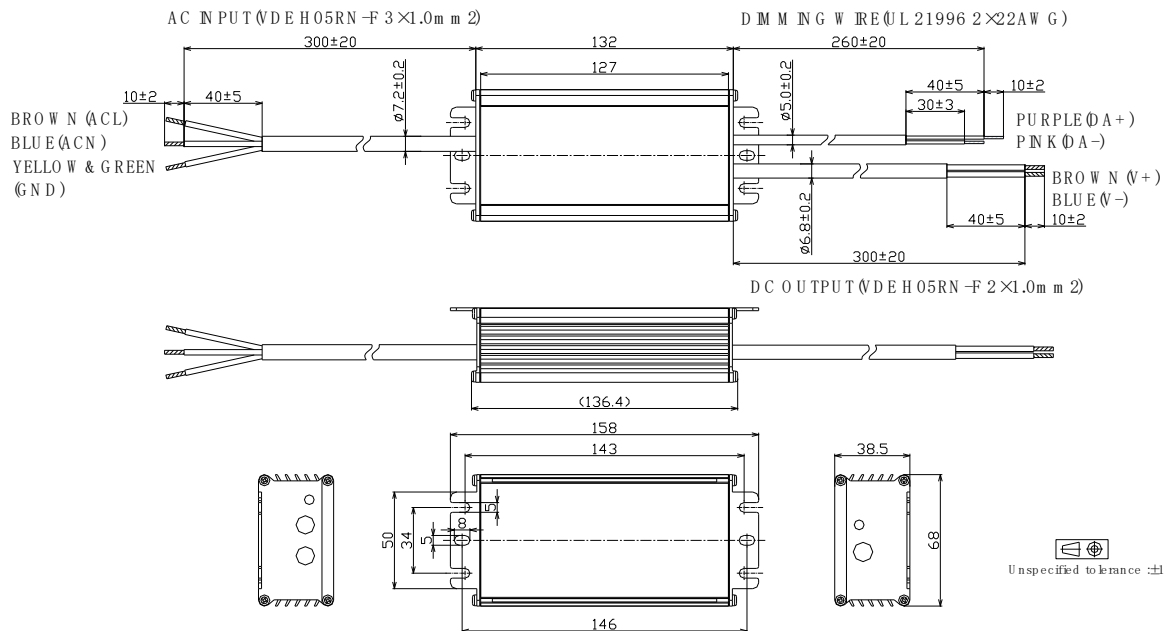


- BLD-096-Cxxx-ARU (UL Cable with Vaux)

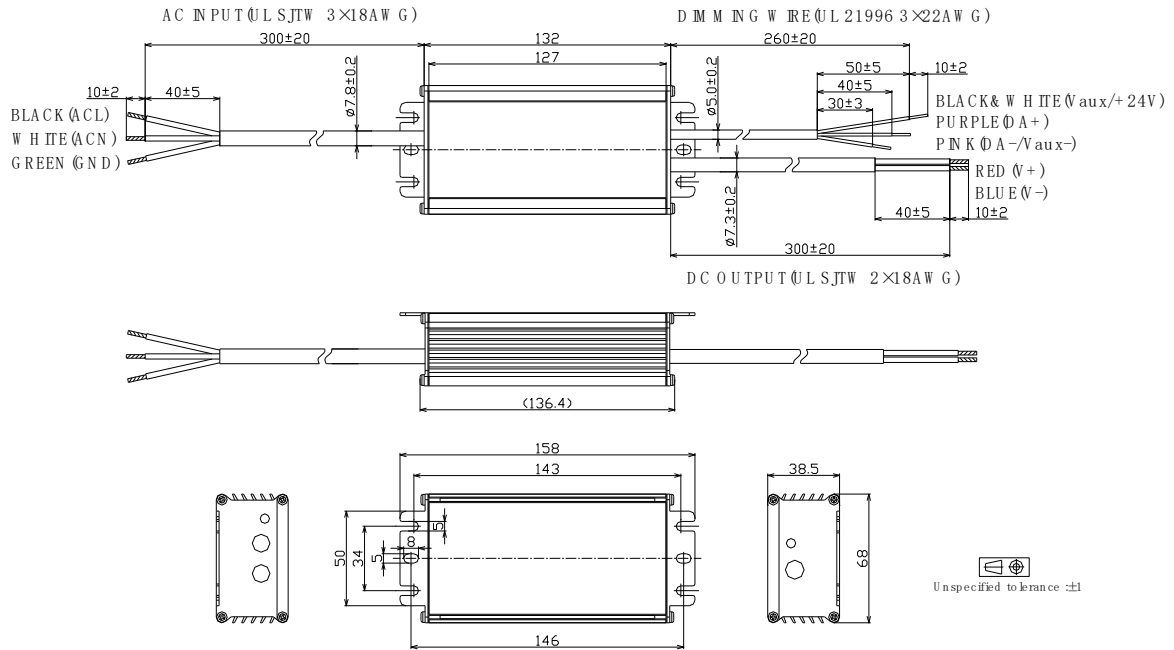

- BLD-096-Cxxx-ARS (VDE Cable with Vaux)

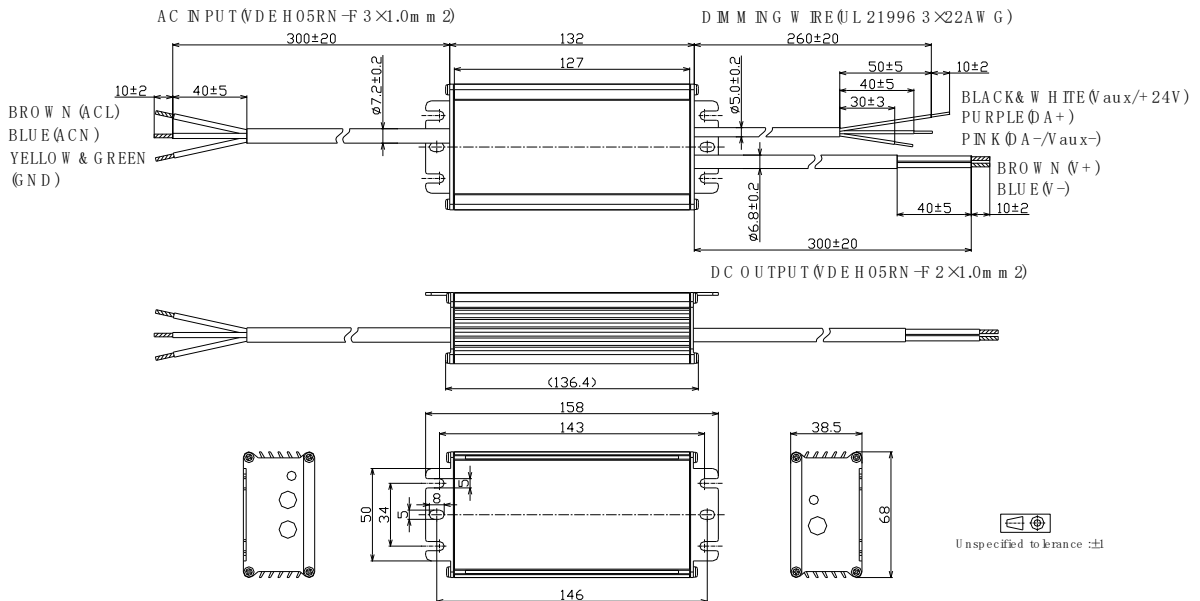

- BLD-096-C105-TRS-AMP000 (VDE Cable)

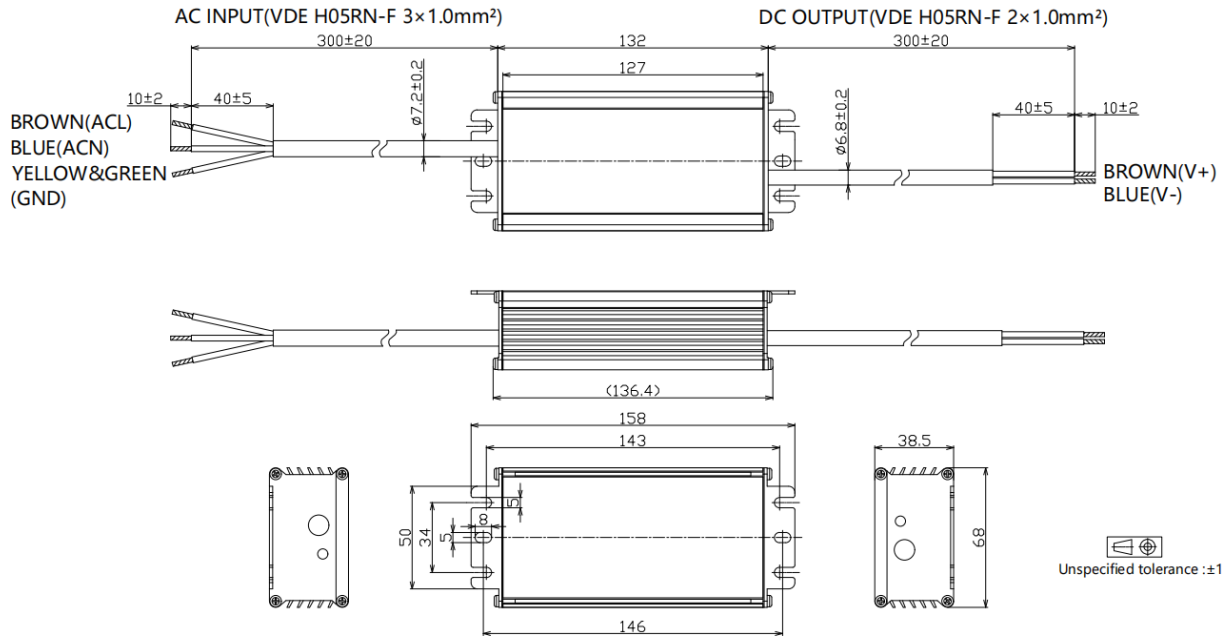

Amp Dim Customization: Linear dimming, with accuracy ±5%

input voltage 220V / output 100%
input voltage 215V / output 95%
input voltage 210V / output 90%
input voltage 205V / output 85%
input voltage 200V / output 80%
input voltage 195V / output 75%
input voltage 190V / output 70%
input voltage 185V / output 65%
input voltage 180V / output 60%
input voltage 175V / output 55%
input voltage 170V / output 50%

■ Output Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C070	700	96	82	137	70
	650	96	89	148	65
	600	96	96	160	60
	550	96	105	175	55
	500	96	115	192	50
	450	86	115	192	50
	400	77	115	192	50
	350	67	115	192	50
	...	...	...	...	...
	50	10	115	192	50

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C105	1050	96	55	91	105
	1000	96	58	96	100
	950	96	61	101	95
	900	96	64	107	90
	850	96	68	113	85
	800	96	72	120	80
	750	96	77	128	75
	700	96	82	137	70
	650	89	82	137	70
	600	82	82	137	70
	550	75	82	137	70
	500	69	82	137	70
	...	...	...	...	...
	70	10	82	137	70

96W, D4i Compatible, NFC Programmable LED Driver

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C140	1400	96	41	69	140
	1300	96	44	74	130
	1200	96	48	80	120
	1100	96	52	87	110
	1050	96	55	91	105
	1000	91	55	91	105
	950	87	55	91	105
	900	82	55	91	105
	850	78	55	91	105
	800	73	55	91	105
	750	69	55	91	105
	700	64	55	91	105
	...	...	...	...	...
	105	10	55	91	105

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C210	2100	96	27	46	210
	2000	96	29	48	200
	1900	96	30	51	190
	1800	96	32	53	180
	1700	96	34	56	170
	1600	96	36	60	160
	1500	96	38	64	150
	1400	96	41	69	140
	1300	89	41	69	140
	1200	82	41	69	140
	1100	75	41	69	140
	1000	69	41	69	140
	...	...	...	...	...
	140	10	41	69	140

96W, D4i Compatible, NFC Programmable LED Driver

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C280	2800	96	21	34	280
	2700	96	21	36	270
	2600	96	22	37	260
	2500	96	23	38	250
	2400	96	24	40	240
	2300	96	25	42	230
	2200	96	26	44	220
	2100	96	27	46	210
	2000	91	27	46	210
	1900	87	27	46	210
	1800	82	27	46	210
	1700	78	27	46	210
	...	...	...	...	...
	210	78	27	46	210

■ Revision History

Revision	Date	Contents
A	2022-04-22	1. Initial Release
B	2023-7-14	1. Update cable selection table in Model List Section
C	2023-10-08	1. EL mark with programmable EOFx added
D	2024-07-25	1. Fast dimming description added 2. Power factor, THD, efficiency curves updated by 10-100% load range 3. MCB usage and driver quantity section added 4. Inrush current data updated
E	2026-09-07	1. Add the AmpDim model