




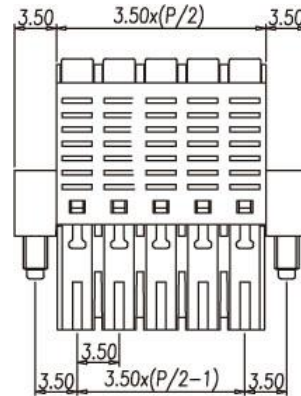

0156 S-Cage series

0156-2AXX

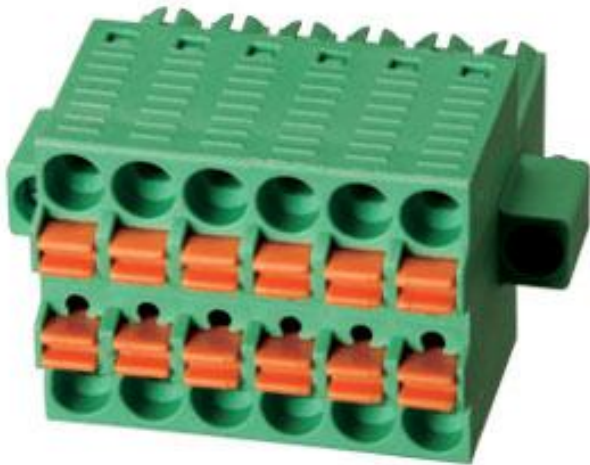

Pitch: 3.50mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	150V	320V
Rated current	8A	10A
Conductor cross-section, solid (AWG/ mm ²)	24~16 / 0.2~1.5	
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)		
Torque (N-m)		
Screw		
Wire strip length	7~8mm	
Pole	Cat. No.	
3X2	0156-2A06	
:	:	
:	:	
20X2	0156-2A40	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw