



Spring plugs for pluggable terminal blocks / 0221 series

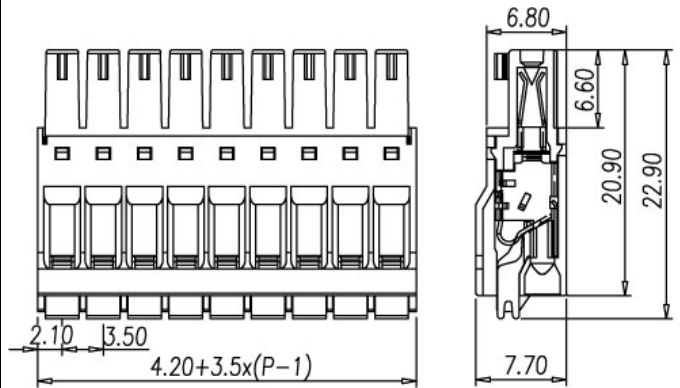

0221-20XX

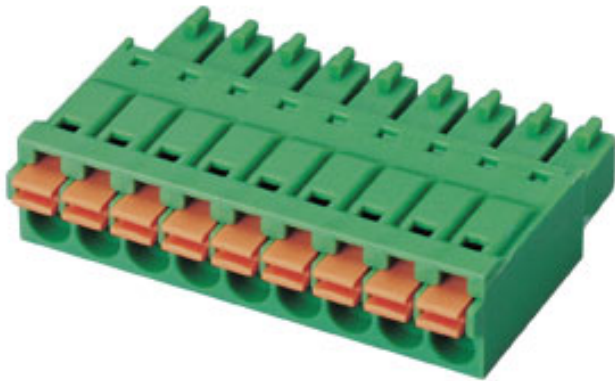

0221-20XX
0221-20 - series of terminal blocks
XX - number of Positions (number of Pins/Poles)

Pitch: 3.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	8A	6A
Conductor cross-section, solid (AWG/ mm ²)	24~16 / 0.5~1	
Conductor cross-section, flexible (AWG/ mm ²)	24~16 / 0.5~1	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)		
Screw		
Wire strip length	8mm	
Pole	Cat. No.	
02	0221-2002	
:	:	
:	:	
20	0221-2020	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw