
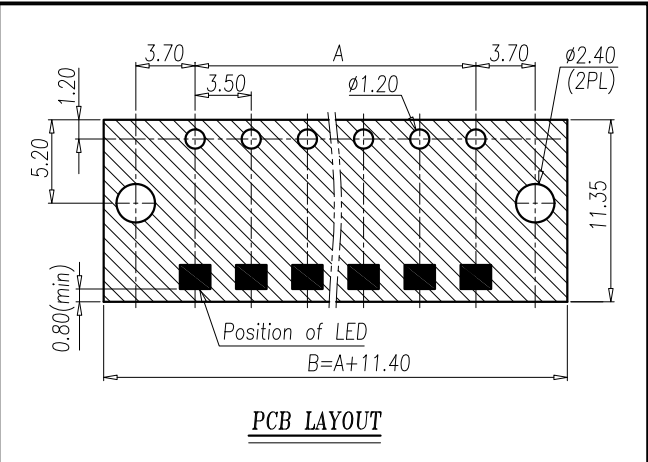
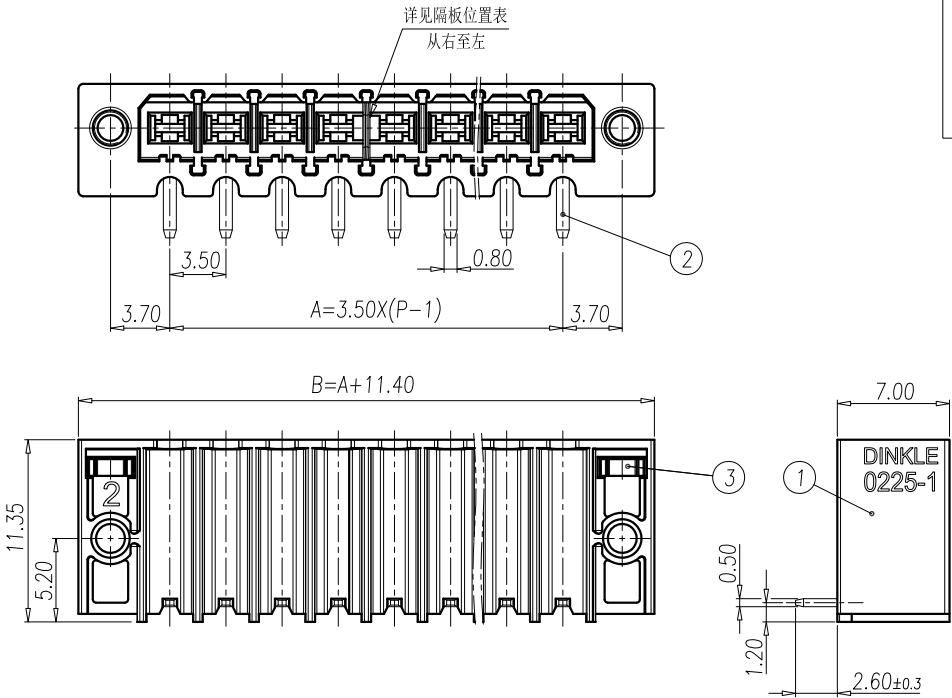


P	2	3	4	5	6	7	8	9
A	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0
B	14.9	18.4	21.9	25.4	28.9	32.4	35.9	39.4
P	10	11	12	13	14	15	16	17
A	31.5	35.0	38.5	42.0	45.5	49.0	52.5	56.0
B	42.9	46.4	49.9	53.4	56.9	60.4	63.9	67.4
P	18	19	20	21	22	23	24	
A	59.5	63.0	66.5	70.0	73.5	77.0	80.5	
B	70.9	74.4	77.9	81.4	84.9	88.4	91.9	



各P数对应隔板位置表

P数	位置	1~2	2~3	3~4	4~5	5~6	6~7	7~8	8~9	9~10	10~11	11~12	12~13	13~14	14~15	15~16	16~17	17~18	18~19	19~20	20~21
2~4P	无隔板																				
5P																					
6P																					
7P																					
8P																					
9P																					
10P																					
11P																					
12P																					
13P																					
14P																					
15P																					
16P																					
17P																					
18P																					
19P																					
20P																					
21P																					
22P																					
23P																					
24P																					

NOTES 1:

UL Standard :

1. Rating: 300V 8A
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Using Temperature Range:
-40°C~+120°C

IEC Standard :

1. Rating: 630V 15A
2. Rate Impulse Voltage: 4000V
3. Insulation Resistance:
500MΩ or more at DC500V

4. Material Group : I

5. Pollution Degree : 2

6. Overvoltage Category: II

7. Using Temperature Range:
-40°C~+120°C

NOTES 2:

1. RoHS compliance
2. Through hole reflow soldering
Temperature: 245°C

3	NUT	STEEL	M2/Zn Plated
2	SOLDER PIN 1	COPPER ALLOY	Tin Plated
1	HOUSING	HIGH-TEMPERATURE PLASTICS	UL94-V0 BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

DWG.	LWF	DATE	18.05.28	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	3:1 (:)		
APP.		DATE		NAME	0225-13XXL		
 DINKLE ENTERPRISE CO.,LTD				DWG NO.	SP-03-0225130L		

REV.	CONTENT	NAME	DATE