






REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△	10-0257	修改外观	Jinhu.i. Lan	08/13/10
△	11-0103	修改螺帽孔结构, 变更料号	YHG	05/06/11

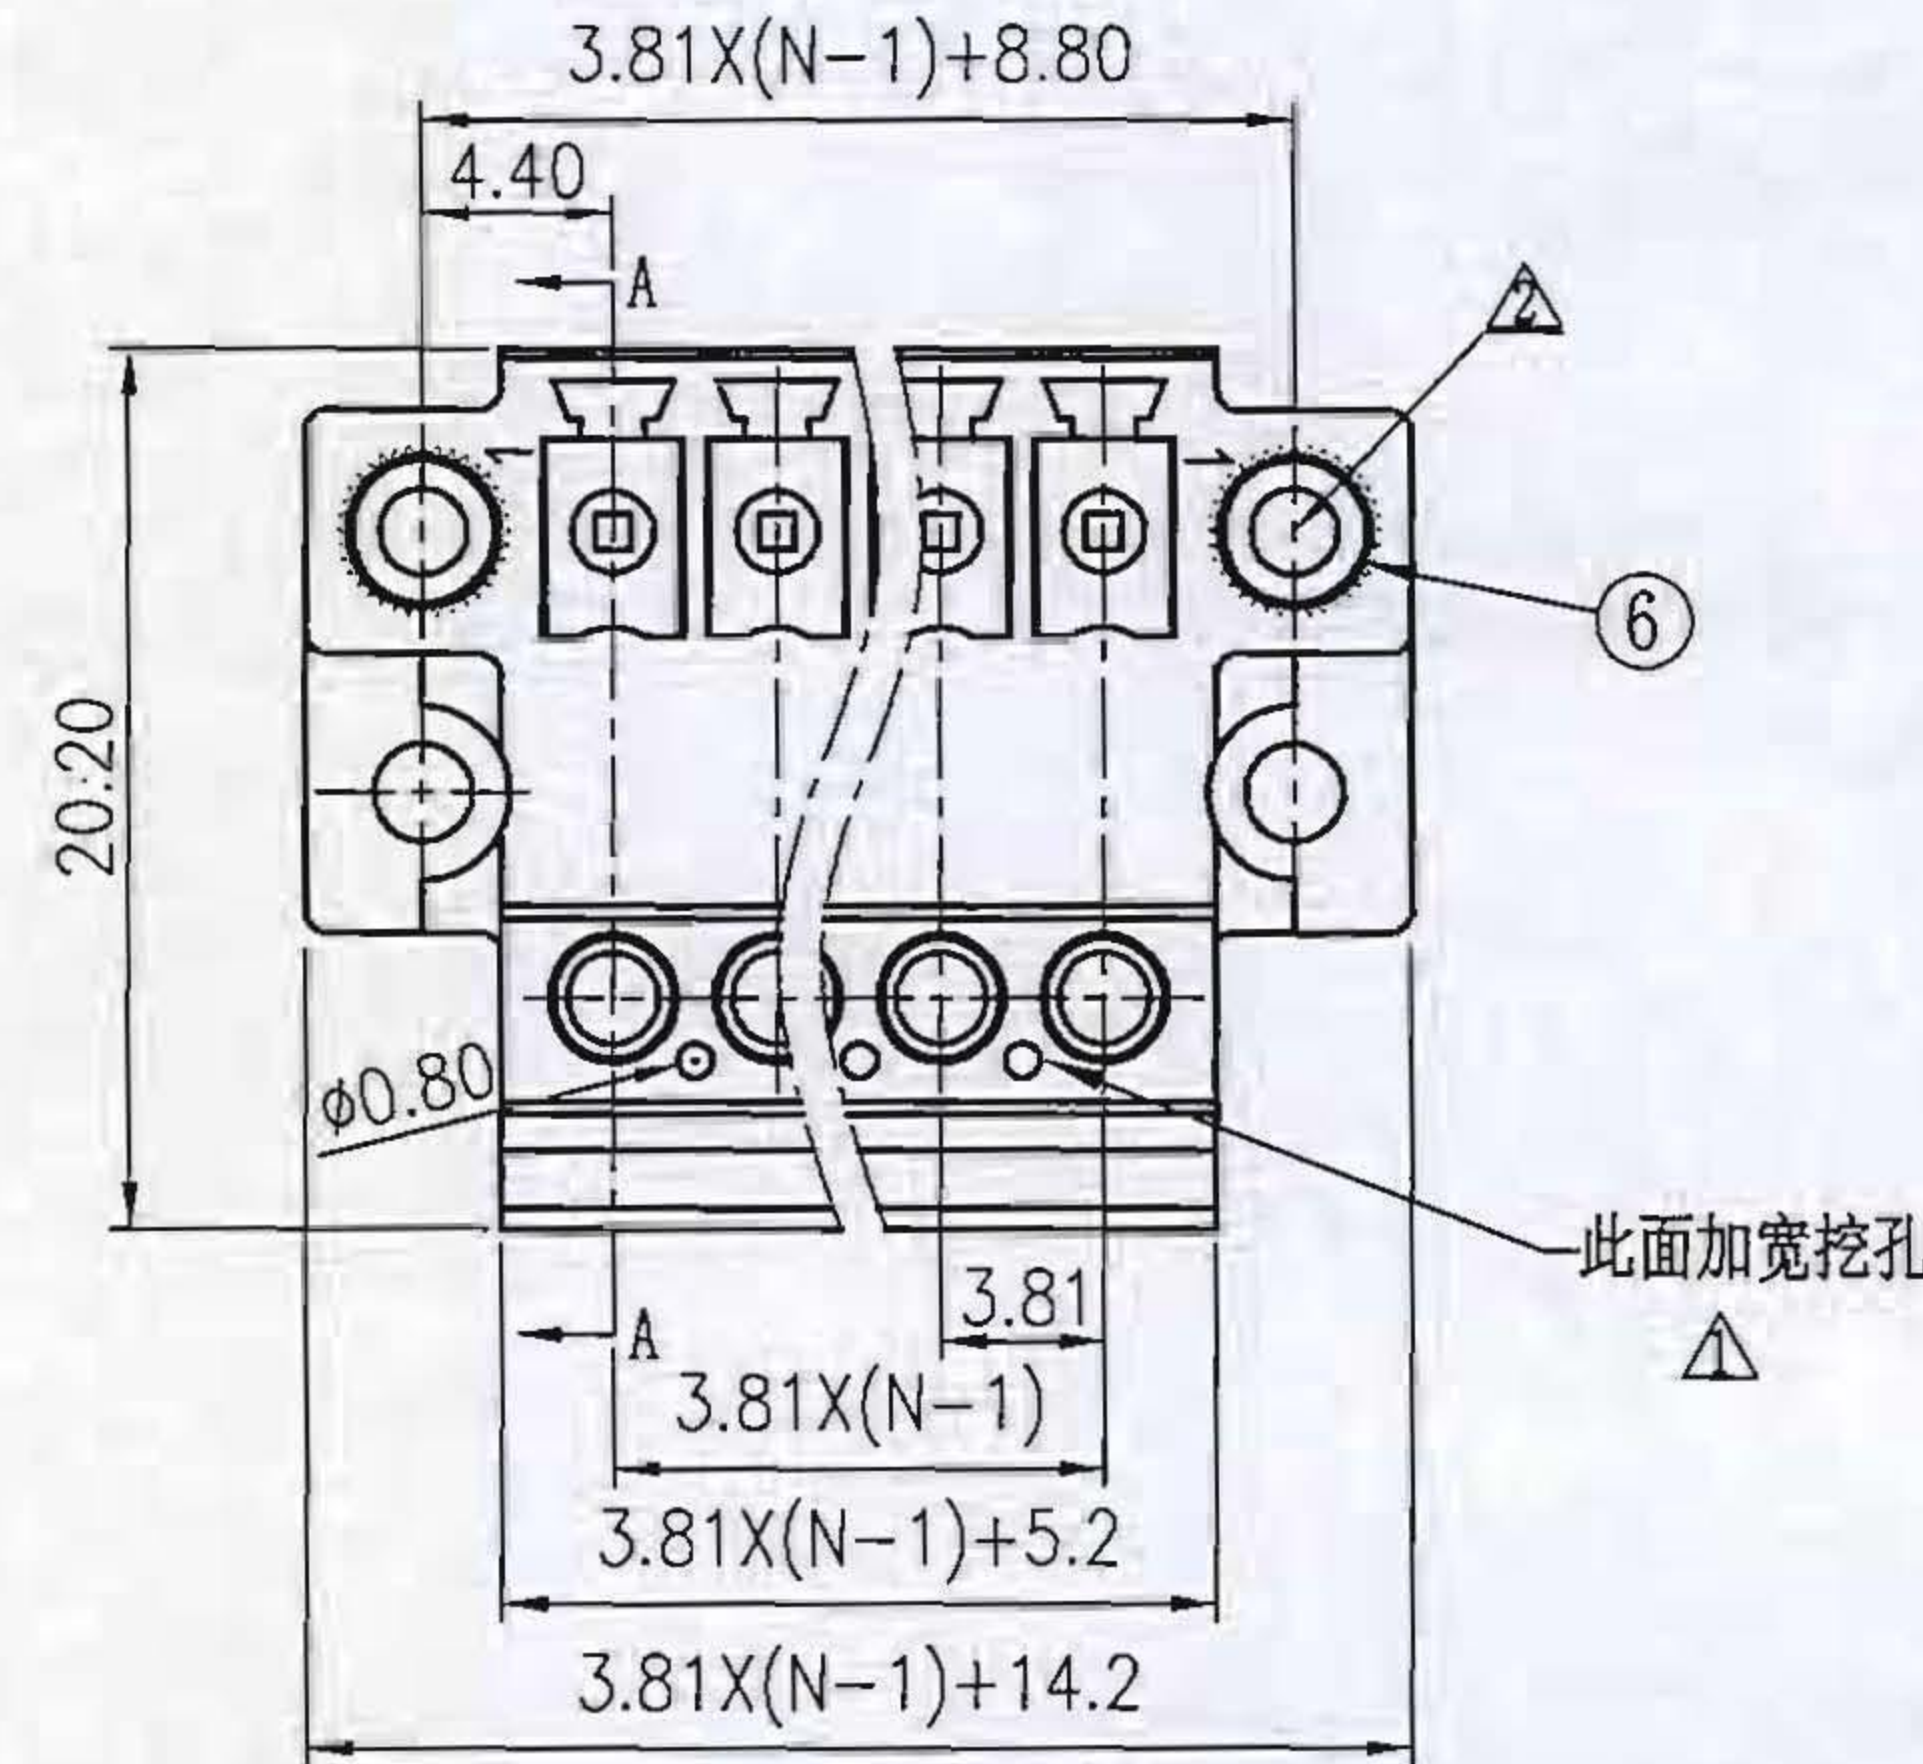


- Notes:
- pitch:3.81mm poles:2-16p
  - Rated voltage/current:UL1059 300V/8A  
IEC 250V/7A
  - Insulation Resistance:5000MΩ/DC1000V
  - Withstanding voltage: AC2000V/1Min
  - Wire range:30-14AWG 0.2-1.5mm<sup>2</sup>
  - Temp. Range:-40° C~+105° C
  - Max. Torque Value :2.04kgf.cm
  - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6	over 10	over 30	over 60	over 100	over 150	∩		
to	to 10	to 24	to 30	to 60	to 100	to 150	□		
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

文管中心用  
 2013.11.30  
 (仅限内部使用, 对外无效)

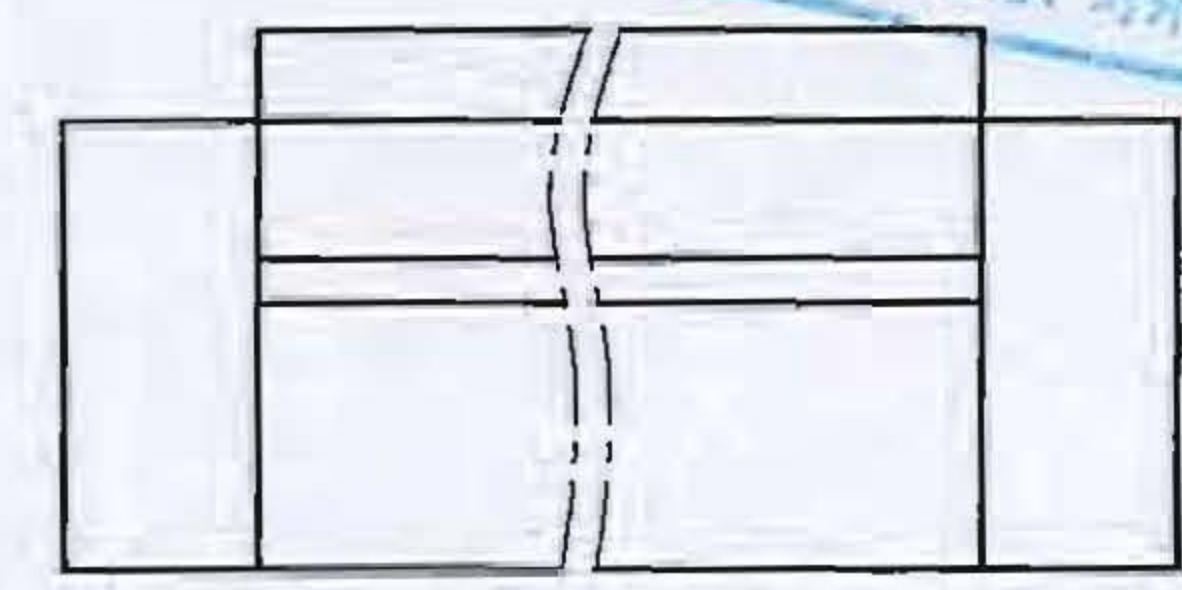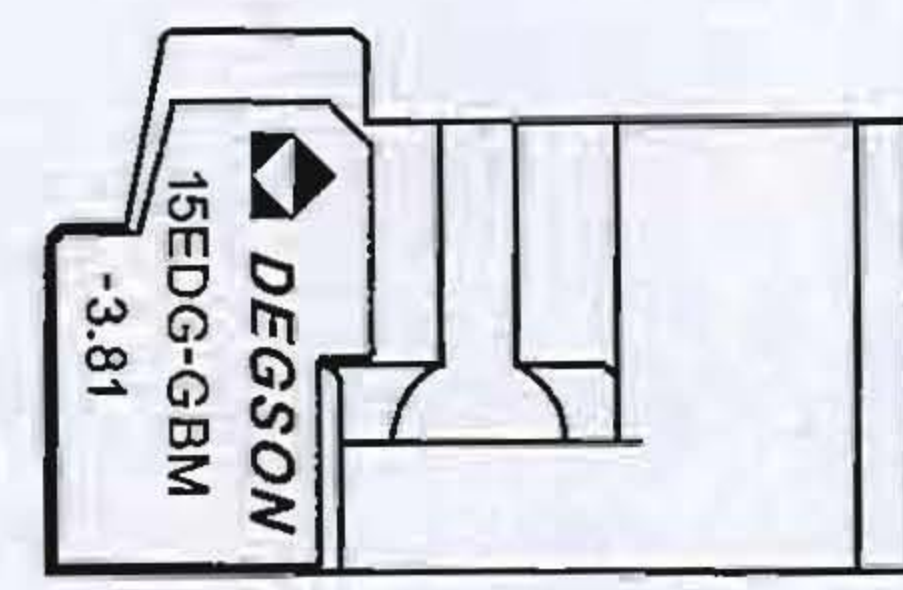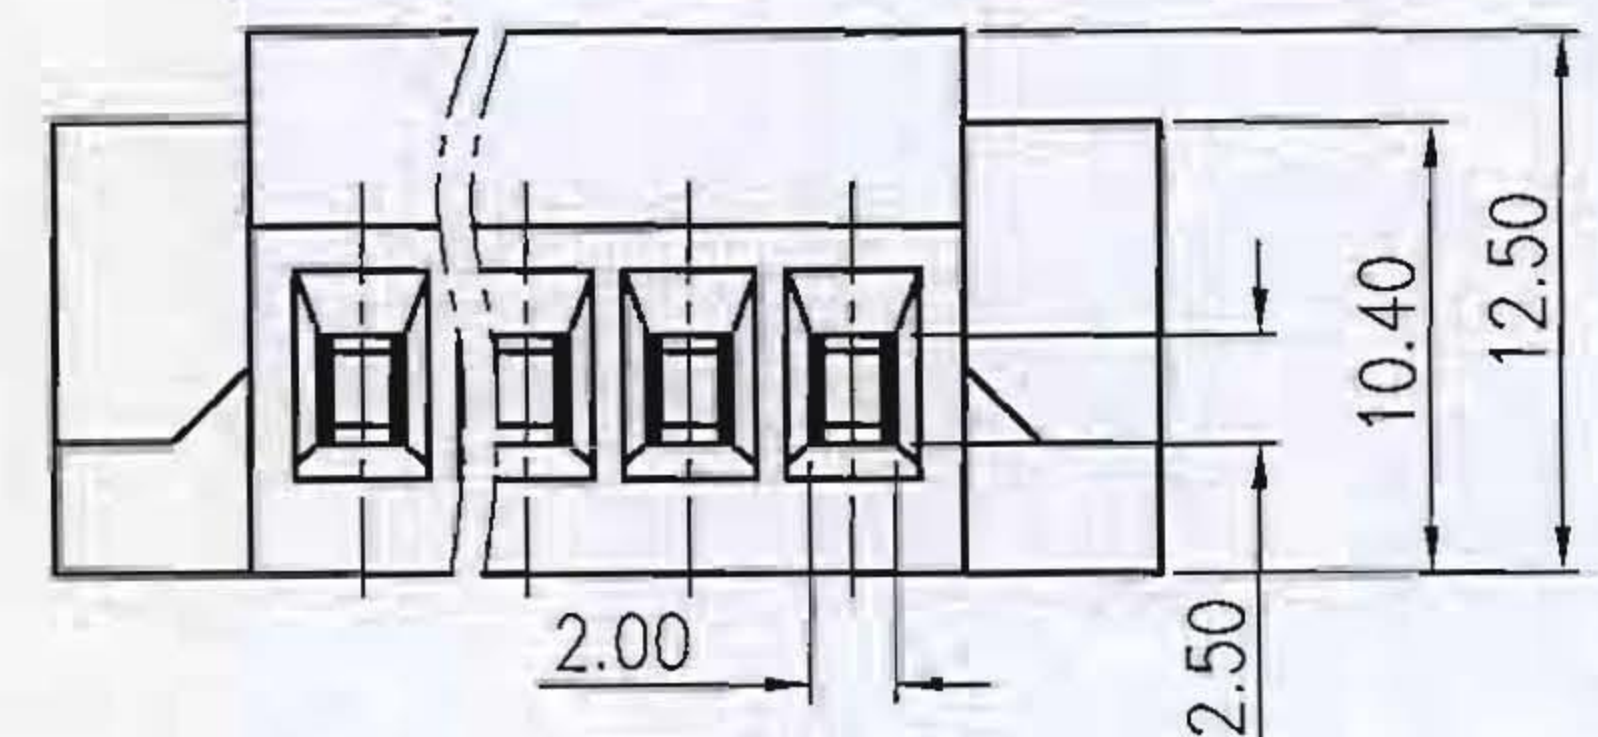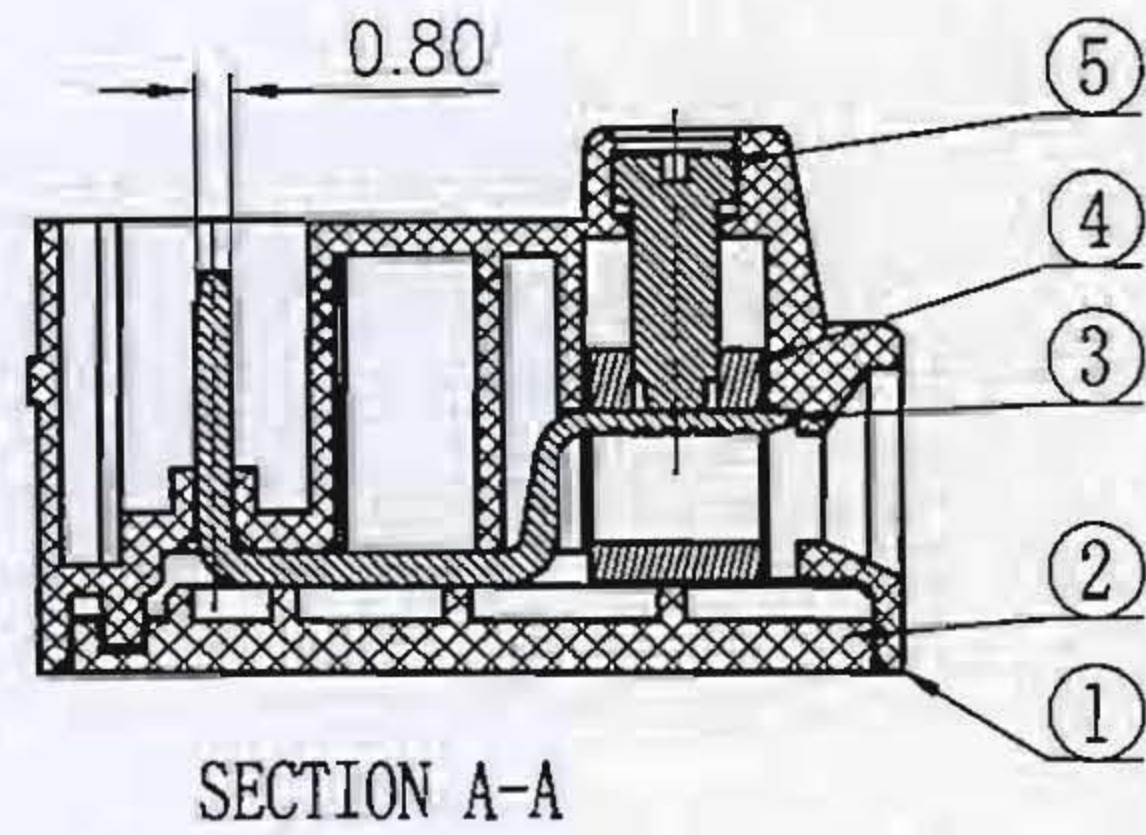

cover and housing  
contact by sonic  
welding

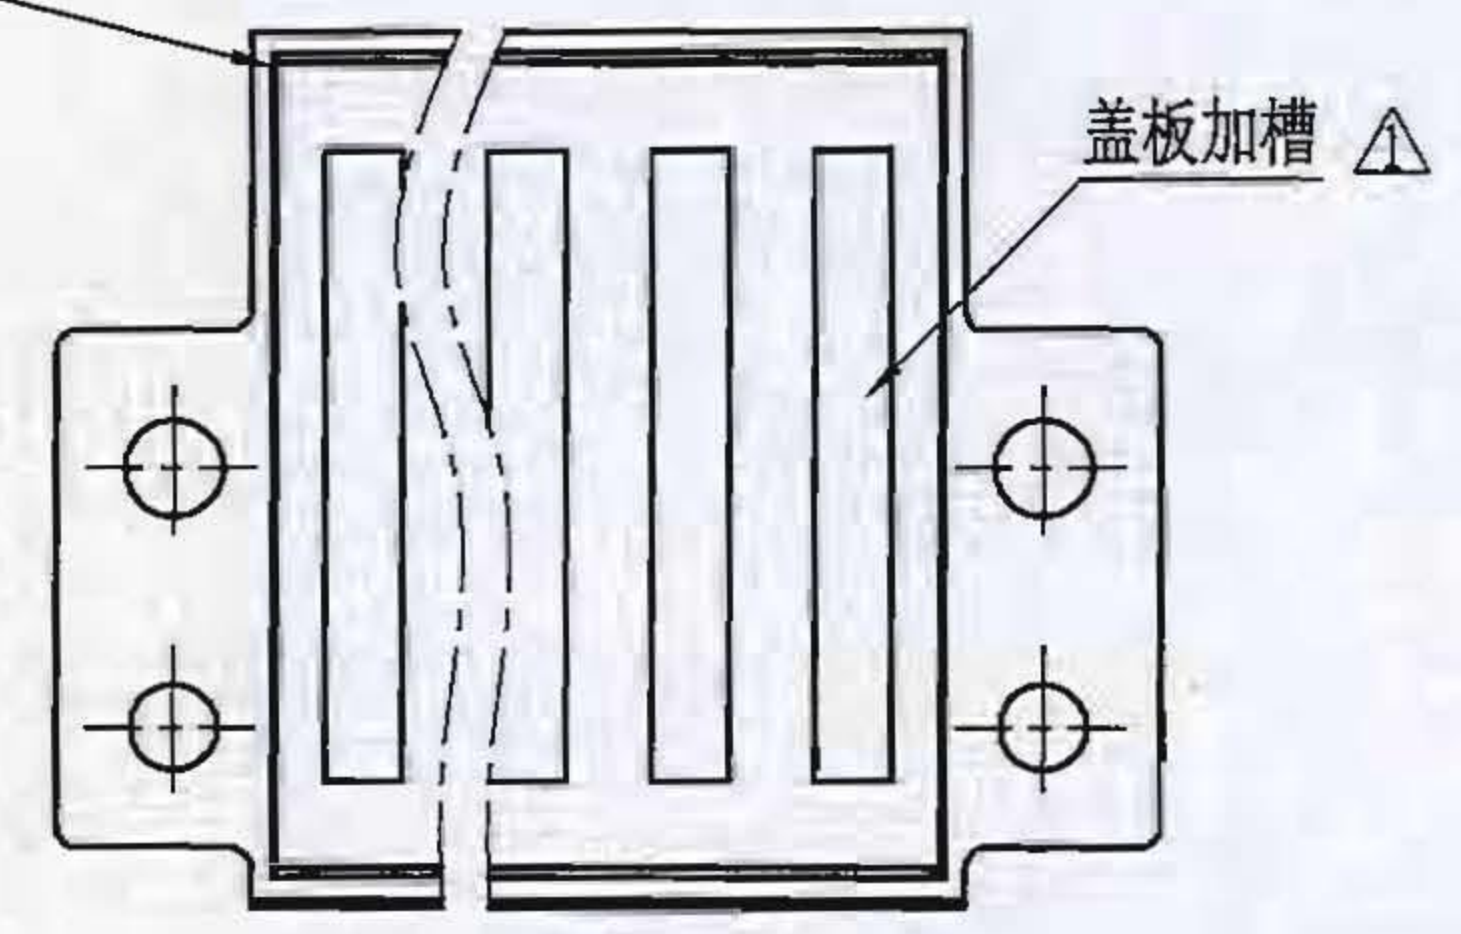

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
6	2EDG Cap	S000001040 (H) △	2	Brass	
5	15EDG-"-"Screws	S000001360 (H)	XX	Steel	
4	15EDG Brass Cage	X000000010 (H)	XX	Brass	Ni plated
3	15EDG-GBM-3.81 Pin	1178B00010 (H)	XX	Copper	Snce plated
2	15EDG-GBM-3.81 Cover	1178C0YXXA (H)	1	PA66	UL94V-0
1	15EDG-GBM-3.81 Housing	1178A0YXXC (H) △	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 10/04/'08	宁波高正电子有限公司 Ningbo Degson Electrical Co., Ltd
	TOLERANCES EXCEPT AS NOTED	CHKD Jdyz	DATE 2019.11.29	
	MFO	DATE		
	APPLY Lanco	DATE 2019.11.29		
NAME	15EDG-GBM-3.81-XXP-1Y-00A (H)			
MM .0 ±	±	MATERIAL :	DRAWING NO. 15EDG-GBM-3.81-E01	
.00 ±	±	G.E :	/PART NO. Series 15EDG-GBM-3.81	
.000 ±	±	FINISH :	SIZE A3	
ANGLES ± 1°		SCALE :	REV T2	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	05/06/11	
		SHEET 2	OF 2	