


未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

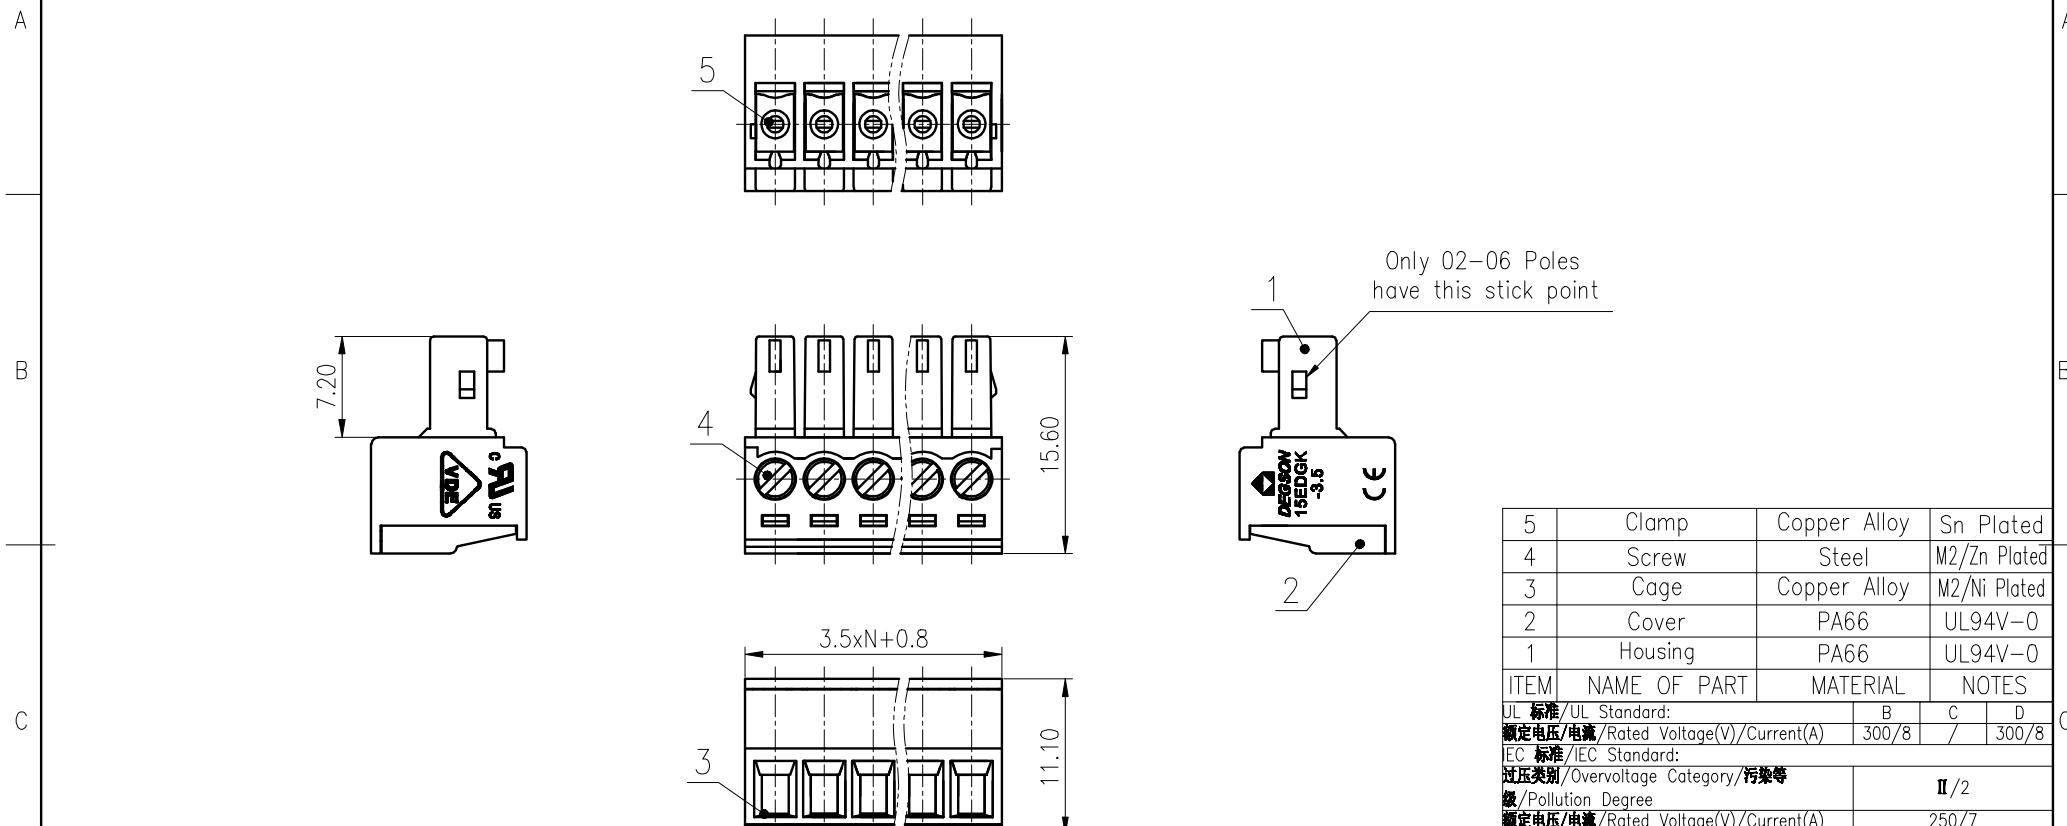

**Note:**  
The A&Z(H) in the name means: A(H) and Z(H)

- 15EDGK-3.5-XXP-1Y-00A&Z(H)
- 15EDGK-3.5-XXP-1Y-00A(H) or 15EDGK-3.5-XXP-1Y-00Z(H)
- 15EDGK-3.5-XXP-1Y-00AH or 15EDGK-3.5-XXP-1Y-00ZH
- 15EDGK-3.5 - series of terminals
- XXP - number of Poles (number of Pins)
- 1 - single-row
- Y - color of housing (4 - green color, 2 - blue color)
- 00A(H) or 00Z(H) (00AH or 00ZH) - no value

ITEM	NAME OF PART	MATERIAL	NOTES
5	Clamp	Copper Alloy	Sn Plated
4	Screw	Steel	M2/Zn Plated
3	Cage	Copper Alloy	M2/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电流/Rated Voltage(V)/Current(A)	250/7		
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	2.5		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.5~1.5/28~16		
间距/Pitch(mm)/线数范围/Poles	3.50/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /	SURFACE: /		
MAT NO.: /	<b>宁波高松电子有限公司</b> <b>NINGBO DEGSON ELECTRICAL CO., LTD</b>		
STATUS: /			
APPD: LanChH 2020.05.30	NAME: <b>15EDGK-3.5-XXP-1Y-00A&amp;Z(H)</b>		
CHKD: YuJZh 2020.05.30	DRAWING NO.: 10002218		
DRFT: BaYH 2020.05.30	REV		TO
SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE