

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△	16-0383	Design Modify	Xin	10/10/16"

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 8A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M2 , 1.77Lb.in
4. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	450V
Rate current(A)	7A

2. Torque value : M2 , 0.2N·m
3. Wire range : 0.5~1.5mm<sup>2</sup>

NOTES2:






1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.08mm, Poles : N=02~12P
3. Stripping length : 6~7mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch Range In mm	Nominal Dimension Range In mm			-	0	0
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30
						±2'

6. RoHS Compliance

15EDGK - 5.08 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

宁波专用  
 2017.02.07  
 内部使用, 对外无效

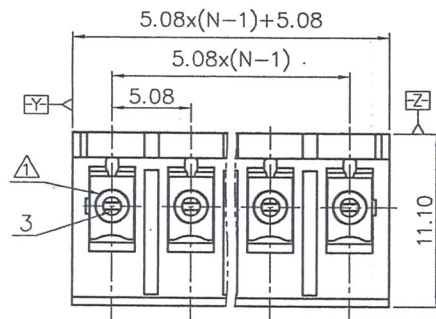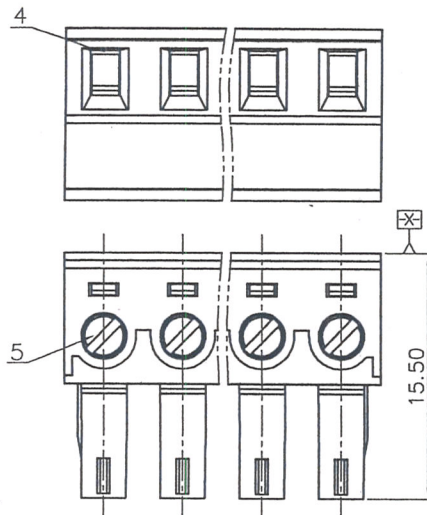

(Approval mark can be printed on left and right end both)

ITEM	NAME OF PART	MATERIAL	NOTES
5	Screw	Steel	M2/Zn Plated
4	Cage	Copper alloy	M2/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: Aaron 12/24/16	NAME: 15EDGK-5.08-XXP-1Y-00A(H)		
CHKD: hzp/16	TITLE: CUSTOMER DRAWING		
DRFT: HZD 08/20/15"	REV: T1	SHEET 1/1	
DRAWING NO.: 15EDGK-5.08-C01		SCALE: 1:1	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	