
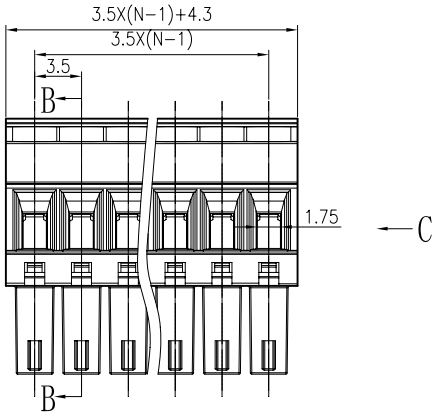




Notes:

1. Pitch:3.5mm , Poles:2-24P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:28~16AWG, 0.5-1.5mm²
7. Max. Torque Value:M2, 2.04kgf.cm(1.77Lb.in)
8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Pitch range in mm		Nominal dimension range in mm					—
to	over	to	to	to	to	to	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

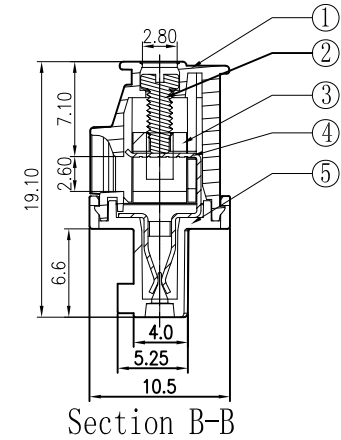

C向

5	15EDGKA/B-3.5-100A-Cover	1033C0YXXE(H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020(H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010(H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360(H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/B-3.5-100A-Housing	1033A0YXXE(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)		DFTO Apply	DATE 04/11/09*	DEGSN® 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD NAME 15EDGKA-3.5-XXP-1Y-100A(H) DRAWING NO. 15EDGKA-3.5-E100 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
	MM .0 ±		MFO	DATE	
	.00 ±		APPVL	DATE	
	.000 ±				
	ANGLES ± 1°		MATERIAL :		
	G.E :				
	FINISH :				
	SCALE : 1:1				
	THIRD ANGLE PROJECTION				