
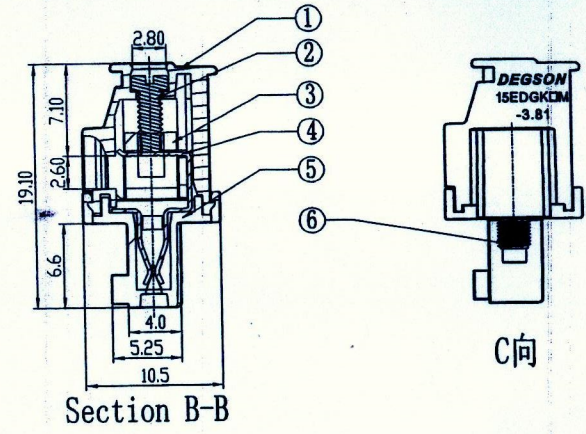


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE

Notes:

1. Pitch: 3.81mm , Poles: 2-22P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~16AWG, 0.5-1.5mm²
7. Max. Torque Value: M2, 2.04kgf. cm (1.77Lb. in)
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1

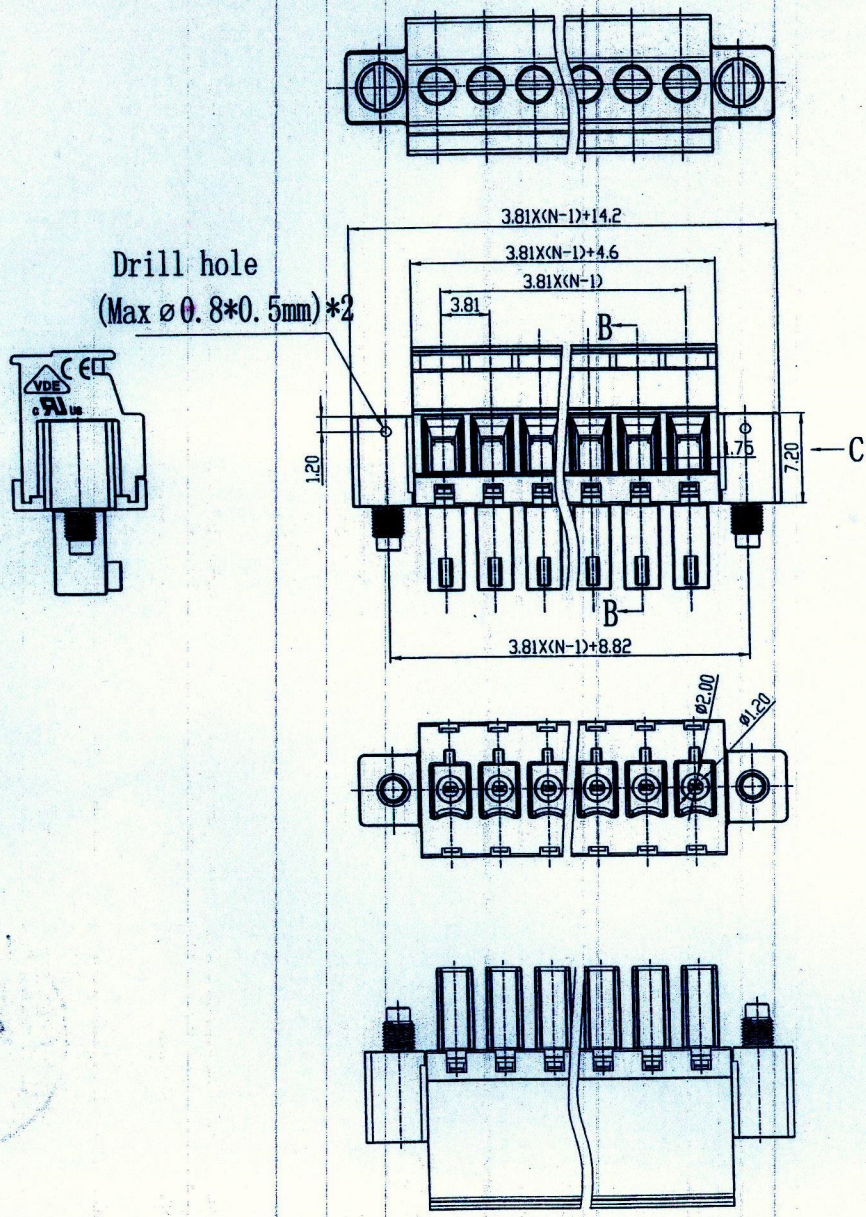

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
6	2EDG Screw-M2.5	S000001370 (H)	2	Steel	Cr ³⁺ Zn
5	15EDGKA/B-3.81-100A-Cover	1041COYXXE (H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/BM-3.81-100A-Housing	1047AOYXXE (H)	1	PA66	UL94V-0

MM (INCH) TOLERANCES EXCEPT AS NOTED MM 0 ± .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION	DFTD Apple CHKD MXG MFD APPVL Huang FINISH SCALE: 1:1	DATE 04/11/09 DATE 07/15/10 DATE 07/16/10 G.E : Series 15EDGKAM-3.81 DRAWING NO. 15EDGKAM-3.81-E100 /PART NO. DO NOT SCALE DRAWING	宁波高正电子有限公司 NINGBO DEGSON ELECTRIC CO., LTD NAME 15EDGKAM-3.81-XXP-1Y-100A (H) SIZE A3 REV TO 09/10/10 SHEET 1 OF 1
---	--	--	--

