


Constant Current Driver

Model: LC50W200-350

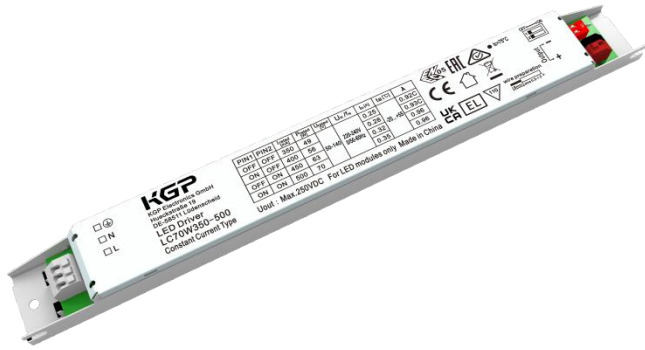

| Model | Output Current | Input Current | Input Power | Output Power Range | PF | Efficiency | Output Voltage | No load Voltage |
|--------------|----------------|---------------|-------------|--------------------|------|------------|----------------|-----------------|
| LC50W200-350 | 200mA | 0.18A | 38.0W | 10.0-34.0W | 0.90 | 90% | 50-170V | 250V |
| | 250mA | 0.22A | 47.0W | 12.5-42.5W | 0.92 | 91% | | |
| | 300mA | 0.26A | 56.0W | 15.0-51.0W | 0.95 | 92% | | |
| | 350mA | 0.26A | 55.0W | 17.5-50.4W | 0.95 | 92% | 50-144V | |

* Test result @230V, 50Hz, Full Load.

1.Parameters

| category | Item | Technical Norm |
|----------|---------------------------|--------------------------------------|
| Features | Output Type | Constant Current |
| | IP Grade | IP20 |
| | Insulation Class | Class I |
| Input | Rated Input Voltage | 220-240V |
| | Range of AC Input Voltage | 198-264VAC |
| | Range of DC Input Voltage | 176-280VDC |
| | Frequency | 0/50-60Hz |
| | Power Factor | ≥0.95(230VAC, full Load, see graphs) |
| | THD | ≤20%(230VAC, full Load, see graphs) |
| | No-load Power Consumption | ≤0.5W @230VAC |
| Output | Current Accuracy | ±5% |
| | Max. Output Voltage | 250V |
| | Started Delay Time | ≤0.5S (230VAC, full load) |
| | Current Ripple(< 120 Hz) | ±5% (Imax-Imin) / (Imax+Imin) |
| | PstLM | ≤1 |
| | SVM | ≤0.4 |

| | | |
|---|------------------------------|---|
| | Emergency output coefficient | 1 |
| Protection | Short Circuit Protection | Auto Recovery |
| | Overload Protection | Auto Recovery |
| | No-load Protection | Auto Recovery |
| | Insulation voltage | O/P to PE , 1.5KVac/1min I/P to PE , 1.5KVac/1min |
| | Insulation resistance | >100M ohm @ 500VDC |
| | Leakage current | I/P to O/P < 700μA |
| Environment | Ta/Operation Temperature | -20...+55°C |
| | Ts/Storage Temperature | -30....+85°C |
| | Tc/Enclosure Temperature | 75°C |
| | Humidity | 10%....90%RH |
| | Atmosphere | 86-108KPa |
| Construction | Connection Method | Push-in Terminal |
| | Installation | Build-in |
| | PRI Wire preparation | 0.5-1.5□ |
| | SEC Wire preparation | 0.5-1.5□ |
| | Dimension | 230*30*21mm (L*W*H) |
| Standards | Certification | CE、ENEC、EAC、UKCA、SAA |
| | Safety Standards | EN61347-1:2015 EN61347-2-13:2014/A1:2017 EN62384:2006/A1:2009 EN62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1 |
| | EMC Standards | EN IEC 55015:2019 EN61547:2009 EN IEC 61000-3-2:2019 EN 61000-3-3:2013/A1:2019 |
| | Performance | EN62384 |
| | Surge | L-N:1KV; L/N-PE:2KV; |
| | RoHS | Complied to 2011/65/EU |
| Others | Life Time | 50000h Tc=75°C, F.R. <10% |
| | | 75000h Tc=70°C, F.R. <10% |
| | | 100000h Tc=65°C, F.R. <10% |
| | Warranty | 5years |
| Remark: 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature. 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again. | | |

2. Output Current Setting

| Output Current | Dial 1 | Dial 2 |
|----------------|--------|--------|
| 350mA | ON | ON |
| 300mA | OFF | ON |
| 250mA | ON | OFF |
| 200mA | OFF | OFF |

3. Connected quantities of different current Breaker

| TYPE | LC50W200-350 Connected quantities of different current Breaker | | | | | | Input Voltage | Inrush Current | Time |
|--------|--|--------------------|--------------------|--------------------|------------------|------------------|---------------|----------------|-------|
| | current (A) | 10 | 13 | 16 | 20 | 25 | | | |
| | Installation wire diameter | 1.5mm ² | 2.5mm ² | 2.5mm ² | 4mm ² | 4mm ² | | | |
| TYPE B | | 24 | 31 | 38 | 48 | 60 | @230VAC | 25 | 250us |
| TYPE C | | 38 | 50 | 61 | 77 | 96 | | | |
| TYPE D | | 61 | 80 | 98 | 123 | 154 | | | |

4. Label

⊕
 N
 L

KGP
 KGP Electronics GmbH
 Hueckstraße 19
 DE-58511 Lüdenscheid
LED Driver
LC50W200-350
 Constant Current Type

| PIN1 | PIN2 | I _{rated} [mA] | P _{rated} [W] | U _{rated} [V] | U _N / f _N | I _N [A] | t _a [°C] | λ |
|------|------|-------------------------|------------------------|------------------------|---------------------------------|--------------------|---------------------|-------|
| OFF | OFF | 200 | 34 | 50-170 | 220-240V 0/50-60Hz | 0.18 | -20...+55 | 0.90C |
| ON | OFF | 250 | 42.5 | | | 0.22 | | 0.92C |
| OFF | ON | 300 | 51 | 50-144 | | 0.26 | | 0.95 |
| ON | ON | 350 | 50.4 | | | 0.26 | | |

U_{out} : Max.250VDC For LED modules only Made in China

tc=75°C

OFF — ON

Output


1 -

2 +


wire preparation

1.6mm wire 0.6-1.6

5. Lifetime curve

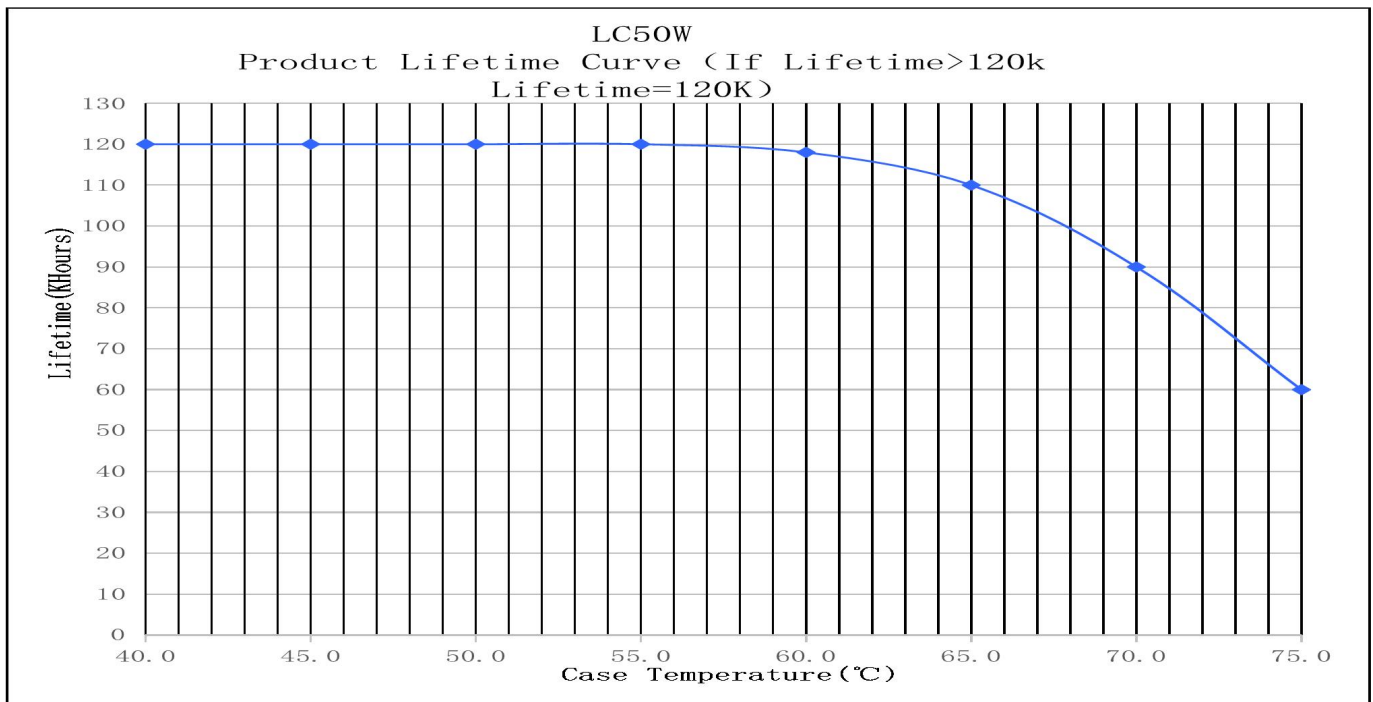


6.Dimension (Unit: mm)

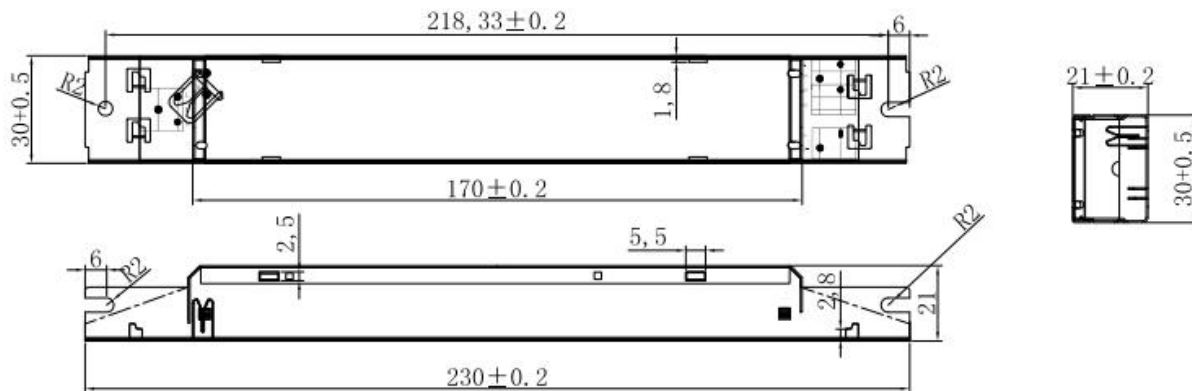

7.Packing information

| Carton L*W*H(mm) | Pcs/Carton | Net weight/ Pcs(kg) | Net weight/ Carton(kg) | Gross weight / Carton(kg) |
|---------------------|------------|---------------------|---------------------------|------------------------------|
| 380*250*155MM | 60PCS | T.B.D | T.B.D | T.B.D |

8.Wiring Diagram

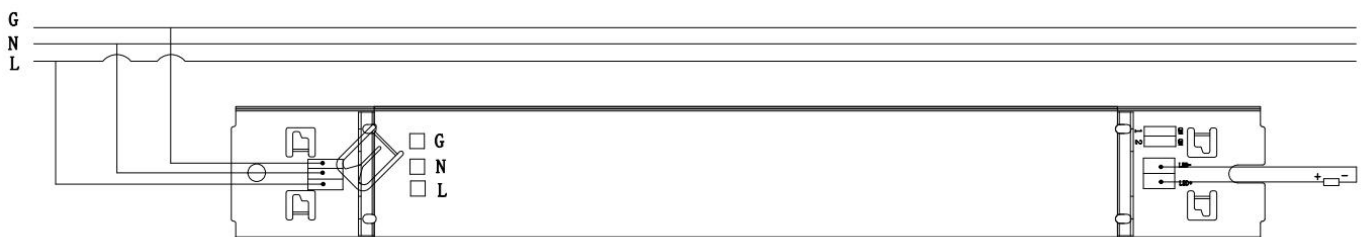

9.Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.



LC50W200-350

10. REVISION HISTORY

| DATE | REV. | REMARK |
|------------|------|-------------------|
| 2022-10-26 | V1.0 | Initial release. |
| 2022-12-14 | V1.1 | Update the label. |
| | | |
| | | |
| | | |