


Notes:

1. Pitch: 3.5mm , Poles: 2-22P
2. Rated voltage/current: UL 300V/8A  
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 28~16AWG, 0.5-1.5mm<sup>2</sup>
7. Max. Torque Value: M2, 2.04kgf.cm (1.77Lb. in)
8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE

Pitch range in mm		Nominal dimension range in mm					
to	over	to	over	to	over	to	over
6	10	10	24	30	60	100	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1

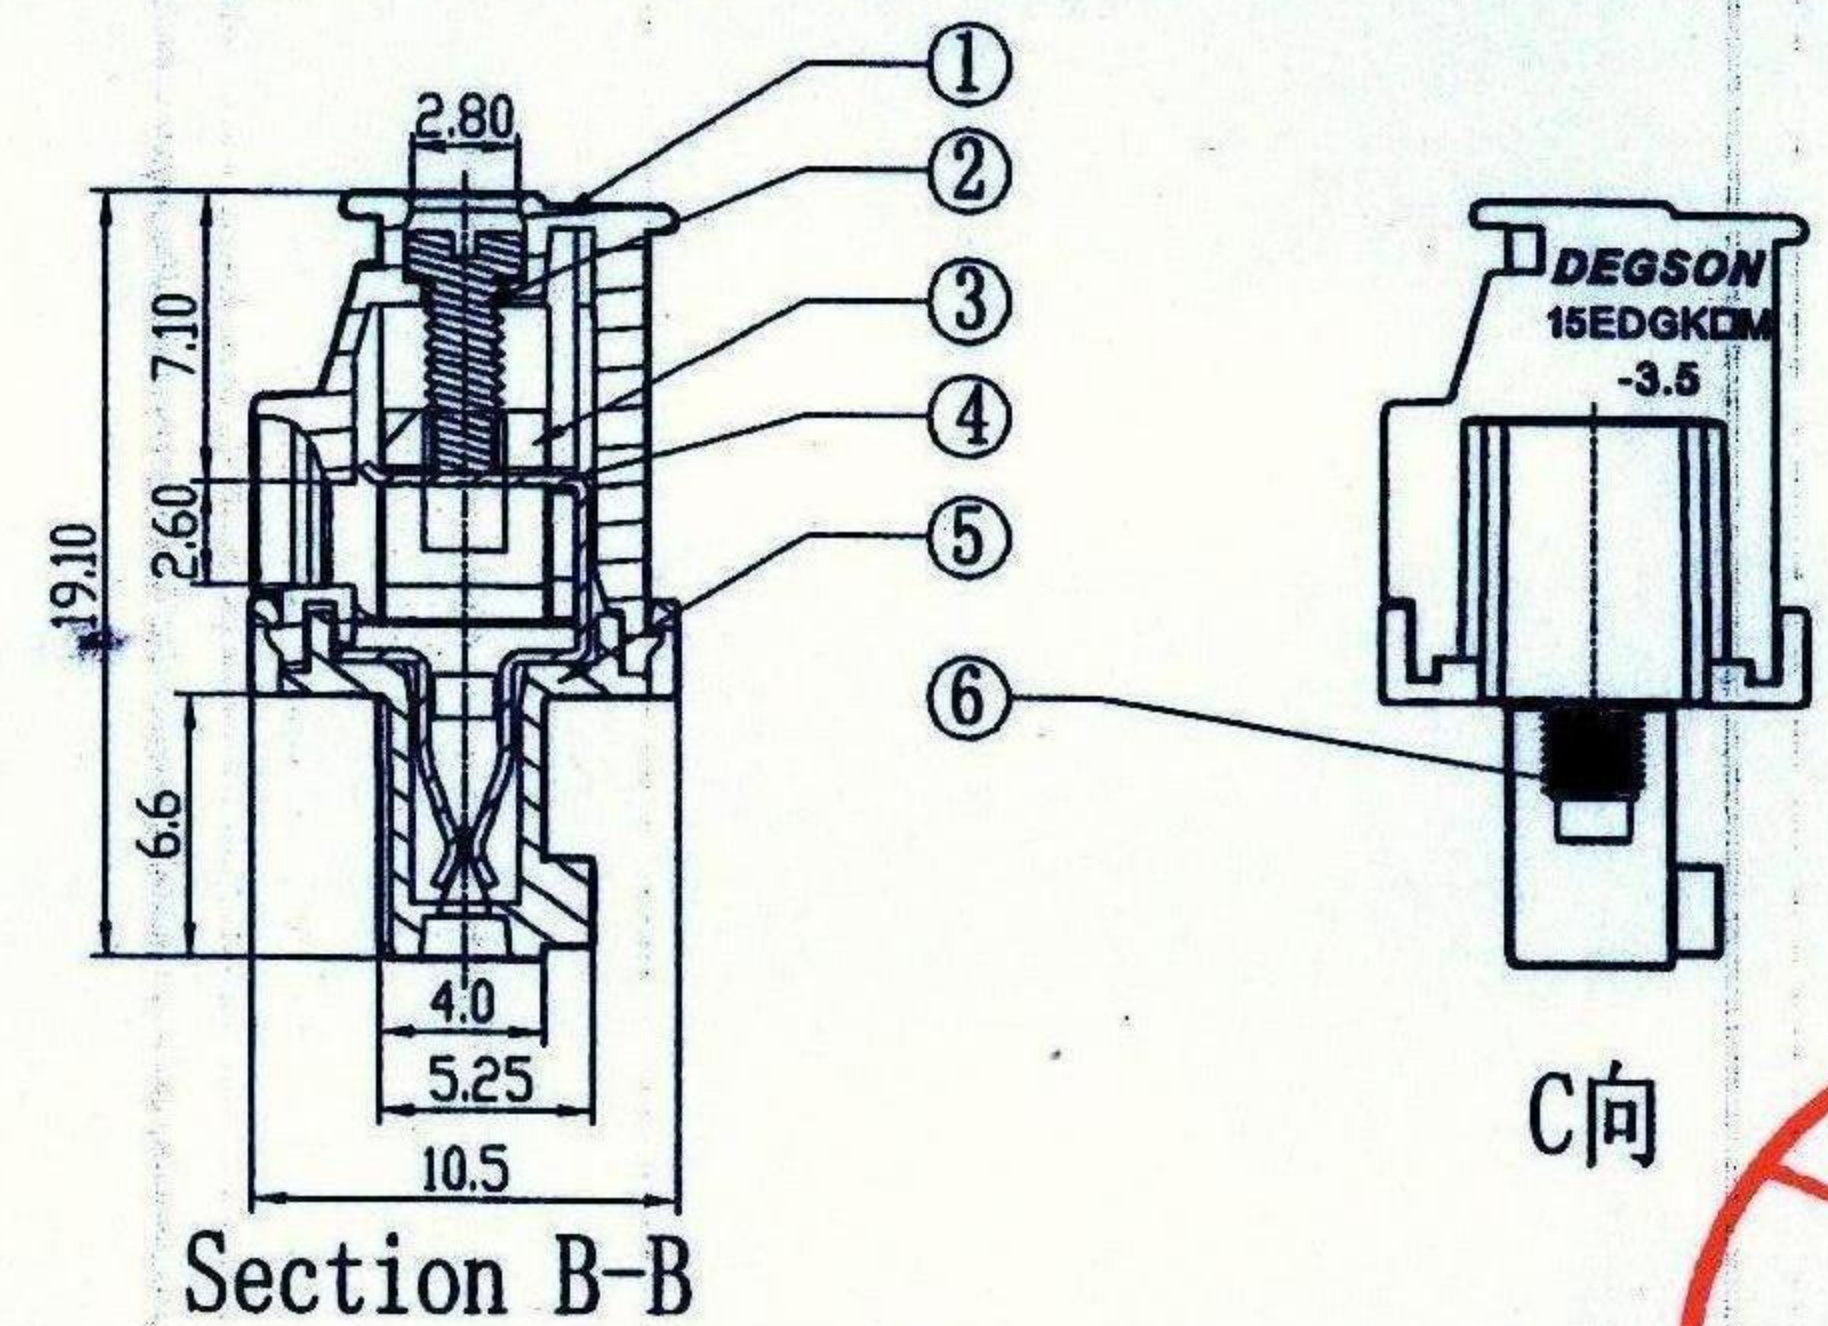

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
6	2EDG Screw-M2.5	S000001370 (H)	2	Steel	Cr <sup>3+</sup> Zn
5	15EDGKA/B-3.5-100A-Cover	1033COYXXE (H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr <sup>3+</sup> Zn
1	15EDGKA/BM-3.5-100A-Housing	1034A0YXXE (H)	1	PA66	UL94V-0

DETACHED LISTS TOLERANCES EXCEPT AS NOTED MM ± .0 ± .00 ± .000 ANGLES ± 1° THIRD ANGLE PROJECTION	DFTD Apply DATE 04/11/09* CHK'D HNS DATE 09/11/10* MFO DATE APPVL Hany DATE 09/16/10* MATERIAL : GE : FINISH : SCALE : 1:1	DEGSON® 宁波高正电子有限公司 Ningbo Degson Electrical Co., Ltd. NAME 15EDGKBM-3.5-XXP-1Y-100A (H) DRAWING NO. 15EDGKBM-3.5-E100 7/PART NO. Series 15EDGKBM-3.5 DO NOT SCALE DRAWING	SIZE A3 REV TO 09/10/10* SHEET OF 1
---	---	---	---