



Model	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Current	Output Voltage	No load Voltage
RC36W800-850	0.20A	41W	12-33.6W	0.92	87%	800mA	15-42V	59V
	0.22A	43W	12.75-35.7W	0.92	88%	850mA		
RC42W900-1000	0.23A	45.5W	13.5-37.8W	0.95	88%	900mA		
	0.25A	50W	15-42W	0.95	89%	1000mA		

* Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Output Features	Isolation
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Frequency	50/60Hz
	Input Current	≤0.25A
	Input Power	≤50W
	Power Factor	≥0.9(230VAC, full load)
	THD	≤15% (230VAC, full load)
	No-load Power Consumption	≤0.5W
Output	Current Accuracy	±5%
	Max. Output Power	42W
	Started Delay Time	≤0.5S (230VAC, full load)
	LF Current Ripple (< 120 Hz)	±5% (Imax-Imin) / (Imax+Imin)
	PstLM	≤1
	SVM	≤0.4
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	over-temperature protection	Auto Recovery

	Insulation voltage	I/P to O/P , 3KVac/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	< 250μA, I/P to O/P
Environment	Ta/Operation Temperature	-20....+60°C
	Ts/Storage Temperature	-30....+85°C
	Tc/Enclosure Temperature	90°C
	Humidity	10%....90%RH
	Atmospheric pressure	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Build-in
	PRI Wire preparation	0.5-1.5□
	SEC Wire preparation	0.5-1.5□
	Dimension	Φ64*25mm (R*H)
Standards	Certification	CE
	Safety Standards	EN61347-1:2015,EN61347-2-13:2014/A1:2017, AS 61347.2.13:2018,AS/NZS 61347.1:2016 Inc A1
	EMC Standards	EN IEC 55015:2019EN, IEC 55015:2019/A11:2019 ,EN IEC 61000-3-2:2019,EN 61000-3-3:2013/A1: 2019,EN61547:200
	Performance	EN62384
	Surge	L-N/2KV
Others	RoHS	complied to 2011/65/EU
	Life Time	50000h @Ta/ Tc
	Warranty	5years , F.R. < 10000ppm

Remark:

- 1.All Parameters, if not specified, are measured at 230VAC/50Hz , At full load and 25°C ambient temperature.
- 2.LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.

2. Output Current Setting RC42W900-1000

Output Current	Dial 1
1000mA	ON
900mA	1

RC36W800-850


Output Current	Dial 1
850mA	ON
800mA	1

3. Connected quantities of different current Breaker


TYPE	RC36W800-850 Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B	20	26	32	40	50	@230VAC	30	400us	
TYPE C	32	42	51	64	80				
TYPE D	51	67	82	102	128				

TYPE	RC42W900-1000 Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B	19	24	30	37	47	@230VAC	32.2	564us	
TYPE C	30	39	48	60	75				
TYPE D	48	62	76	95	119				


4. Label

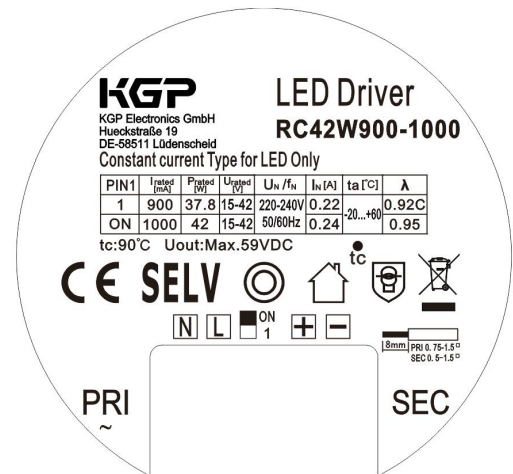

5. Lifetime curve

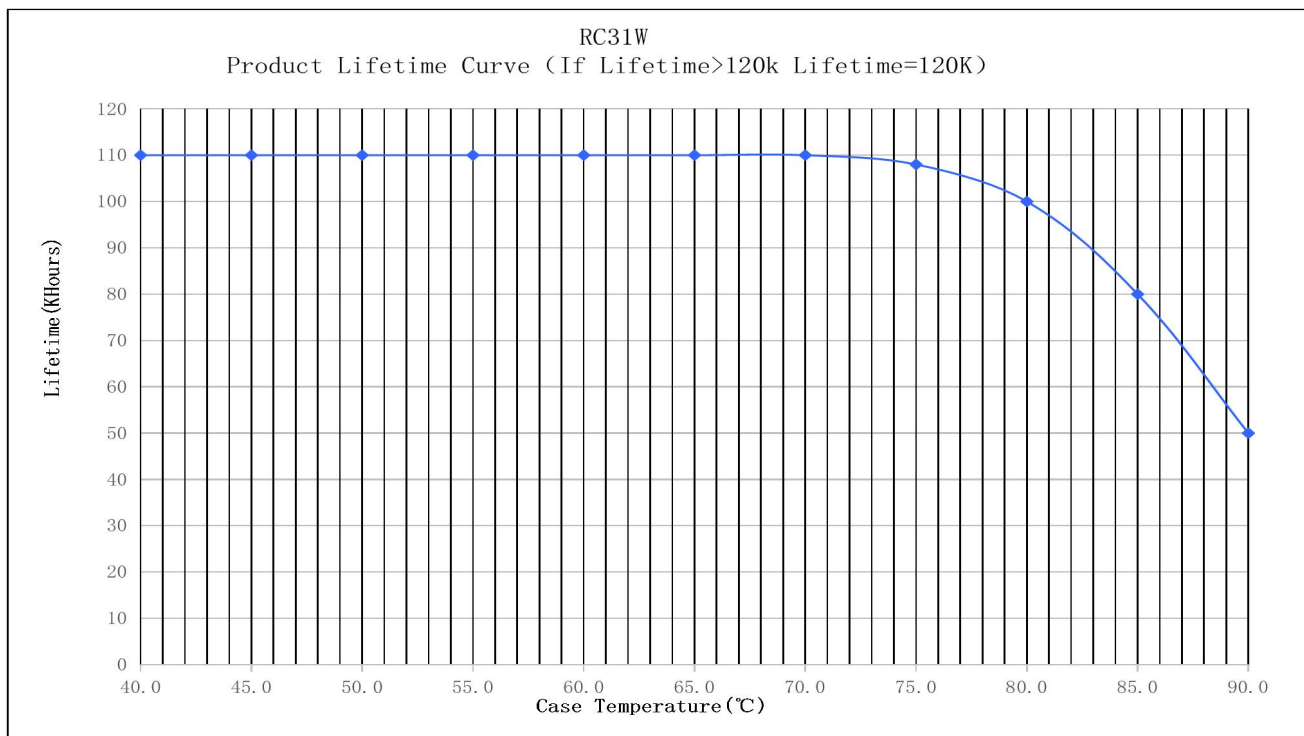


6. Dimension (Unit: mm)

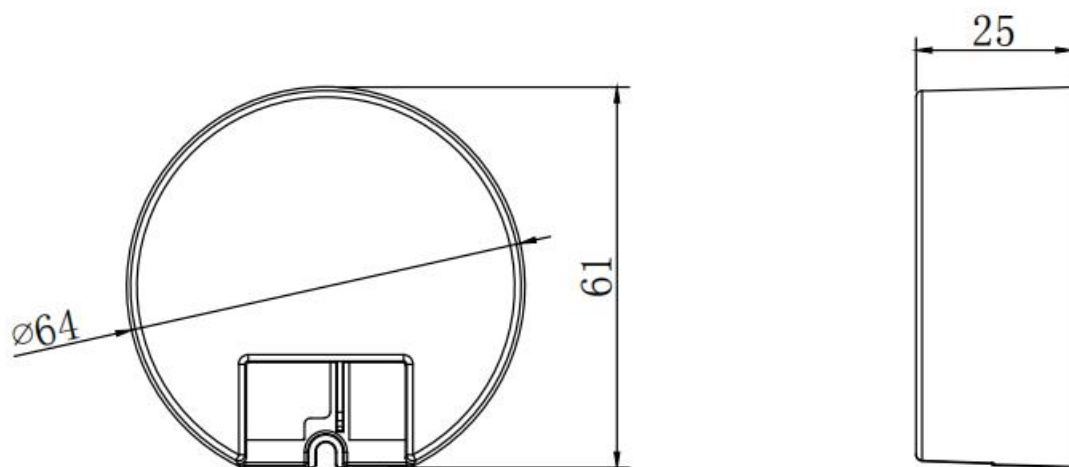

7. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Netweight/ Carton(kg)	Gross weight/ Carton(kg)
410*270*160	90	0.049	4.41	5.41

8. Wiring Diagram

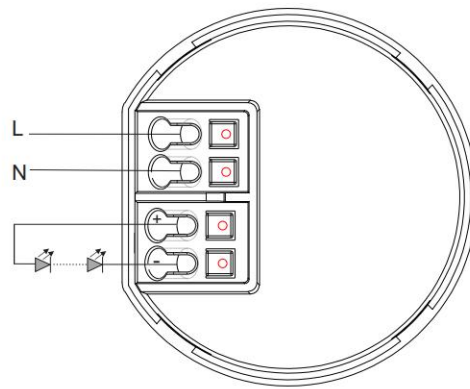

9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)

10. REVISION HISTORY

DATE	VER	REMARK
2023-06-03	V1.0	Initial release.