

Description

S6-1K6Y428 series is specially designed for sports lighting and industrial lighting applications. It is constant current LED driver that operates from 220-480Vac with DMX&DALI-2 programming dimming function. This Rectangle integrated structure enables it to have a better heat dissipation cooler, significantly improving reliability and extending product life. To ensure trouble free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature. The better thermal design and high efficiency enable the driver to operate with high reliability, and extending product lifetime. Overall protection is provided against lightning surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.



Product Features

- Input voltage range: 198~528Vac;
- Constant current design;
- DMX-RDM control optional, Support RDM control mode & controller address setting;
- Support flashing function with maximum of 6 flashes per second;
- Non-Isolated Class I Driver;
- Efficiency up to 97%;
- 4*400W channels independently output;
- DMX512&DALI-2 DT8 control interface;
- Dim-to-off; No glow after Dim-to-off;
- Max remote distance 300 meters;
- Surge protection: 10KV line-line, 10KV line-earth @2Ω;
- Multiple protection: SCP, OVP, OTP;
- IP66, IK08 design for indoor and outdoor applications;
- 5 years warranty.

Application

Stadium lighting
 Area and flood lighting
 High-bay lighting

Models

Model Number	Input Voltage Range(Vac)	Channel	Max Output Power(W)	Output Voltage Range(Vdc)	Full Power Output Current Range(A)	Default Current(A)	Eff.(Typ.)	PF(Typ.)	THD(Typ.)
S6-1K6Y428	198-528	1	400W	132-350	1.15~3.00	2.8	97%	0.95	10%
		2	400W	165-428	0.94~2.20	2.1			
		3	400W	165-428	0.94~2.20	2.1			
		4	400W	165-428	0.94~2.20	2.1			

NOTES:

[1]. Y=R means DMX-RDM. Y=D means DALI-2.

[2]. All specifications are measured at 25°C ambient temperature, input voltage 400Vac, and the typical value tested at full load, if no specific note.

Input Specifications

Parameter	Min	Typ.	Max	Notes
Input Voltage Typ.	220Vac	230/277/347/400Vac	480Vac	
Input Voltage Range	198Vac	-	528Vac	Refer to Output Power vs. Input Voltage curve.
Input Frequency AC	47Hz	50/60Hz	63Hz	
Max Input Current	-	-	8.0A	220Vac&Full Load.
Max Input Power	-	-	1720W	220Vac&Full Load.
Protective Conductor Current	-	-	3.5mA	220~480Vac/60Hz; IEC 60598-1;
Inrush Current	-	0.8A ² S	1.0 A ² S	480Vac, full load, 50%~50% peak pulse duration.
Inrush Current	-	30A	35A	480Vac&Full Load, Cold Start.
Power Factor(PF)	0.97	0.99	-	220-277Vac, 50/60Hz, 100% Load.
Power Factor(PF)	0.93	0.95	-	347~400Vac, 50/60Hz, 100% Load.
Power Factor(PF)	0.92	0.94	-	480Vac, 50Hz, 100% Load.
Power Factor(PF)	0.94	0.96	-	220-347Vac, 50/60Hz, 80%~100% Load.
Power Factor(PF)	0.91	0.93	-	400Vac, 50/60Hz, 80%~100% Load.
Power Factor(PF)	0.90	0.92	-	480Vac, 50Hz, 80%~100% Load.
Total Harmonic Distortion(THD)	-	5%	15%	220-480Vac, 50/60Hz, 100% Load.
Total Harmonic Distortion(THD)	-	10%	20%	220-480Vac, 50/60Hz, 70%-100% Load.
MCB(B16)	-	1	-	220Vac.

Output Specifications

Parameter	Min	Typ.	Max	Notes
Output Voltage Range CH 1	132Vdc	-	350Vdc	Common positive pole.
Output Voltage Range CH 2/3/4	165Vdc	-	428Vdc	
Output Voltage Range CH 1	112Vdc	-	-	Dimming lower than 30%
Output Voltage Range CH 2/3/4	145Vdc	-	-	Dimming lower than 30%
Open Circuit Voltage	-	-	500Vdc	
Output Current Dimming Range	0%		100% I _{max}	Dim to off without afterglow.
Output Current Setting Range CH 1	0.3A		3.0A	Programmable current range by DMX/DALI programmer. Common positive pole.
Output Current Setting Range CH 2/3/4	0.22A		2.2A	Programmable current range by DMX/DALI programmer. Common positive pole.
Current Accuracy	-3%	-	+3%	
Total Output Current Ripple (pk-pk)	-	1%	2%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	-	No overshoot.
Line Regulation	-1%	-	+1%	25°C±10°C ambient temperature, input voltage changes from 220Vac to 480Vac.
Load Regulation	-3%	-	+3%	25°C±10°C ambient temperature, Input Voltage 400Vac, load changes from 80% to 100%.
Turn-on Delay Time	-	-	1.5s	220~480Vac & 100% Load, load is LED.

General Specifications

Parameter	Min	Typ.	Max	Notes
CH1:133V/3.0A; CH2/3/4:182V/2.2A	93.5%	94.5%	-	Efficiency @220Vac Measured at full load and 25°C ambient temperature
CH1:350V/1.15A; CH2/3/4:428V/0.94A	94.5%	95.5%	-	
CH1:133V/3.0A; CH2/3/4:182V/2.2A	94.0%	95.0%	-	Efficiency@277Vac Measured at full load and 25°C ambient temperature
CH1:350V/1.15A; CH2/3/4:428V/0.94A	95.0%	96.0%	-	
CH1:133V/3.0A; CH2/3/4:182V/2.2A	94.5%	95.5%	-	Efficiency@347Vac Measured at full load and 25°C ambient temperature
CH1:350V/1.15A; CH2/3/4:428V/0.94A	95.5%	96.5%	-	
CH1:133V/3.0A; CH2/3/4:182V/2.2A	95.0%	96.0%	-	Efficiency@400Vac Measured at full load and 25°C ambient temperature
CH1:350V/1.15A; CH2/3/4:428V/0.94A	96.0%	97.0%	-	
CH1:133V/3.0A; CH2/3/4:182V/2.2A	95.0%	96.0%	-	Efficiency@480Vac Measured at full load and 25°C ambient temperature
CH1:350V/1.15A; CH2/3/4:428V/0.94A	96.0%	97.0%	-	
Mean Time Between Failure	-	200Khours	-	25°C±10°C ambient temperature, 220Vac,80% load (MIL-HDBK-217F/SR-332).
Lifetime	-	50Khours	-	Tc=75°C, 220Vac&100% load.
Ambient Temperature Ta	-40°C	-	+45°C	220Vac&100% load.
Ambient Temperature Ta	-40°C	-	+50°C	277Vac~480Vac&100% load.
Operating Tc for Safety Tc_s	-40°C	-	+90°C	
Operating Tc for Warranty Tc_w	-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 80% RH No condensation.
Storage Temperature Ta	-40°C	-	+85°C	
Altitude	-60m	-	4000m	
Input Under voltage Protection	170Vac	180Vac	195Vac	
External NTC (R1)	-	18K Ohm (Set by software)	-	When the R-NTC is reduced to R1, the external thermal protection is triggered and the output current gradually decreases.
External NTC (R2)	-	9.1K Ohm (Set by software)	-	When the R-NTC is reduced to R2, the output current is reduced to the programmed protection current value.
External NTC (Protection Circuit)	10%Io _{set}	60%Io _{set}	100%Io _{set}	10%Io _{set} >Io _{min} (Default setting 60%).
External NTC (Protection Circuit)	10%Io _{set}	60%Io _{set}	100%Io _{set}	10%Io _{set} ≤Io _{min} (Default setting 60%).
Over Temperature Protection Tc		95°C	100°C	Tc; 220Vac&100% load.
Short Circuit Protection	-	-	-	Self-recovery .
Dimensions (L*W*H)	500*150*81mm			
Net Weight	7100±100g/PCS			
Package	587*487*170mm; 2PCS/ctn, Gross Weight: 16Kg			

DMX Dimming

Parameter	Min	Typ.	Max	Notes
DMX+ to DMX-	-6V	-	6V	
DMX+ to Chassis	22M Ohm	-	-	At 42Vdc
DMX- to Chassis	22M Ohm	-	-	At 42Vdc
Logic 0 Input	-	-	-0.2V	DMX+ to DMX-
Logic 1 Input	0.2V	-	-	DMX+ to DMX-
Communication Baud Rate	-	250K bps	-	
Dimming Output Range	5% I_{Oset}	-	100% I_{Oset}	$I_{Oset} \geq 1.15A$ (CH1) , $I_{Oset} \geq 0.94A$ (CH2,3,4)
flashing times per second	-	-	6	0%-100% I_{set}

DALI-2 Specifications

Parameter	Min	Typ	Max	Notes
High Voltage Level	9.5V	16V	22.5V	
Lower Voltage Level	-6.5V	0V	6.5V	Return terminal is "DA-".
Dimming Output Current Range	5% I_{Oset}	-	100% I_{Oset}	$I_{Oset} \geq 1.15A$ (CH1) , $I_{Oset} \geq 0.94A$ (CH2,3,4)
Sink Current	-	-	2.0mA	
Timer dimming	-	-	-	Traditional, Self-adaption.
Output lumen compensation	-	-	-	Constant lumen output function.

Note:

All specifications are typical at 25°C.

Safety Specification

Parameter	CCC	CE+ENEC+SAA	UL	Notes
Dielectric Strength (Input-Ground)	2000Vac	2000Vac	2000Vac	60s, Current not exceeding 10mA.
Dielectric Strength (Output-Ground)	2000Vac	2000Vac	2000Vac	60s, Current not exceeding 10mA.
Dielectric Strength (Input-Dim)	4000Vac	4000Vac	2000Vac	60s, Current not exceeding 10mA.
Grounding Resistance	0.1Ω(Max)			25°C±10°C Ambient Temperature, pass 25A Current, 60s.
Insulation Resistance	10MΩ(min)			Input-PE, Output-PE, 500Vdc/60s/25°C/70%RH.

Safety Compliance

Safety Category	Standards	Approved	Notes
CCC	GB/T19510.213,GB/T19510.1	√	
CE	EN61347-1, EN61347-2-13	√	
CE	EN62493	√	
ENEC	EN62384	√	
CB	IEC61347-1, IEC61347-2-13		
BIS	IS 15885(PART 2/SEC 13)		
UL	UL 8750		
CUL	CSA C22.2 No.250.13		
KC	K61347-1, K61347-2-13		
PSE	J61347-1, J61347-2-13		
SAA	AS/NZS IEC 61347.2.13		
SAA	AS/NZS 61347.1		


EMC Compliance

EMC Category	Standards	Approved	Notes
CCC	GB/T 17743, GB 17625.1	√	
CE	EN 55015	√	
CE	EN 61000-3-2, EN 61000-3-3	√	
CE	EN61000-4-2,3,4,5,6,11	√	
CE	EN 61547	√	
KC	K61547		
KC	K00015		
PSE	J55015		
FCC	FCC part 15		

RoHS

Our products comply with RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.


Inrush Current

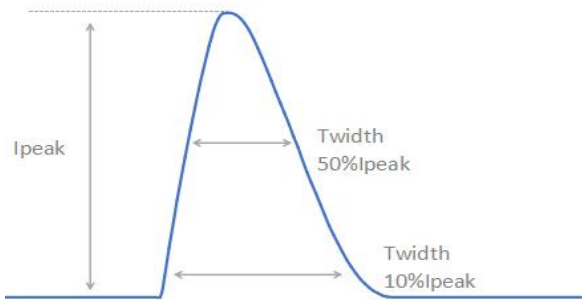


V_{in}	I_{peak}	$T(@10\% \text{ of } I_{peak})$	$T(@50\% \text{ of } I_{peak})$
220Vac	14.6A	3.38ms	1.92ms
277Vac	18.6A	3.62ms	2.06ms
347Vac	23.0A	3.86ms	2.28ms
400Vac	26.6A	3.84ms	2.28ms
480Vac	30.4A	4.44ms	2.82ms

Output Voltage vs. Output Current

1. Output Channel 1

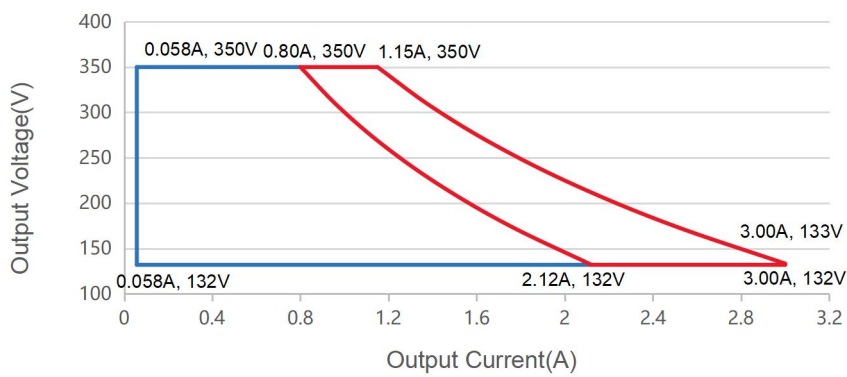


2. Output Channel 2/3/4

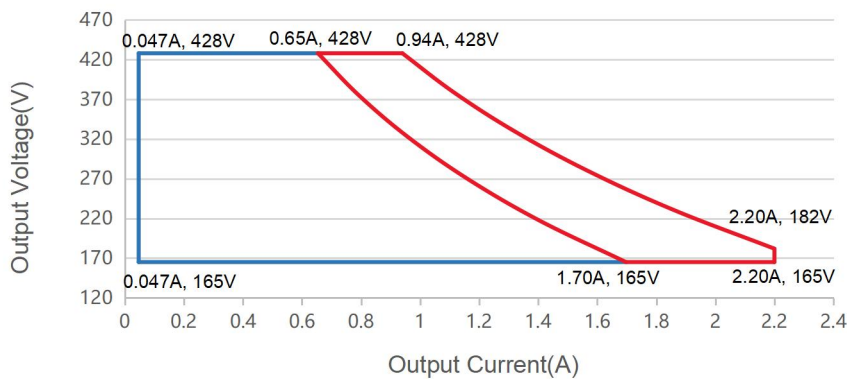


Red curve: good performance area

Output Power vs. Input Voltage

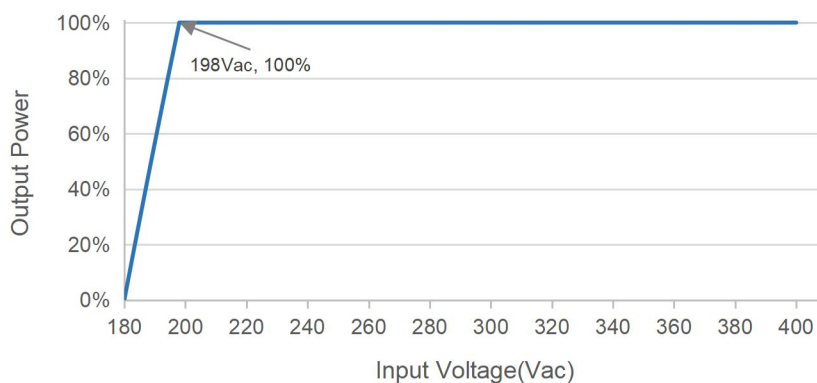


Efficiency vs. Load


Output Channel 1: 132V/3.0A; Output Channel 2/3/4: 182V/2.2A

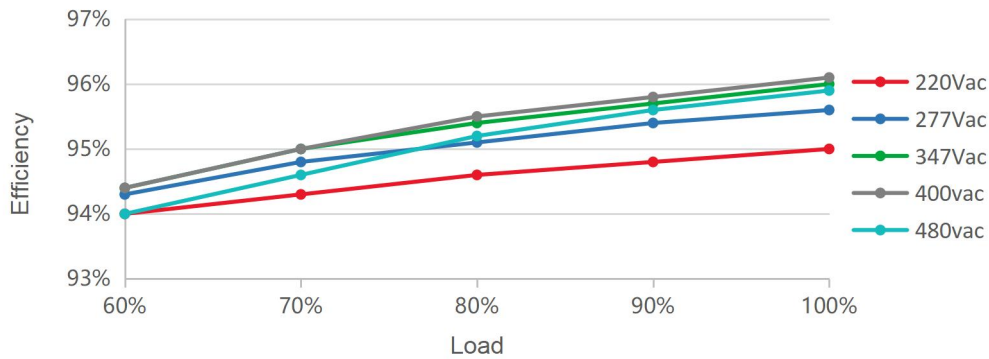


Output Channel 1: 350V/1.15A; Output Channel 2/3/4: 428V/0.94A

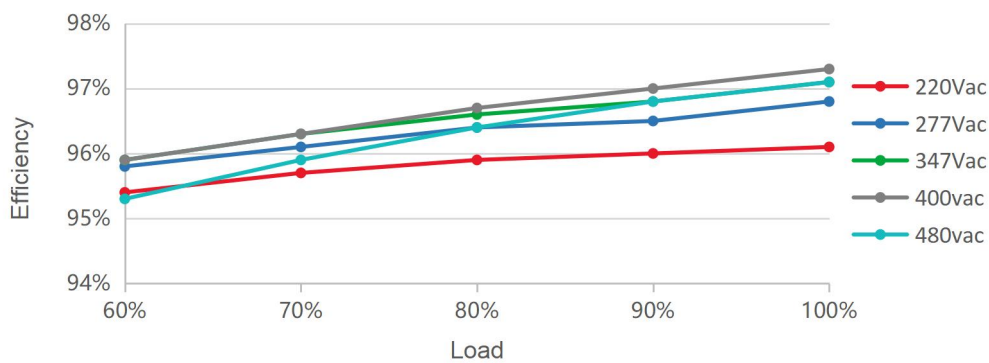


PF vs. Load

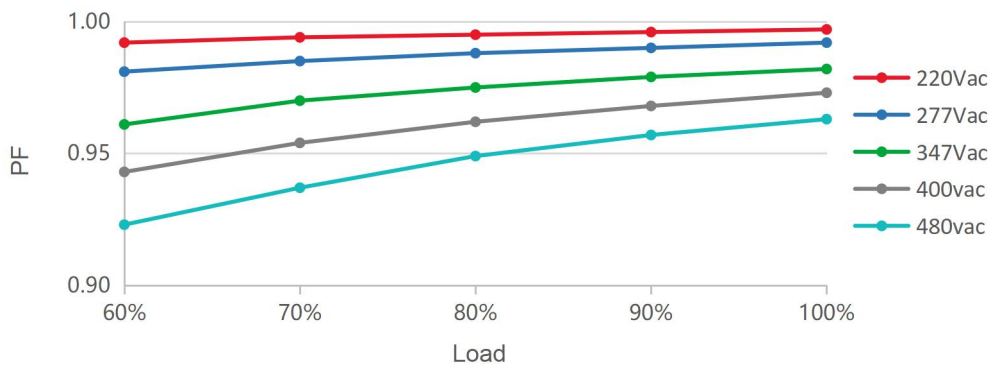


THD vs. Load

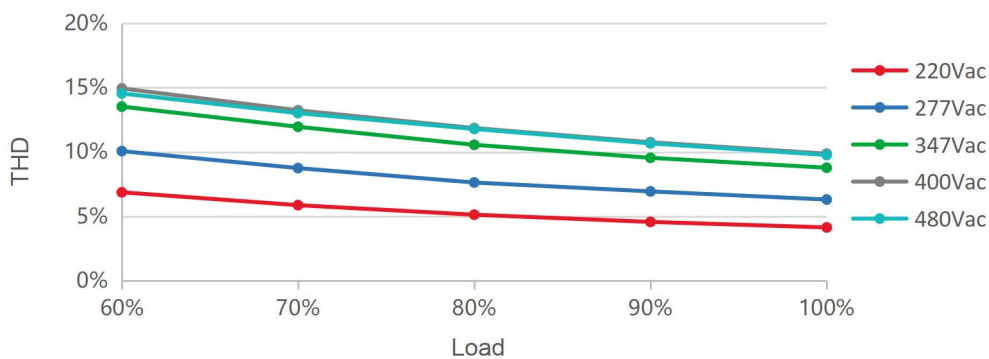


Output Power vs. Ambient Temperature

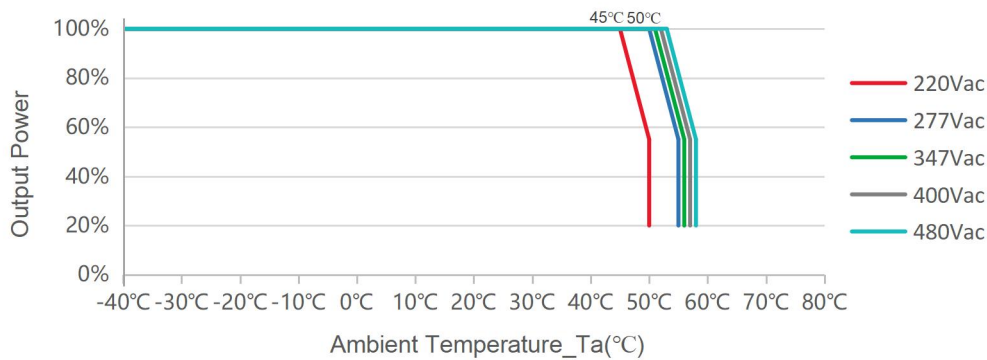


Lifetime vs. Case Temperature

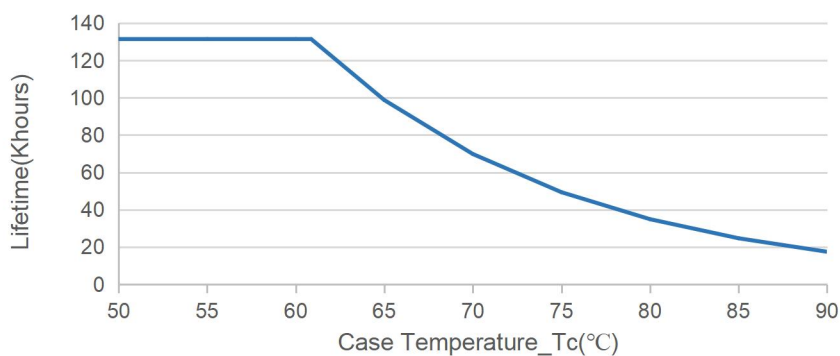

DMX Dimming Curve

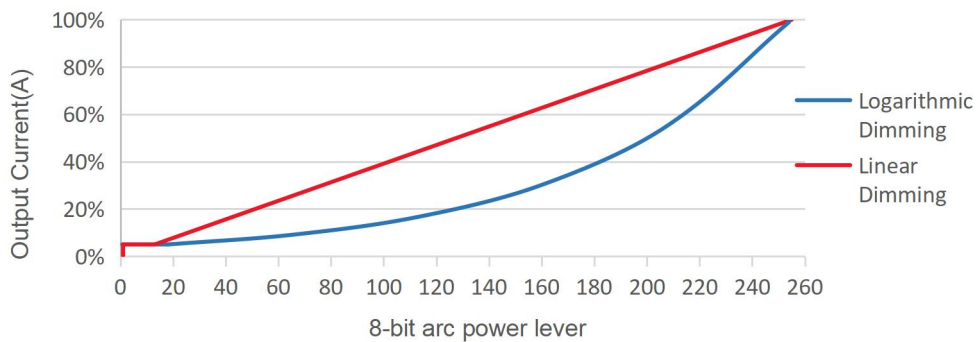


DALI-2 Dimming Curve

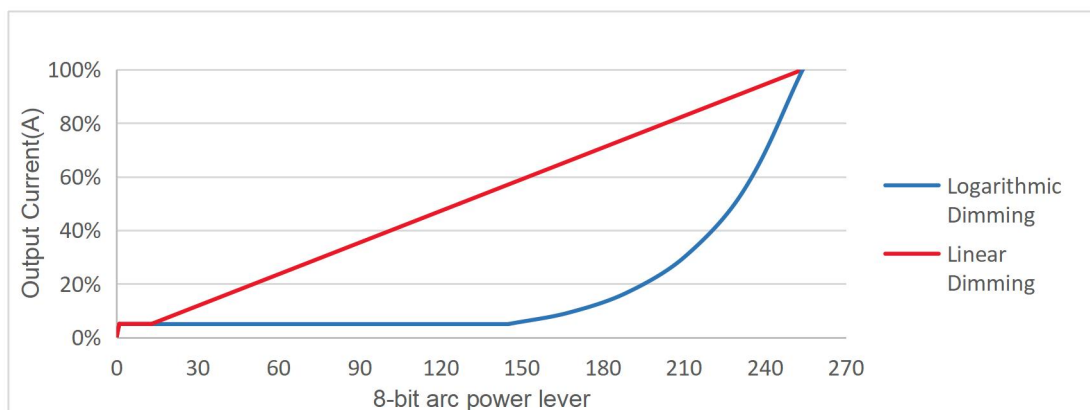

Note: Factory Default Output Logarithmic Curve.

Implementation: DMX512 Daisy chain

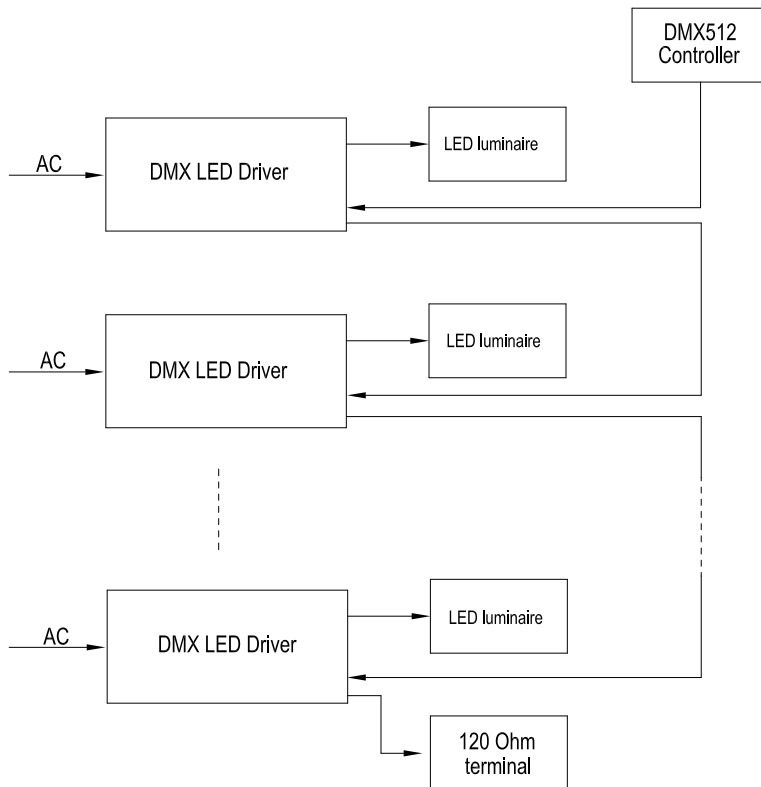


Note:


- [1]. Up to 32 drivers may be daisy-chained, terminated by a 120 Ohm resistor (connected between DMXA & DMXB as the last driver).
- [2]. 300m maximum length.
- [3]. 100m maximum between drivers.
- [4]. For best performance, a characteristic impedance of 120 Ohm should be maintained for the entire length of the control wire.

Programming Link (DMX)

■ For DALI

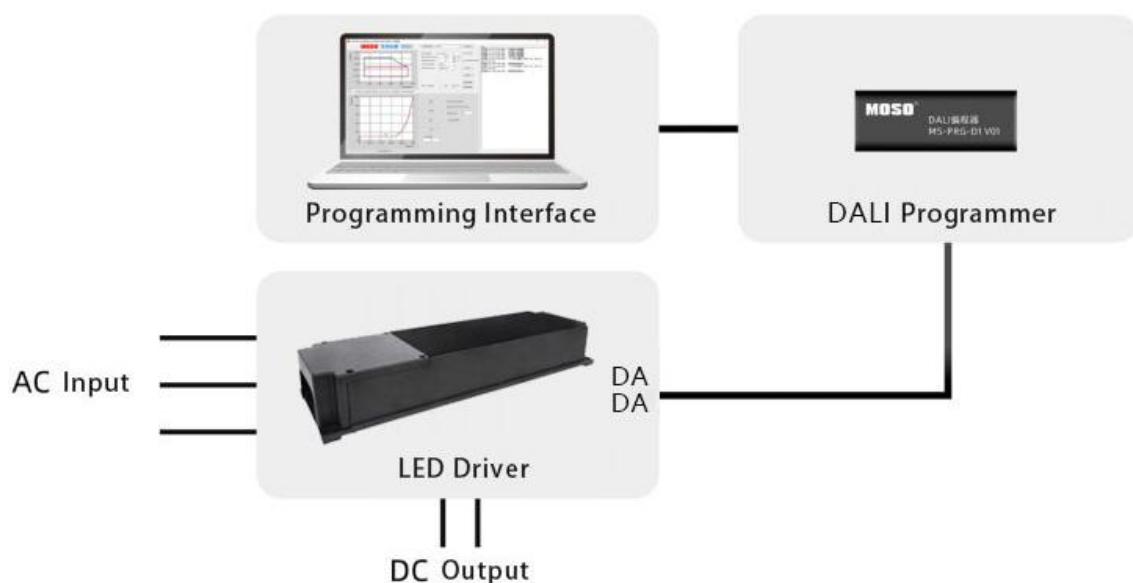

■ For Dmx

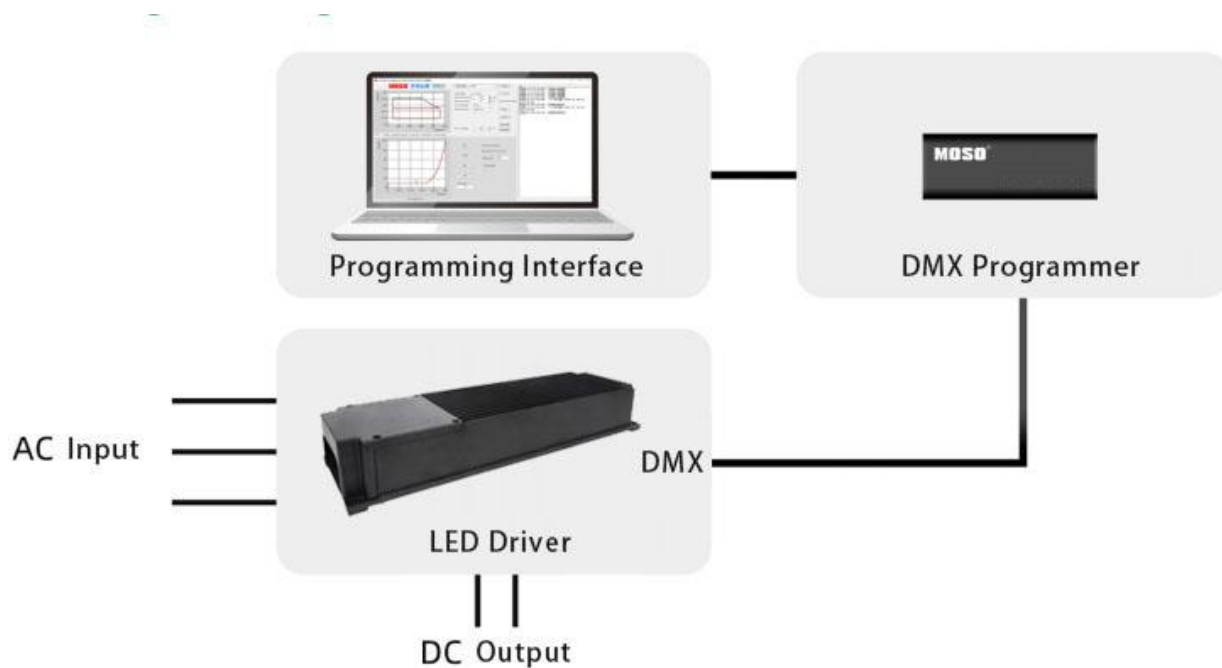

1. Dimming Mode Switching for DALI-2 & DMX-RDM


1.1 Switching from DALI-2 Dimming to DMX-RDM:

- After connecting the DMX programmer to computer, click on the software "Scan Port" button;
 - Click "Read Cfg" to import the corresponding model's DMX configuration file;
 - Click 'Set' button to transmit the .cfg file into the driver's MCU;
 - After setting and restarting the driver, the software interface displays the DMX dimming mode, indicating successful conversion;
- Note: If the third step fails to set, select "FFFFFFFFFFFF" for the Device UID and reset the driver.

1.2 Switching from DMX-RDM to DALI-2 Dimming:

- After connecting the DALI programmer to computer, click on the software "Scan Port" button;
- Click "Read Cfg" to import the corresponding model's DALI configuration file;
- Click 'Set' button to transmit the .cfg file into the driver's MCU;
- After setting and restarting the driver, the software interface displays the DALI-2 dimming mode, indicating successful conversion;

2. Operating instructions

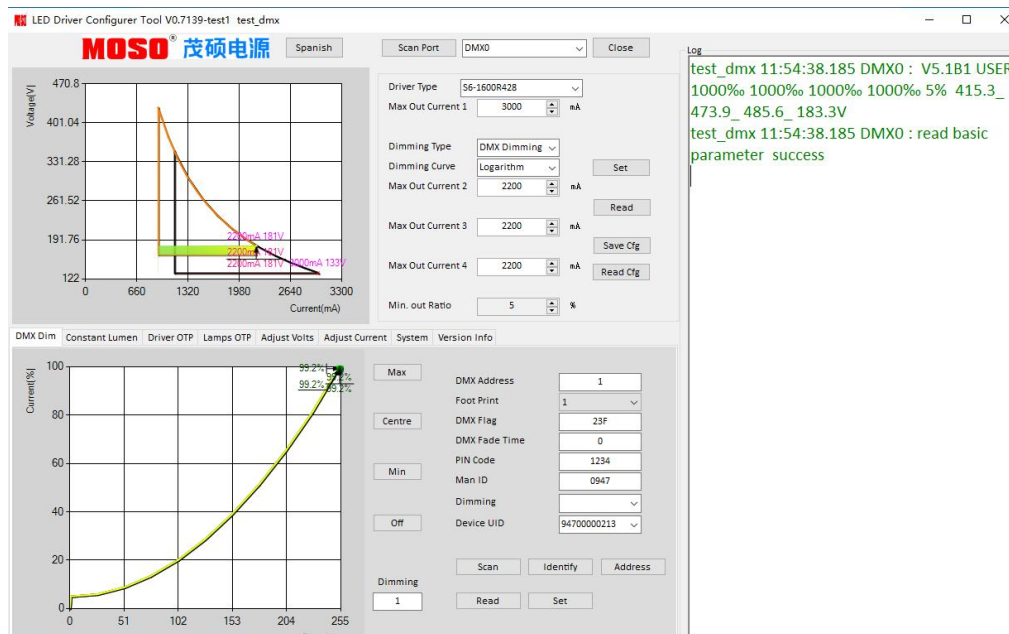

DALI/DMX visual software programming

1. Use corresponding programmer to connect with driver.


2. The output current of the four channels is independent. When setting the current, each channel needs to be modified.

3. The current parameters and configured driving parameters can be read and set.

4. Time dimming. Set the timing control function, which supports 7 segments.

5. Driver OTP and Lamps OTP. The Driver OTP and Lamps OTP parameters can be set according to the needs of customers.

2. NTC

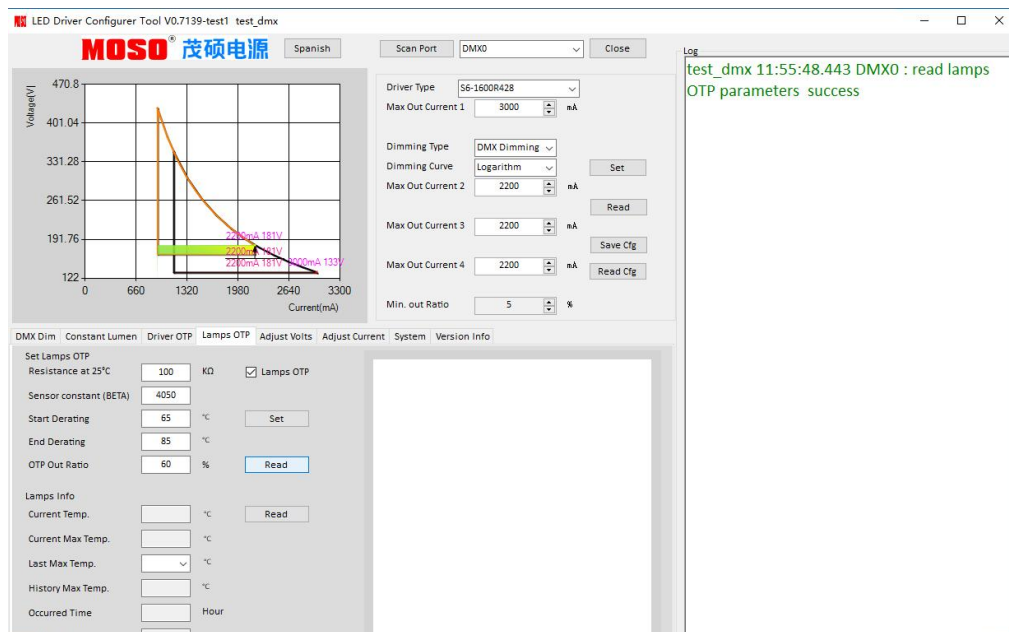


The recommended value of NTC resistance is 100K Ω , BETA: 4050

NTC resistance value changes with temperature:

40°C	48.6K Ω -58.8K Ω ;
60°C	21.8K Ω -26.3K Ω ;
65°C	18.1K Ω -22.1K Ω ;
70°C	15.1K Ω -18.6K Ω ;
75°C	12.7K Ω -15.8K Ω ;
80°C	10.7K Ω -13.4K Ω ;
85°C	9.1K Ω -11.5K Ω ;

3.DMX interface parameters

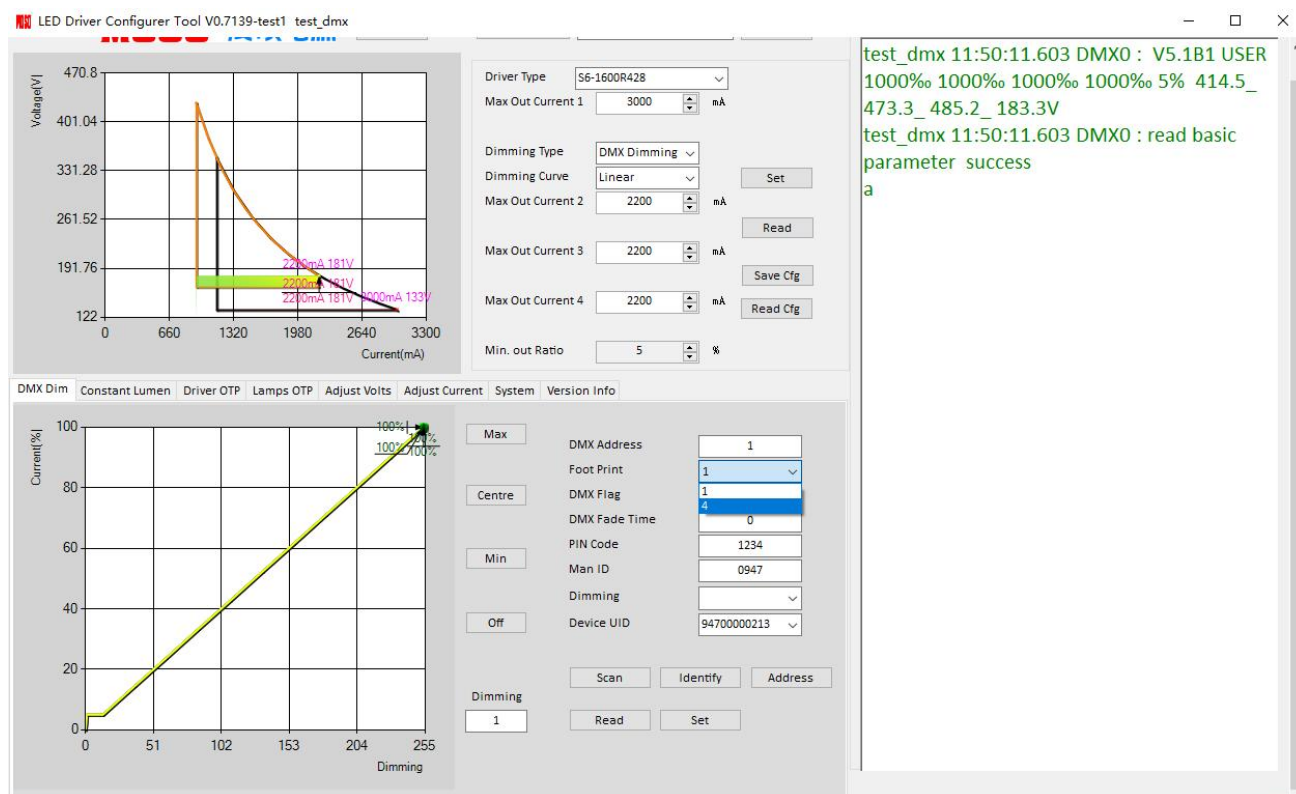

◆ Scan

When the DMX control system is connected to a new driver, customer need to click the **"Scan"** button to scan the new driver. The Configurer Tool will automatically read the Device UID of the newly connected driver in the system. The UID of the driver is displayed on the right LOG page. When the Device UID displayed by the Configurer Tool is consistent with the actual device UID of the driver, you can perform the next operation on the DMX driver, otherwise the software will display "read basic parameter fail".

◆ Identify

The specific position of the driver can be identified by this function. Click the **"Identify"** button, and the light connected to the corresponding driver will flash to indicate its location.

◆ Foot print

This function is used to assign the number of addresses. If 1 is selected, the four channels share a single DMX address, and if 4 is selected, the four channels use four different DMX addresses.

◆ Address

Driver assignment DMX address can be modified. With this function, customer can enter any number within 512 into the **"DMX Address"** to reassign the DMX address of a driver. Entering the number, then click **"Address"** to complete the address setting.

The number of driver channels corresponds to the number of **DMX addresses** occupied by the driver. The Address window displays the address of the first channel. For example, if the address of the first channel is 6, the address of the second channel is 7 and the address of the third channel is 8.

⚠ Note: So for multichannel DMX drivers, the maximum configurable address equals : $512 - (\text{number of channels}) + 1$, Unlike the **"Address"** button, which can

only modify the DMX address of the driver, **"Set"** can set all the DMX parameter modified by customer into the driver.

◆ DMX Flag

The software displays the hexadecimal code and converts the corresponding binary code to correspond to functions. 1 indicates that the function is enabled and 0 indicates that the function is disabled. At present, only ten functions are supported.

For example, 23F=10 ,0011 ,1111 indicates that functions 0~5 and 9 are enabled.

◆ Dimming

This function is used to read the dimmer value data of the driver in real time and return the value.

◆ DMX fade time

The Fade Time will be started when the system changes the dimming value. The maximum of Fade Time for each steps can reach 2500ms, The calculation method is set value multiplied by 10ms.

The longest total time spent will be 635 seconds when dimming value has changed from 0 to 254 with maximum Fade Time. The calculation formula is as follows:

255 steps (whole dimming value has changed)*2500ms (maximum fade time) ÷1000 (Unit conversion: from microseconds to seconds) =635 seconds.


◆ PIN Code



The password for each driver to join the customer's control system.

◆ Device UID


A window used to select the device UID of the driver. Use the **"Scan"** button to automatically switch the device UID of the driver newly connected to the system, or manually select the device UID previously connected.

Mechanical Outline

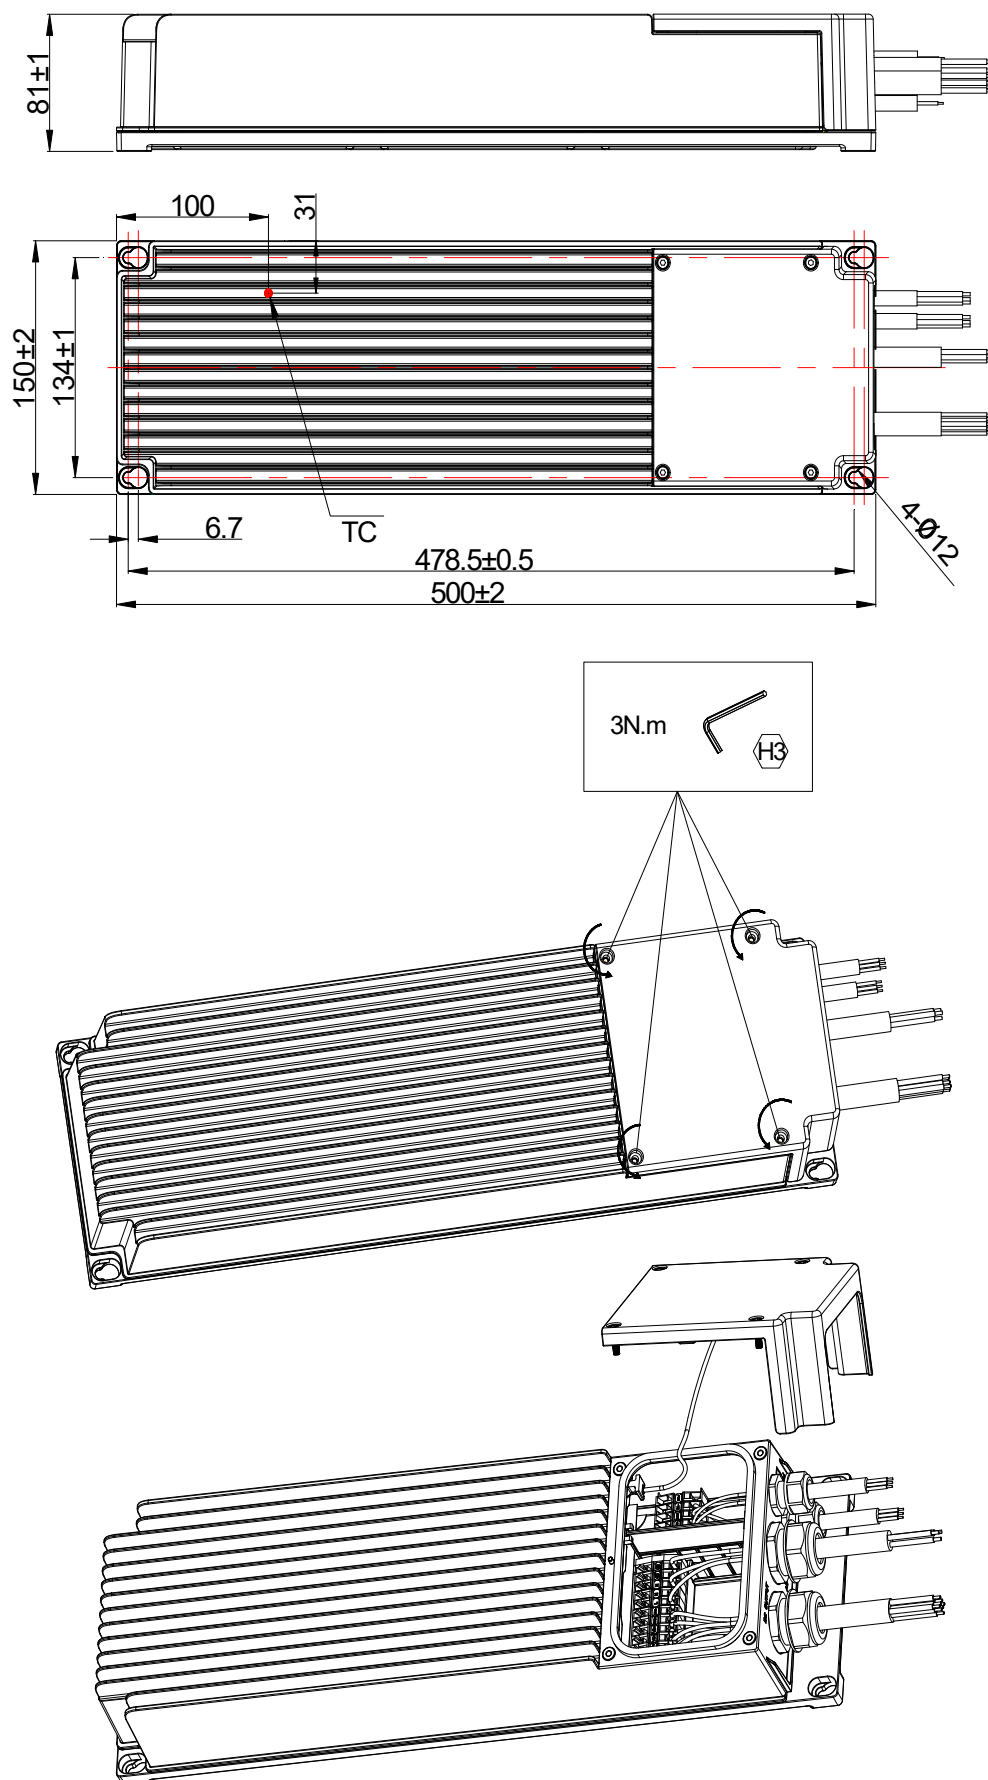


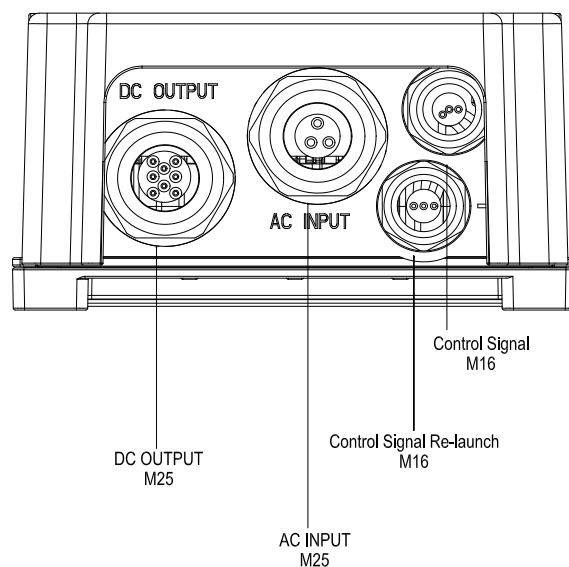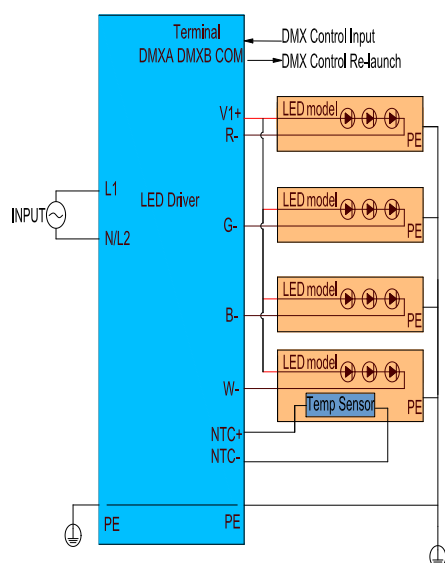

R, G, B, W cannot be connected together

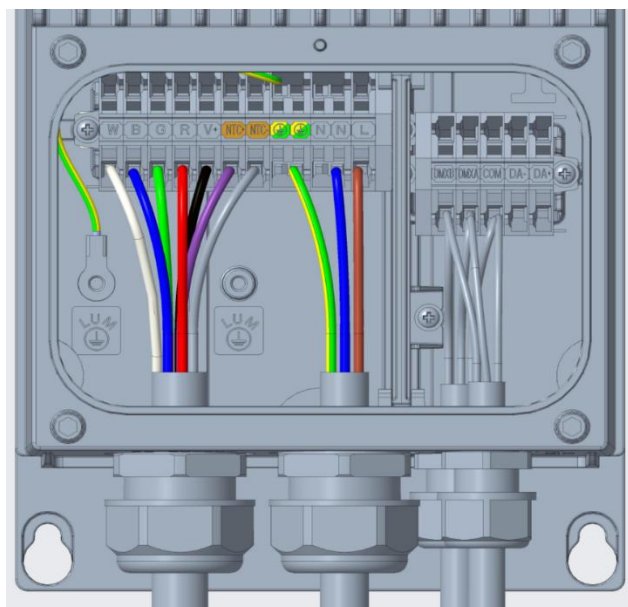

DMX Wiring Connection

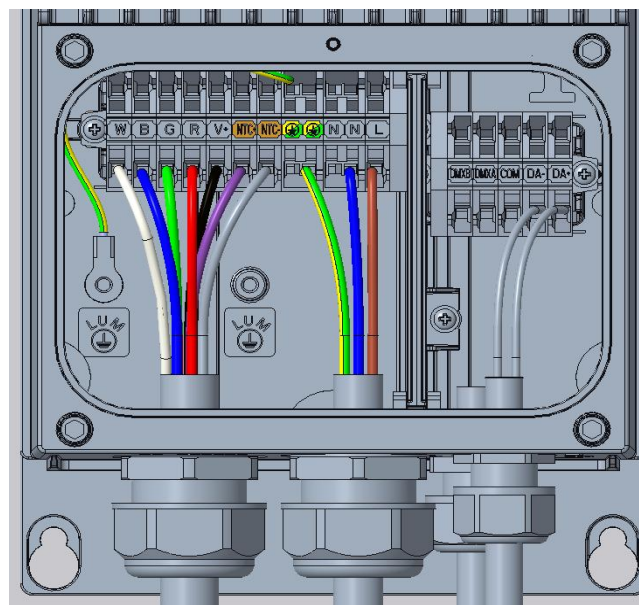

DALI Wiring Connection

Connections

Wire	Recommended wire Specification	Note
Input	M25 wire diameter range 9-16mm, optional for 13-18 mm ; Wire Cross-section: 1.0 mm ² -2.5 mm ² /16AWG-12AWG	
Output, NTC	M25 wire diameter range 9-16mm, optional for 13-18 mm ; Wire Cross-section: 1.0 mm ² -2.5 mm ² /16AWG-12AWG	
Dimming (DMX)	M16 wire diameter range 4-8mm, optional for 2-6mm Wire Cross-section: 0.5 mm ² -1.5 mm ² /22AWG-16AWG	
Dimming (DMX Re-launch)	M16 wire diameter range 4-8mm, optional for 2-6mm Wire Cross-section: 0.5 mm ² -1.5 mm ² /22AWG-16AWG	

Terminal	Recommended Connection Specification	Note
Input	M25, the torsion 5~6N.m	
Output, NTC	M25, the torsion 5~6N.m	
Dimming (DMX)	M16, the torsion 1~2N.m	
Dimming (DMX Re-launch)	M16, the torsion 1~2N.m	

Label (DMX)

MOSO[®] S6-1K6R428
 LED DRIVER(LED控制装置)
 Constant current type(恒流模式)
 Integrated SPD(内置防雷管)

Max. U_{out}(最大电压)= 500V==

INPUT 输入	220-400V~ 50/60Hz, 8A Max. PF:0.9C-0.98, 1720W
OUTPUT 输出	R output channels Single channel: 132-350V== 1.15-3.00A, 400W G/B/W output channels Single channel: 165-428V== 0.94-2.20A, 400W Total Max.Power(最大功率): 1600W
t _c : 90°C	t _a : 45°C 220-277Vac t _a : 50°C 277-400Vac

深圳茂硕电子科技有限公司/深圳市南山区西丽松白路1061号
 SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD
 No.1061, Songbai Road, Xili Town, Nanshan District,
 Shenzhen, CHINA
 MADE IN CHINA
 For LED module only

Label (DALI)


MOSO[®] S6-1K6D428
 LED DRIVER(LED控制装置)
 Constant current type(恒流模式)
 Integrated SPD(内置防雷管)

Max. U_{out}(最大电压)= 500V==

INPUT 输入	220-400V~ 50/60Hz, 8A Max. PF:0.9C-0.98, 1720W
OUTPUT 输出	R output channels Single channel: 132-350V== 1.15-3.00A, 400W G/B/W output channels Single channel: 165-428V== 0.94-2.20A, 400W Total Max.Power(最大功率): 1600W
t _c : 90°C	t _a : 45°C 220-277Vac t _a : 50°C 277-400Vac

深圳茂硕电子科技有限公司/深圳市南山区西丽松白路1061号
 SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD
 No.1061, Songbai Road, Xili Town, Nanshan District,
 Shenzhen, CHINA
 MADE IN CHINA
 For LED module only

Cautions Label

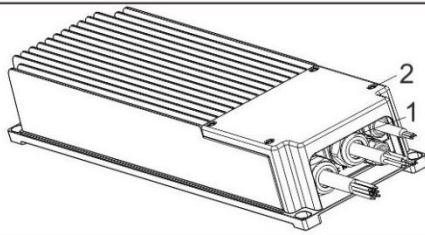

CAUTIONS

1. After the wiring is connected according to the datasheet, ensure that the gland is effectively locked to prevent water from damaging the driver.
2. When closing the electrical cover after wiring, ensure that the four fixing screws effectively tightened to prevent water from damaging the driver.

Shipping Barcode Label Standard

2	2	1	2	1	2	1	0	5	7	0	1	A	1	0	0	0	1
Year		month		day		Part of production order number				Engineering level		REVISION RR	Production line number		Progressive Serial number		

Version

A.1	First release	

Specification for Approval

Product Name: 1600W Non-isolate LED Driver

Product Model: S6-1K6Y428

Rev : A.1

Address: XiLi Songbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: info@mosopower.com

Web Site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

Specification for Approval

Product Name: 1600W Non-isolate LED Driver

Product Model: S6-1K6Y428

Rev: A.1

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

Address: XiLi Songbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: info@mosopower.com

Web Site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By