

未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

A

B

C


D

A

B

C

D

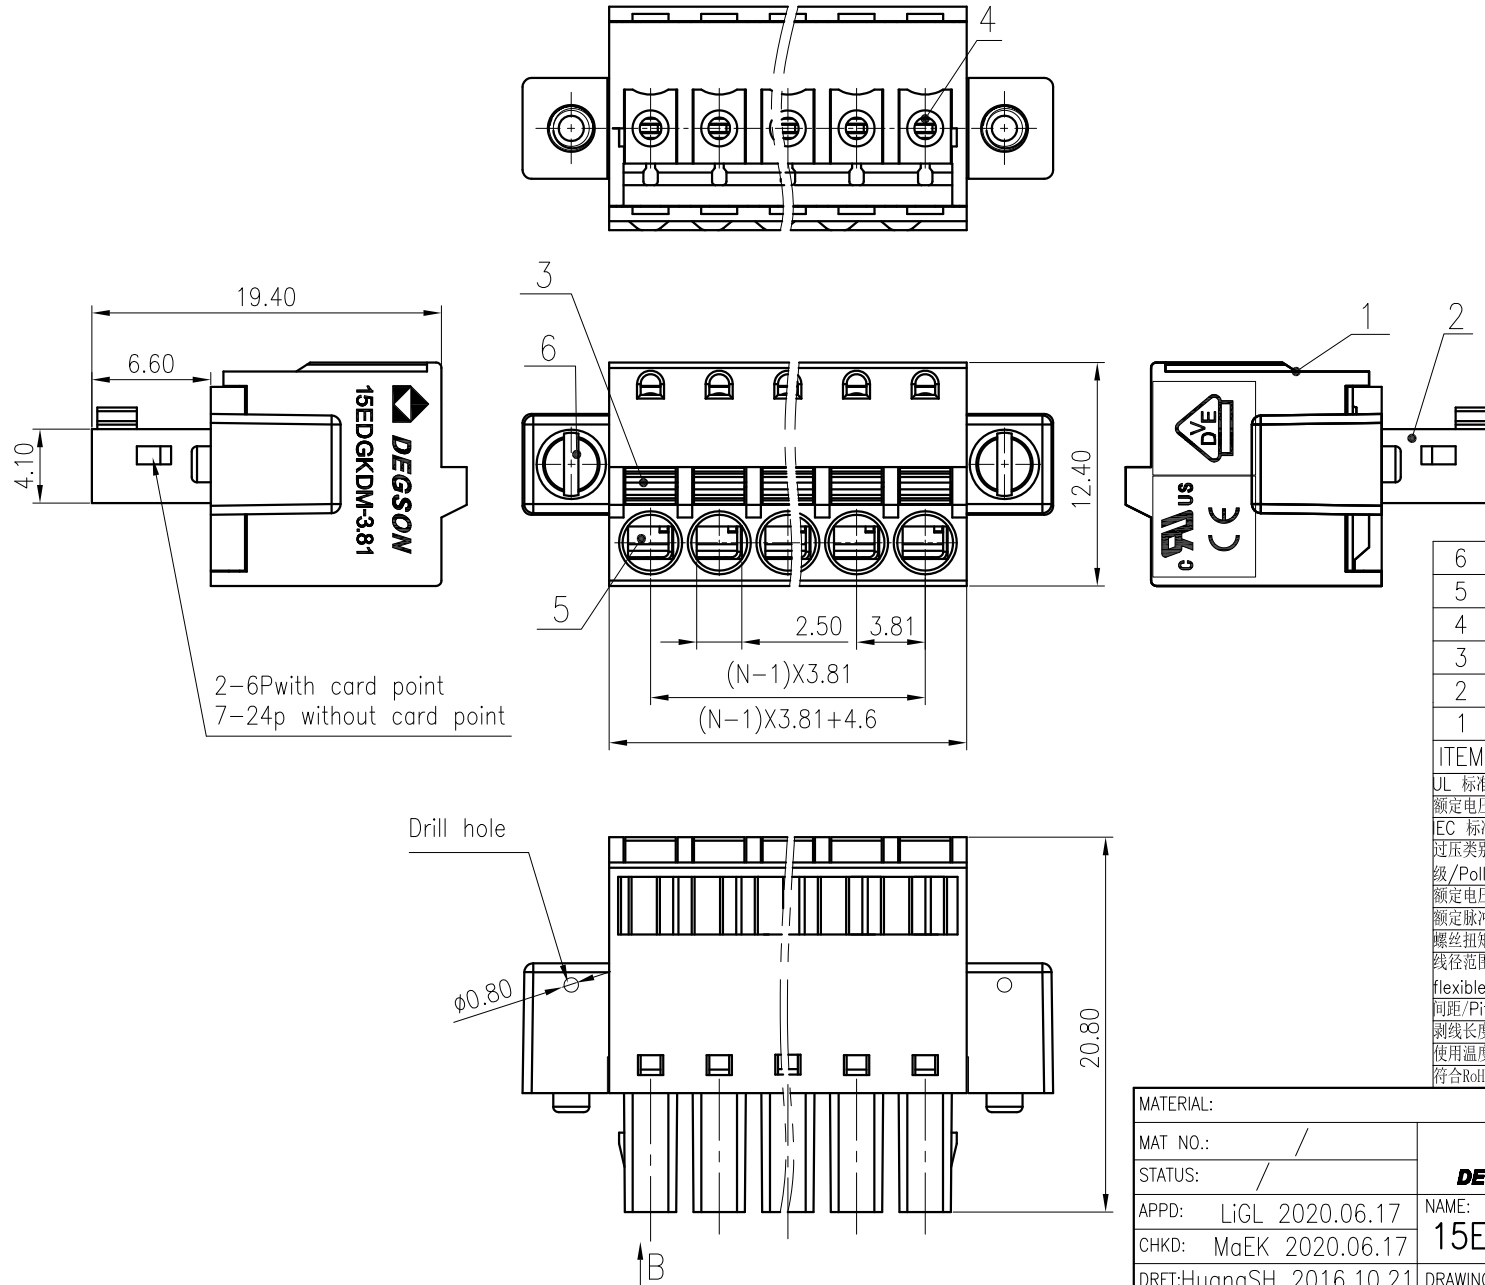

2-6P with card point  
7-24p without card point

ITEM	NAME OF PART	MATERIAL	NOTES	
6	Screw	Steel	Zn Plated	
5	Spring	Stainless steel		
4	Clamp	Copper alloy	Sn Plated	
3	Button	POM	UL94HB	
2	Cover	PA66	UL94V-0	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	300/8	300/8
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/3
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	250/12
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/	2.5
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.5 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)		0.2~1.5/28~16		
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P		
剥线长度/Stripping length(mm)		9		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL:		SURFACE:	
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	LiGL 2020.06.17	NAME: 15EDGKDM-3.81-XXP-1Y-00A(H)	
CHKD:	MaEK 2020.06.17	DRAWING NO.: 15EDGKDM-3.81-E01	
DRFT:	HuangSH 2016.10.21	REV	T1
SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2.5:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE