
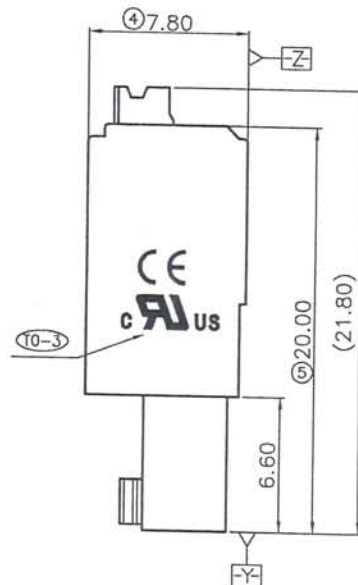
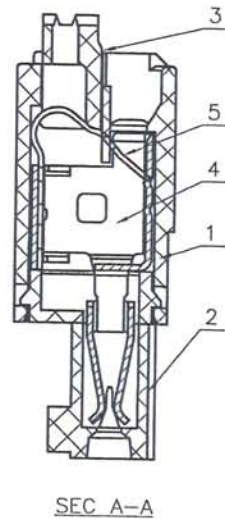
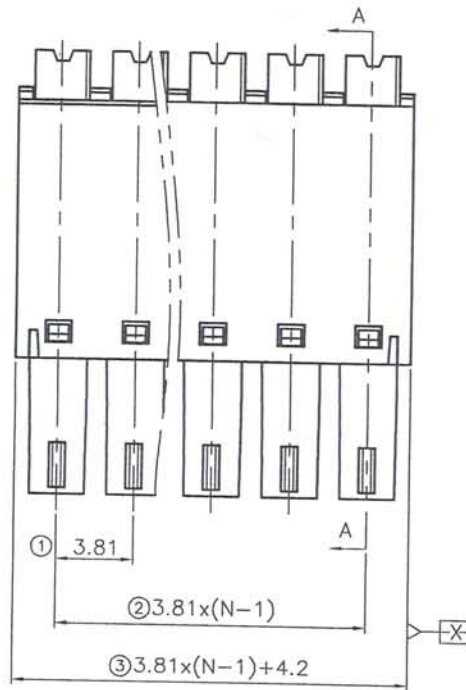


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
(TO-2)		新增CUL&UL刻字	Dong	12/24/15"
(TO-3)	16-0047	新增CUL&UL刻字,正式发行	Dong	02/25/16"

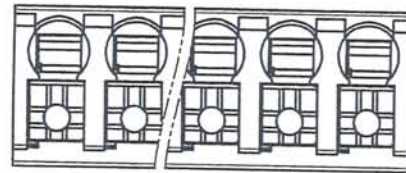

备注一:

UL 标准

1. 额定电压与电流 : 300V / 8A
2. 工频耐压 : AC1600V/1Min.
3. 线径范围 : 28~16AWG

IEC 标准

1. 污染等级	2	2	3
安装类别	II	III	III
额定脉冲电压(KV)	2.5KV	2.5KV	2.5KV
额定电压(V)	250V	160V	160V
额定电流(A)	8A		

2. 线径范围 : 0.2~1.0mm<sup>2</sup>

备注二:

1. 尺寸标注符合标准 ASME Y14.5-2009
2. P距 : 3.81mm, P数范围 : N=02~24P
3. 剥线长度 : 10mm
4. 使用温度范围 : -40°C~+105°C
5. "⊗"为重点管控尺寸
6. 包装规范: SOP-1Y-0953
7. 未注公差表:

P距方向公差(mm)		其他尺寸公差(mm)						
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±1'

8. 须符合RoHS环保要求

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	15EDGKN-3.81-1000A-弹片	X000006130(H)	N	不锈钢	
4	15EDGKN-3.81-1000A-夹子	1103B00030(H)	N	磷青铜	镀锡
3	15EDGKN-3.81-1000A-按钮	1103DYY01D(H)	N	PA66	UL94V-0
2	15EDGKN-3.81-1000A-盖	1418CYXXC(H)	1	PA66	UL94V-0
1	15EDGKN-3.81-1000A-塑件	1418AYXXC(H)	1	PA66	UL94V-0

PART NO.: 1	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD: <i>Daron n/hz</i>	NAME: 15EDGKN-3.81-XXP-1Y-1000A(H)		
CHKD: <i>Xmm1/2/16</i>	TITLE: ASSEMBLY DRAWING		
DRFT: XHY 03/31/15"	DRAWING NO.: 15EDGKN-3.81-E02		REV TO-3
THIRD ANGLE PROJECTION	DRAWING NO.: 15EDGKN-3.81-E02		SHEET 1/1
	DO NOT SCALE DRAWING		SCALE 1:1