


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A

B

C

D

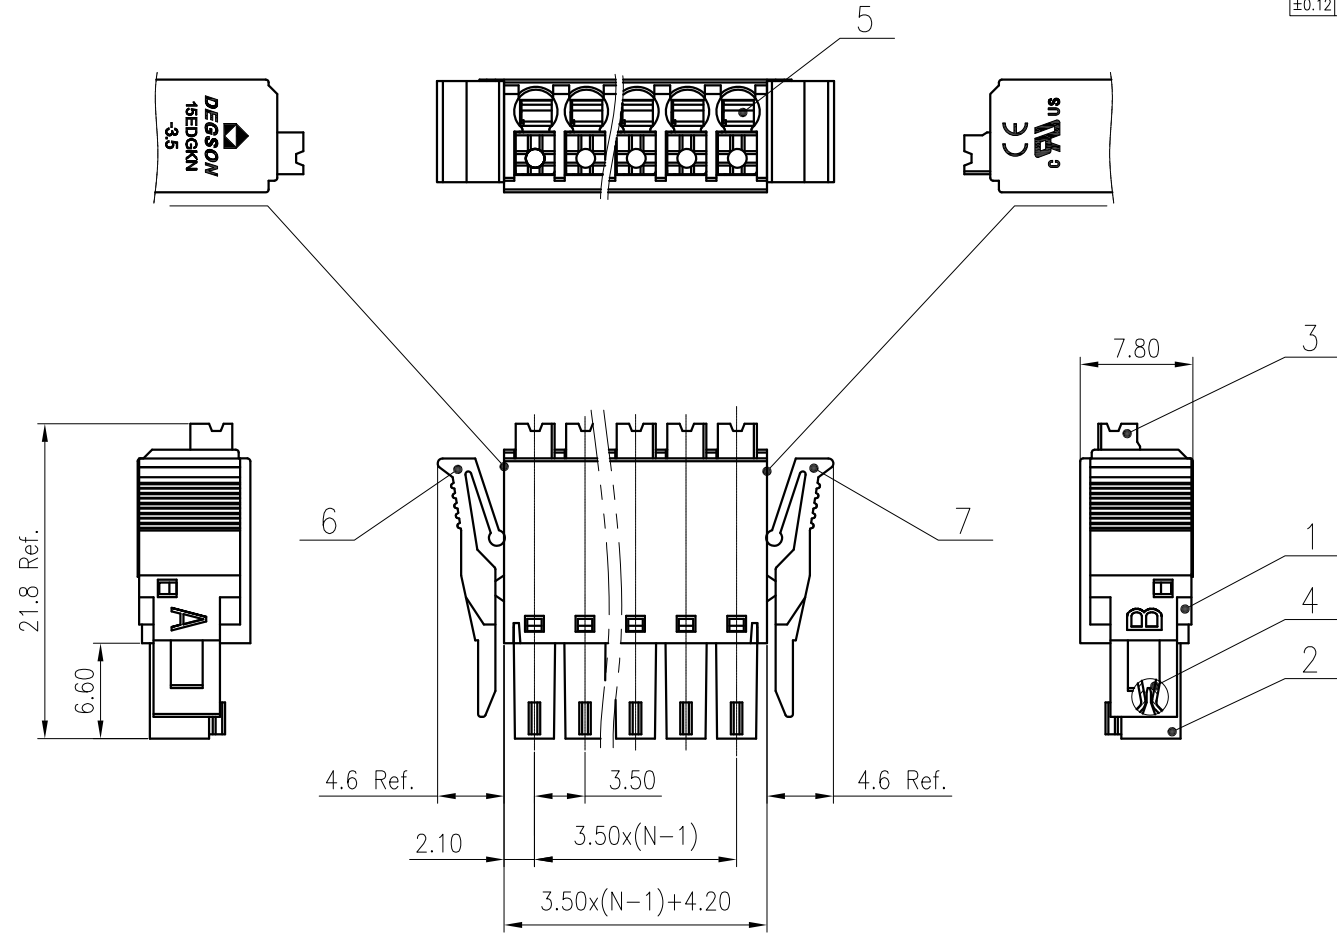

15EDGKNG-3.5-XXP-1Y-1000AH
15EDGKNG-3.5 - series
XXP - number of Poles (number of Pins)
1 - single-row
Y - color of housing (4 - green color)
1000AH - no value

ITEM	NAME OF PART	MATERIAL	NOTES
7	Right Pendant	PA66	UL94V-0
6	Left Pendant	PA66	UL94V-0
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/ 300/8
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2	/ /
额定电压/电流/Rated Voltage(V)/Current(A)		250/8	/ /
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	/ /
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		28~16/0.2~1.0	
间距/Pitch(mm)/线数范围/Poles		3.50/N=02~20P	
剥线长度/Stripping length(mm)		10	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	LiGL 2020.06.15	NAME:	
CHKD:	MaEK 2020.06.15	15EDGKNG-3.5-XXP-1Y-1000A(H)	
DRFT:	Wang LX 2020.04.01	DRAWING NO.:	15EDGKNG-3.5-C02
REV	ECN	DESCRIPTION	DRFT
DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1
			SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE