

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

仅供参考
 签字: 蓝贵凡
 日期: 2018.09.12

NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 300V / 8A
- 2. Withstanding Voltage : AC1600V/1Min.
- 3. Wire Range : 28~16AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	250V	160V	160V
Rate current(A)	8A		


- 2. Wire Range : 0.2~1.0mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.81mm, Poles : N=02~20P
- 3. Stripping length : 10.0mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					-	-	□
TO	Over TO	TO	Over TO	TO	Over TO	TO	TO	TO	
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100 TO 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

- 6. RoHS Compliance

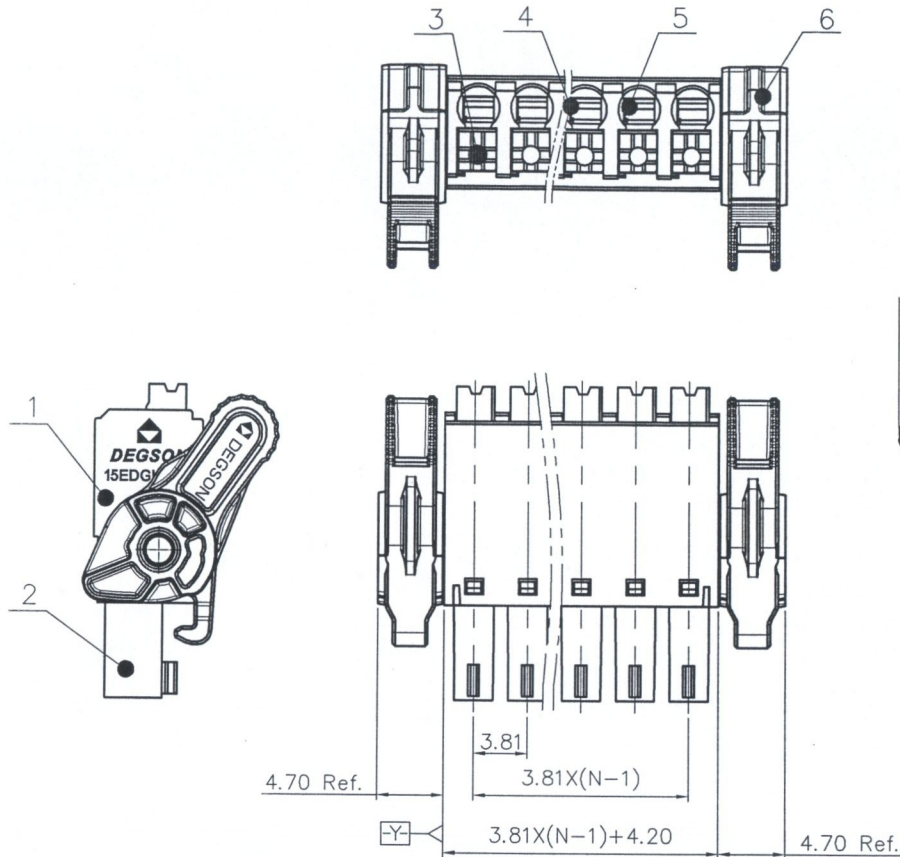

15EDGKNGB - 3.81 - XXP - 1Y - 1000A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

1000A-(Standard) (RoHS)

ITEM	NAME OF PART	MATERIAL	NOTES
6	Handle	PA66	UL94V-0
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: Alan 2018.09.12	NAME: 15EDGKNGB-3.81-XXP-1Y-1000A(H)	TITLE: CUSTOMER DRAWING	
CHKD:	DRFT: Ethan 11/11/16"	REV	DO-1
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGKNGB-3.81-C01	SHEET 1/1
DO NOT SCALE DRAWING		SCALE	1:1