
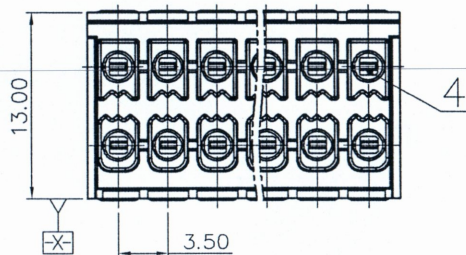

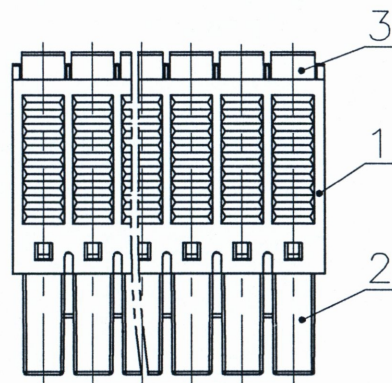
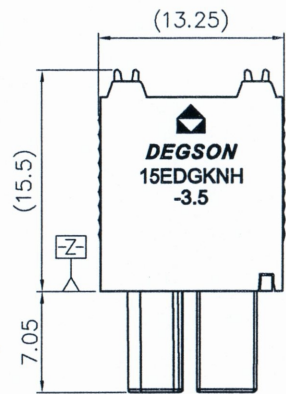


⑩-3 15EDGKNH - 3.5 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch)(Poles)

(RoHS)
 00A-(Standard)
 (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)
 (Single Pitch)

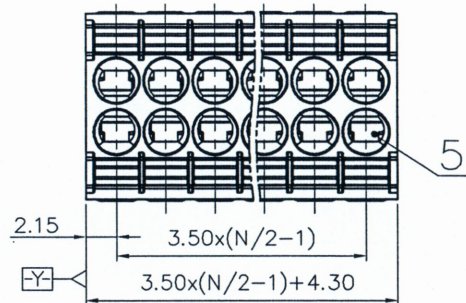

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
T0-2	17-0164	1.add VDE mark 2.modify rate current	Ethan	2017.06.26
T0-3		Modify rate voltage Add name description	GWG	2018.06.04

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 8A
- 2.Withstanding Voltage : AC1600V/1Min.
- 3.Wire Range : 26~16AWG

IEC Standard

1. Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	320V	250V	200V
Rate Current(A)	9.5A		

- 2. Wire Range : 0.2~1.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50mm, Poles : N=04~48P
- 3.Stripping length : 10.0mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm							0.1/10
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

仅供参考图
 签字: 蓝贵成
 日期: 2018.09.12

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: <i>Jan 2018.9.12</i>	NAME: 15EDGKNH-3.5-XXP-1Y-00A(H)		
	CHKD: <i>Shen 2018.9.12</i>	TITLE: CUSTOMER DRAWING		
	DRFT: Ethan 2016.09.09	REV: T0-3	SHEET: 1/1	
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGKNH-3.5-C01	SCALE: 1:1	
		MM (INCH)	DO NOT SCALE DRAWING	