



raised structure position

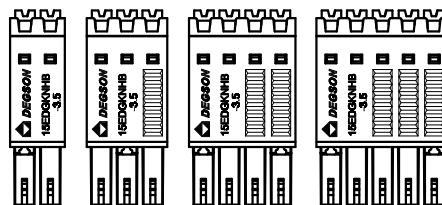


04P 06P 08P 10P

未注公差/General tolerances(mm)											D 0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20
												±2'







Grey 3

$$3.50 \times (N/2 - 1) + 3.90$$

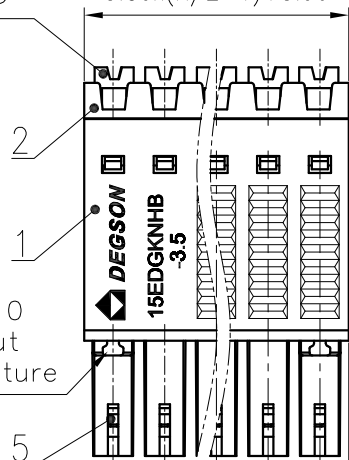

More than 10 poles without raised structure

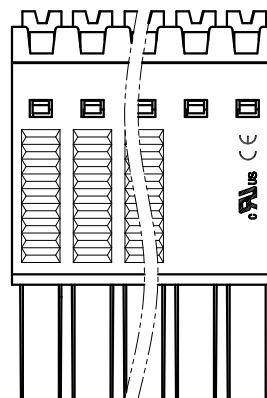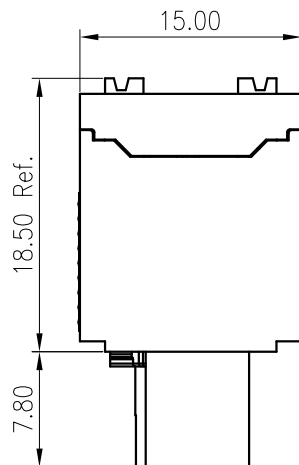

5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66-GF	UL94V-0
2	Cover	PA66-GF	UL94V-0
1	Housing	PA66-GF	UL94V-0

ITEM	PART NAME	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	50/10 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)		160/13.4	160/13.4 320/13.4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	2.5 2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~1.5/28~16	
间距/Pitch(mm)/线数范围/Poles		3.50/N=04~48P	
剥线长度/Stripping length(mm)		10~11	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Li GL 2020.06.04	NAME: 15EDGKNHB-3.5-XXP-1Y-00A(H)		
CHKD: Ma EK 2020.06.04	DRAWING NO.: 15EDGKNHB-3.5-C01		
DRFT: HuangSh 2017.11.15	REV	D0-4	
⊕	SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE