
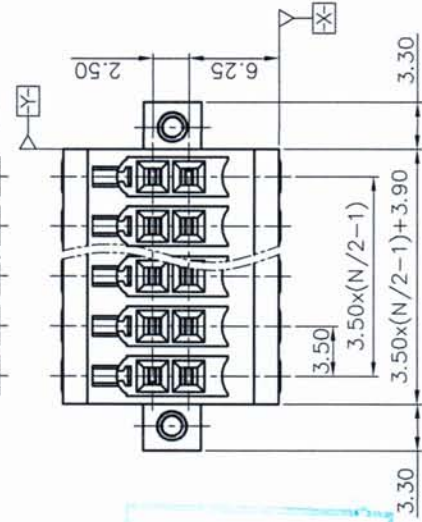
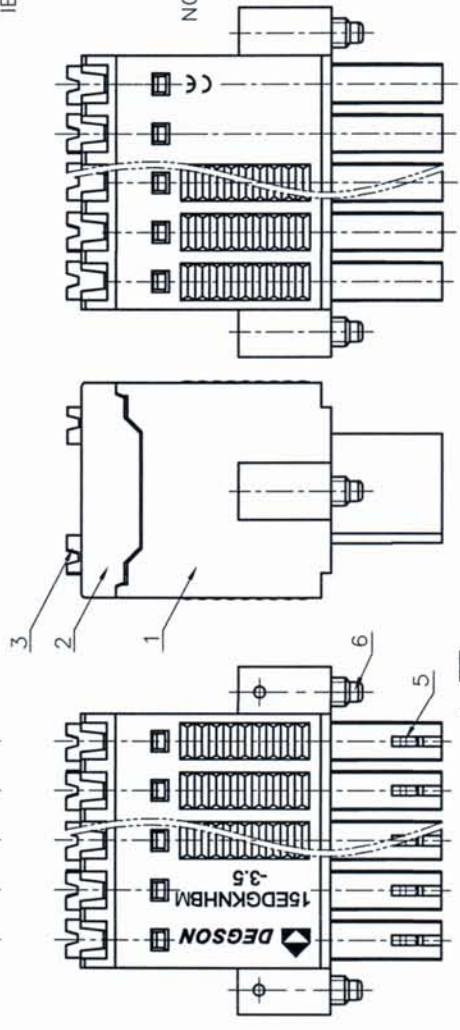
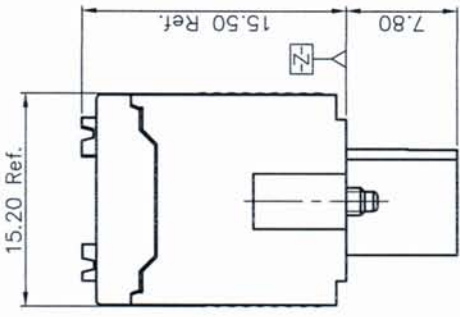


REVISION RECORD	
REV	ECN
DESCRIPTION	DRFT
DATE	

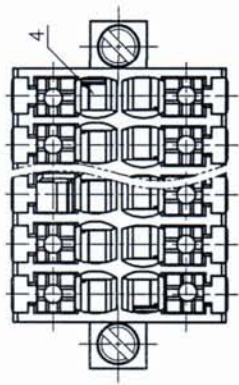

NOTES1:

- UL Standard
- Rated voltage/current : 150V / 9.5A
- Withstanding voltage : AC1300V/1Min.
- Wire range : 28~16AWG

IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	160V	160V
Rate current(A)			13.4A


NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 3.50mm, Poles : N=04~48P
- Stripping length : 10~11mm
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch range in mm		Nominal dimension range	
Over	Over	Over	Over
6	10	30	60
10	TO	TO	TO
TO	6	30	60
		60	100
		100	150
		150	±2'

6.RoHS Compliance

2017.03.31

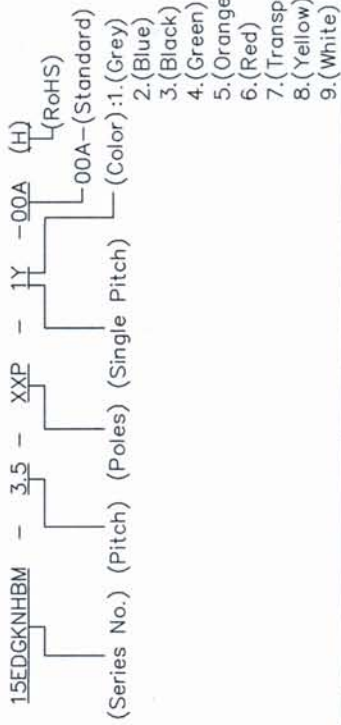

DETACHED LIST

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	Ni Plated
5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PART NO.:		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: 2017.03.31		NAME: 15EDGKNHBM-3.5-XXP-1Y-00A(H)	
CHKD: 2017.03.31		TITLE: CUSTOMER DRAWING	
DRFT: Lee 2017.03.30		DRAWING NO.: 15EDGKNHBM-3.5-C01	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	
		REV DO-1	
		SHEET 1/1	
		SCALE 1:1	