



未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°


A

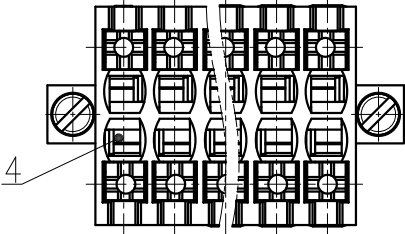



B

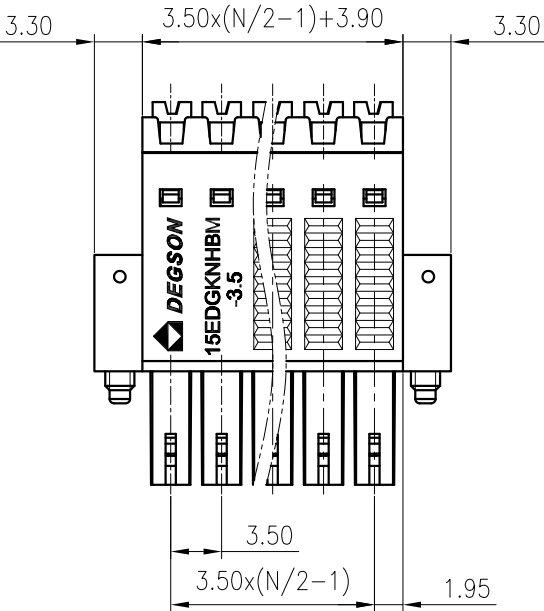

C

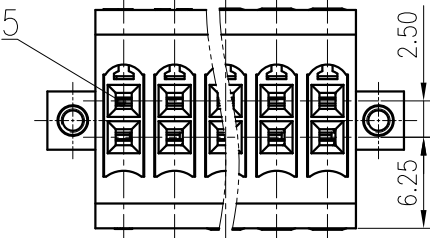

D

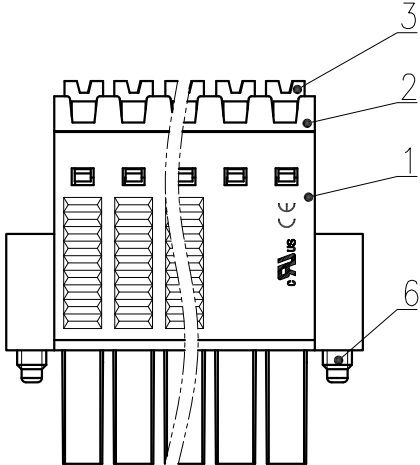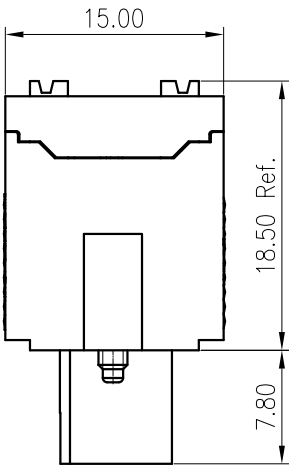

A

B

C

D

6	Screw	Steel	Zn Plated
5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66-GF	UL94V-0
2	Cover	PA66-GF	UL94V-0
1	Housing	PA66-GF	UL94V-0
ITEM	PART NAME	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	50/10	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		160/13.4	160/13.4	320/13.4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~1.5/28~16		
间距/Pitch(mm)/线数范围/Poles		3.50/N=04~48P		
剥线长度/Stripping length(mm)		10~11		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.06.04		NAME: 15EDGKNHBM-3.5-XXP-1Y-00A(H)	
CHKD: Ma EK 2020.06.04			
DRFT: Lee 2017.03.30		DRAWING NO.:15EDGKNHBM-3.5-C01	
 SIZE: A4		REV D0-4	
 TYPE: CUSTOMER DRAWING		SCALE: 2:1 SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------