
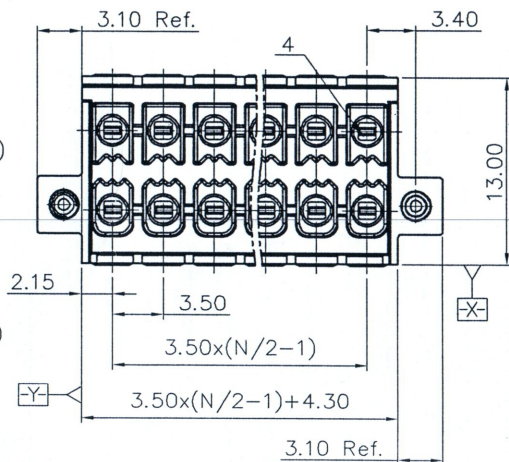

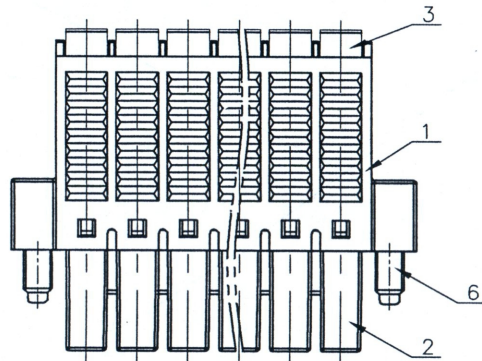
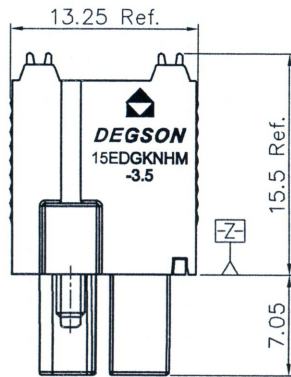


仅供参考图  
蓝贵凡  
2018.09.13

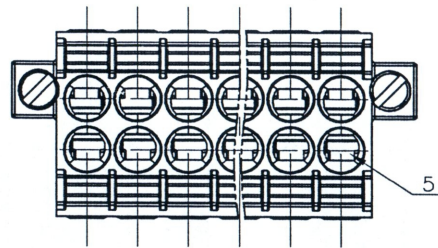

(TO-3)  
15EDGKNHM - 3.5 - XXP - 1Y - 00A (H)  
(Series No.) (Pitch)(Poles) (RoHS)  
00A-(Standard)  
(Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)  
(Single Pitch)

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
T0-2	17-0164	1.add VDE mark 2.modify rate current	Ethan	2017.06.26
T0-3		Modify rate voltage Add name description	GWG	2018.03.06

NOTES1:

- UL Standard (TO-3)  
1.Rated Voltage/Current : 300V / 8A  
2.Withstanding Voltage : AC1600V/1Min.  
3.Wire Range : 26~16AWG

IEC Standard

1. Pollution Degree	2	2	3
Overtoltage Category	II	III	III
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	320V	250V	200V
Rate Current(A)	9.5A		

2. Wire Range : 0.2~1.5mm<sup>2</sup> (TO-2)

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009  
2.Pitch : 3.50mm, Poles : N=04~48P  
3.Stripping length : 10.0mm  
4.Operating temperature : -40°C~+105°C  
5.Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm				0.1/10
To	Over 6 To 10	Over 10 To 24	Over 30 To 60	Over 60 To 150	
±0.15	±0.20	±0.30	±0.50	±1.00	±2°

- 6.RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	M2/Zn Plated
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alan 2018.09.13	NAME:	15EDGKNHM-3.5-XXP-1Y-00A(H)	
	CHKD: Alan 2018.09.13	TITLE:	CUSTOMER DRAWING	REV T0-3
	DRFT: Ethan 2016.09.09	DRAWING NO.:	15EDGKNHM-3.5-C01	SHEET 1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1