



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

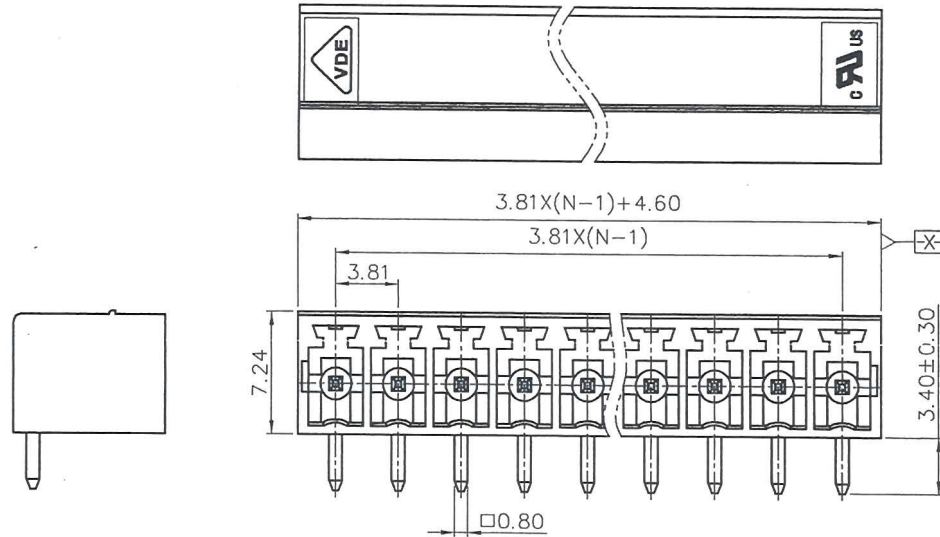

NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 300V / 8A
- 2. Withstanding Voltage : AC1600V/1Min.
- VDE Standard




1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.81mm, Poles : N=2~24P
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm				0.1/10			
	TO 6	Over 6 TO 10	Over 10 TO 24	Over 24 TO 150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

- 5. RoHS Compliance

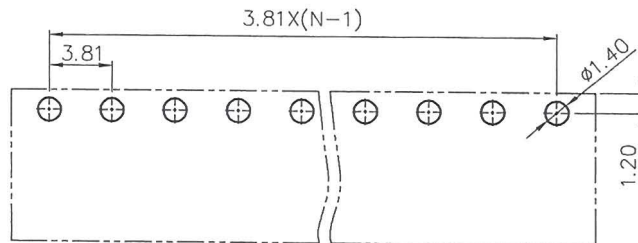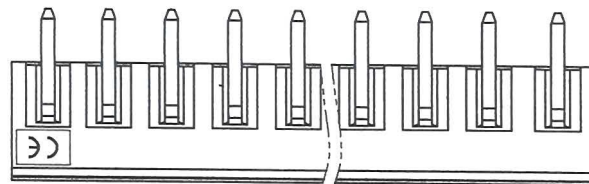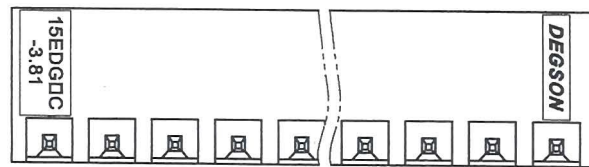

文管中心
研发专用
2016.3.08
内部使用,对外无效

2	PIN	Copper Alloy	Sn Plated
1	HOUSING	PA66	UL94v-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.: Series 15EDGRC-3.81	宁波高松电子有限公司 DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Aaron 11/17/15	NAME: 15EDGRC-3.81-XXP-1Y-00A(H)		
	CHKD: X 11/17/15	TITLE: CUSTOMER DRAWING		
	DRFT: Yz 10/26/15"	REV	TO	
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGRC-3.81-C02	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1