

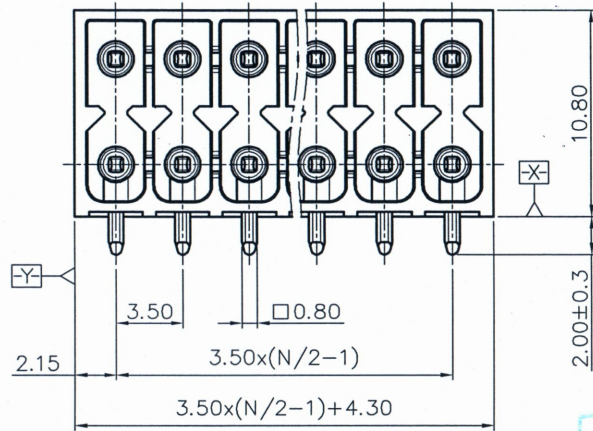
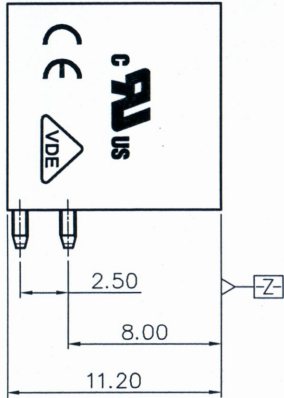


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

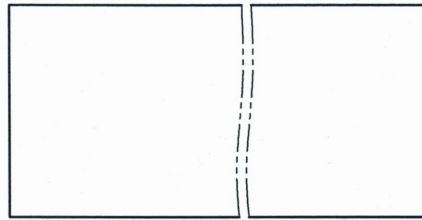

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 8A
2. Withstanding voltage : AC1500V/1Min.

IEC Standard


1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	250V	160V	160V
Rate current(A)	8A		

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=04~48P
3. Operating temperature: -40°C~+130°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				0.1/10
TO	Over TO	TO	Over TO	Over TO		
6	10	10	30	60	100	150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30

5. RoHS Compliance

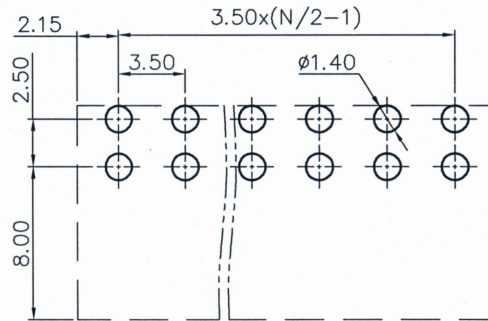

PCB LAYOUT

仅供参考图
 签字: 劳利 利
 日期: 2018.07.03

15EDGRHC - THR - 3.5 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 3.(Black) 5.(Orange)
 (Through holes Reflow) (RoHS) 00A-(Standard)

4	Long Pin	Copper alloy	Sn Plated
3	Short Pin	Copper alloy	Sn Plated
2	Patch	LCP	UL94V-0
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Robin 2018-07-03	NAME: 15EDGRHC-THR-3.5-XXP-1Y-00A(H)		
	CHKD: J	TITLE: CUSTOMER DRAWING		
	DRFT: CMZ 2018.07.03	REV: D0-1	DRAWING NO.: 15EDGRHC-THR-3.5-C01	
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET 1/1
		SCALE	1:1	