

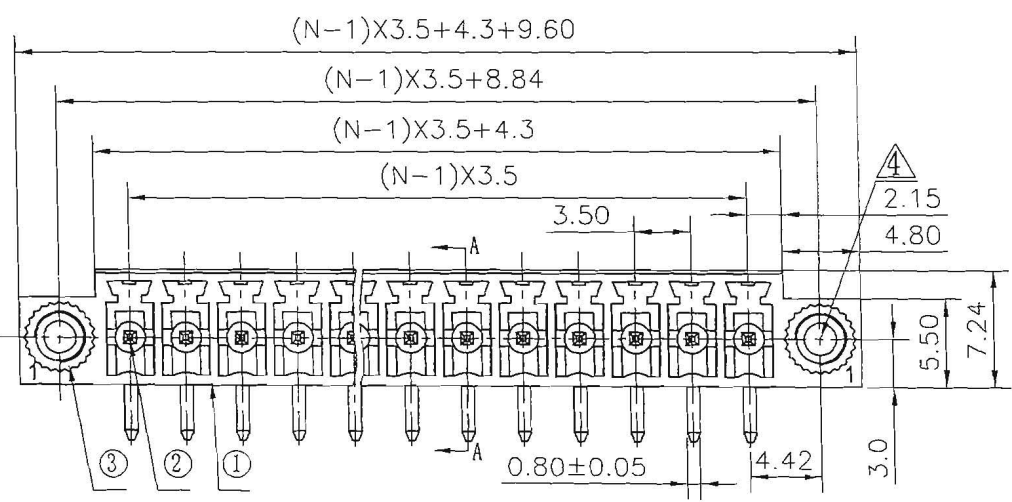
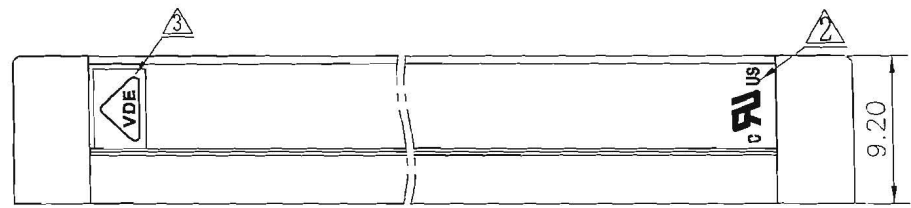


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△1		Drawing emend	Home	04/07/06
△2		增加商标、品名、UL刻字	WLM	08/06/08
△3		增加VDE, CE刻字	Zengy	01/15/09
△4	11-0088	修改螺帽孔结构, 变更料号	YHG	04/25/11
△5		整理图面	ZMT	01/15/13

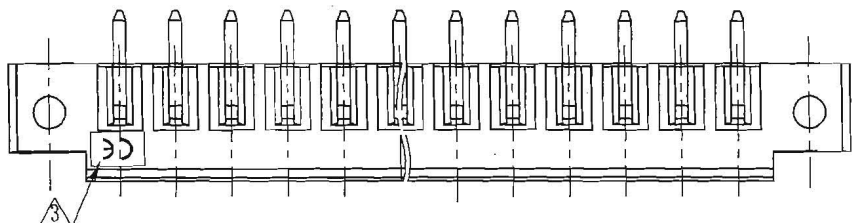


- Notes:
- Pitch: 3.5mm poles: 2-24p
 - Rated voltage/current: UL 300V/8A
VDE 250V/7A
 - Operation temperatures: -40° C ~ +105° C
 - Withstanding voltage: AC2000V/1min
 - Insulation resistance: 5000MΩ/DC1000V
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	to	over	to	over	to	
6	10	30	60	100	150	∅	
6	10	24	30	60	150	□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	
						±1.0	
						0.05/10	



文管中心
 研发专用
 2014.07.21
 (仅限内部使用, 对外无效)

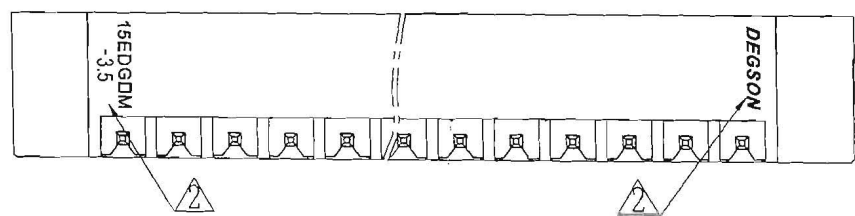

3	2EDG-screw cap	S000001040(H)	2	brass	
2	15EDGRC Pin header	1003B00010(H)	XX	brass	SnCe

1	15EDGVM-3.5 Housing	1040A0YXXC(H)△	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) CHKD NFO DATE 01/24/05 APPV. DATE 01/23/13 DATE 01/22/13 MATERIAL: Series 15EDGRM-3.5 G.E.: FINISH: SCALE: 1:1 THIRD ANGLE PROJECTION		NAME: 15EDGRM-3.5-XXP-1Y-00A(H) DRAWING NO. 15EDGRM-3.5-E01 SHEET 1 OF 1			
TOLERANCES EXCEPT AS NOTED .00 ± .000 ± ANGLES ± 1°		宁波高正电子有限公司 Ningbo Degson Electrical Co., Ltd. SIZE A3 REV T5 01/15/13			