


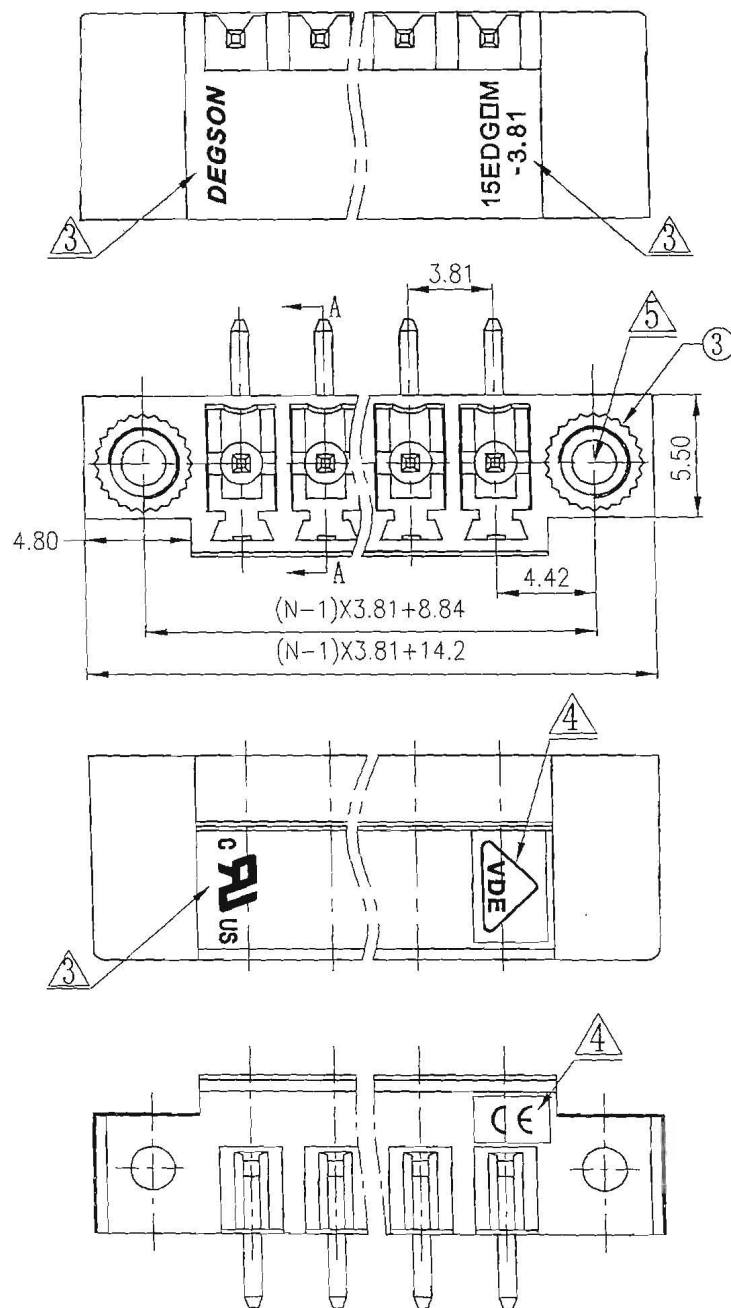


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing emend	WF	04/07/06
2		增加商标、品名、U刻字	WLM	08/06/08
3		增加VDE, CE刻字	Zengy	01/15/09
4	11-0119	修改螺帽孔结构, 变更料号	YHG	05/16/11
5		整理图面	ZMT	01/15/13

Notes:

1. Pitch: 3.81mm poles: 2-24p
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Withstanding voltage: AC2000V/1min
5. Insulation resistance: 5000M Ω /DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to	over	to	to	over	over	over	
6	6	10	30	30	60	100	150
to	to	to	to	to	to	to	to
6	10	24	30	60	100	150	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0



3	2EDG screw cap	S000001040(H)	2	Brass	
2	15EDGRC Pin header	1003B00010(H)	XX	Brass	SnCe
1	15EDGV (R) M-3.81-Housing	1004A0YXXC(H)	I	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTO DZJ CHKD MFO DATE 09/14/05 DATE 01/24/13 DATE 01/23/13 APPR. Alan MATERIAL: G.E. Series 15EDGRM-3.81 FINISH: SCALE: 1:1 NAME 15EDGRM-3.81-XXP-1Y-00A(H) DRAWING NO. 15EDGRM-3.81-E02 SIZE A3 REV T6 01/15/13 NINGBO DEGSON ELECTRICAL CO., LTD DO NOT SCALE DRAWING SHEET 1 OF 1					