

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 8A
- 2.Withstanding Voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.81mm, Poles : N=02~20P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned Tolerances:






Pitch Range In mm		Nominal Dimension Range In mm		
TO	Over	TO	Over	
6	6 TO 10	10	30 TO 60	0.1/10
	10 TO 24	60	100 TO 150	
		±0.15	±0.20	±0.30
		±0.30	±0.50	±0.70
		±0.70	±1.00	±1.30
				±2°

5.RoHS Compliance

15EDGRMG - 3.81 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

(RoHS)
 00A-(Standard)

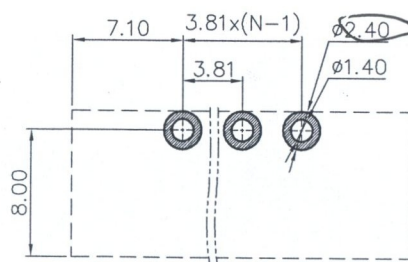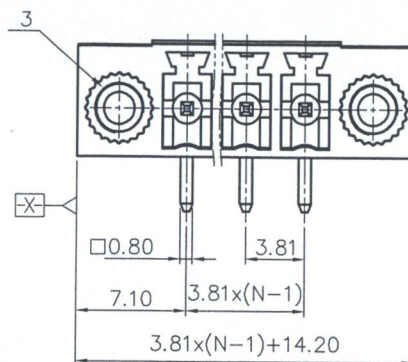

PCB LAYOUT

ITEM	NAME OF PART	MATERIAL	NOTES
3	Nut	Copper alloy	/
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

PART NO.: /	宁波高松电子有限公司 NINGBO DEGSO ELECTRICAL CO., LTD		
APPD: 2018.09.12	NAME: 15EDGRMG-3.81-XXP-1Y-00A(H)		
CHKD:	TITLE: CUSTOMER DRAWING		
DRFT: Ethan 2016.11.11	DRAWING NO.: 15EDGRMG-3.81-C01		REV DO-1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET 1/1
		SCALE	1:1

仅供参考图

签字: 董贵平

日期: 2018.09.12