
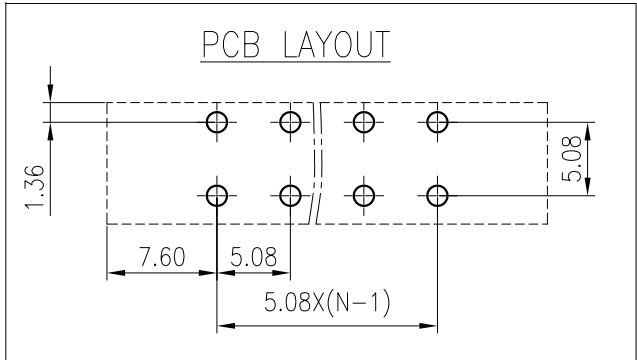
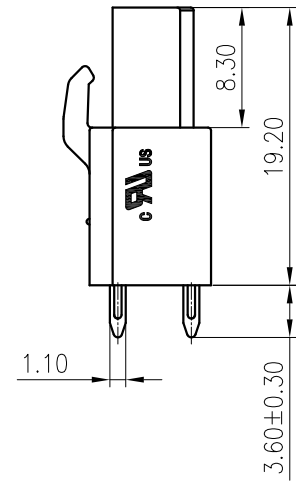
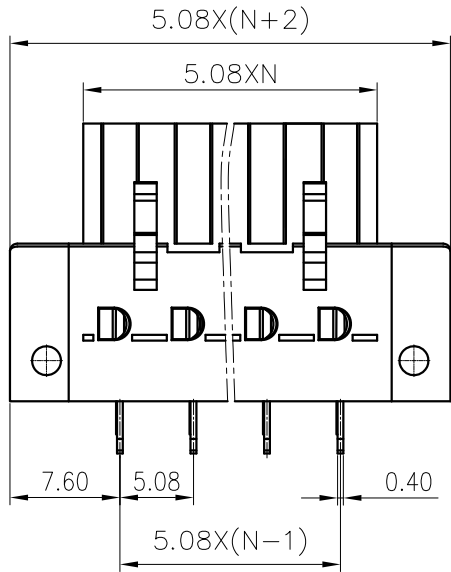


未注公差/General tolerances(mm)												0.1/10 ±2°	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL 标准/UL Standard:											B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)											300/15 / / 300/10		
IEC 标准/IEC Standard:													
过压类别/Overvoltage Category/污染等级/Pollution Degree											III/3 III/2 II/2		
额定电压/电流/Rated Voltage(V)/Current(A)											/ 320/20 /		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)											/ 4 /		
间距/Pitch(mm)/线数范围/Poles											5.08/N=02~24P		
使用温度范围/Operating temperature(°C)											-40~+105		
符合RoHS环保要求/Conform to RoHS											Yes		
标准颜色编号/Standard color number:											/		
PANTONE / RAL											/		

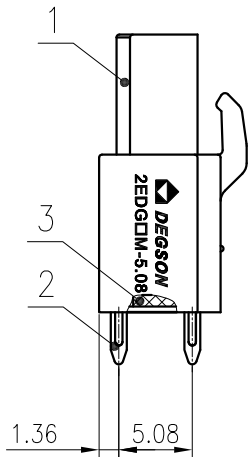

4	Nut	Copper alloy	
3	Cover	PA66	UL94V-0
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL: /		SURFACE: /	
MAT NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: LiGL 2020.06.17			
CHKD: MaoJ 2020.06.17			
DRFT: WangY2 2020.06.17		NAME: 2EDGBM-5.08-XXP-14-00A(H)	
DRAWING NO.: 2EDGBM-5.08-C01		REV	T1
TYPE: CUSTOMER DRAWING		SCALE: 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------