


| REVISION RECORD | | | | |
|-----------------|---------|---------------|------|----------|
| REV | ECD | DESCRIPTION | DRFT | DATE |
| △ | | Drawing emend | WF | 01/06/06 |
| △ | | 增加VDE、CE认证标志 | LJH | 01/14/08 |
| △ | 12-0216 | 关于电视由硬锡改为锡铜 | HXG | 01/05/13 |

- Notes:
- Pitch: 7.50mm Poles:2-12p
 - Rated voltage/current:UL 300V/15A
VDE 400V/20A
 - Insulation resistance: 5000MΩ/DC1000V
 - Withstanding voltage: AC2500V/1Min
 - Wire range: 28-12AWG 2.5mm²
 - Temp. Range: -40° C~+105° C
 - Torque: M2.5 4.08kgf.cm(3.61b.in)
 - Undimensioned Tolerances:

| Pitch range in mm | | Nominal dimension range in mm | | | | | |
|-------------------|-------|-------------------------------|------|------|------|------|------|
| to | over | to | over | to | over | to | over |
| 6 | 10 | 10 | 30 | 60 | 100 | 150 | 200 |
| 6 | 10 | 24 | 30 | 60 | 100 | 150 | 200 |
| ±0.10 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 |

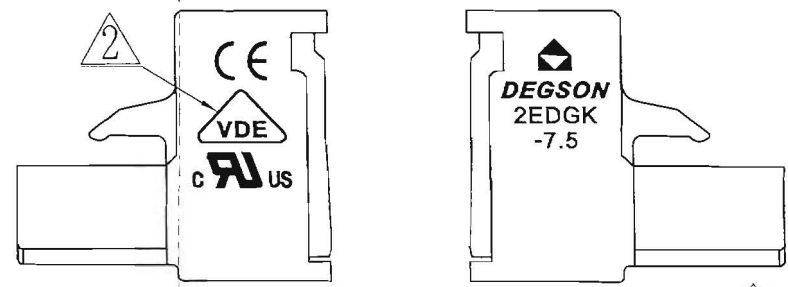

| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTES |
|------|---------------------|---------------|------|----------------|---------------------|
| 5 | 2EDG Clamp | 1005B00010(H) | XX | Phospor bronze | Sn plated |
| 4 | OG128 Brass Cage | X000000020(H) | XX | Brass | Ni plated |
| 3 | 2EDG "—"Screws-M2.5 | S000001370(H) | XX | Steel | Cr ³⁺ Zn |
| 2 | 2EDGK-7.5-Cover | 1017C0YXXA(H) | 1 | PA66 | UL94V-0 |

| | | | | | |
|--|-------------------|---------------|--|------|---------|
| 1 | 2EDGK-7.5-Housing | 1017A0YXXA(H) | 1 | PA66 | UL94V-0 |
| DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: 2EDGK-7.5-XXP-1Y-00A(H) DRAWING NO. 2EDGK-7.5-E02 /PART NO. | | | | | |
| TOLERANCES EXCEPT AS NOTED MM (INCH) .00 ± .00 ± .000 ± | | | DFTO Haoyh DATE 10/07/05 CHKD DATE 01/10/13 MFO DATE APPVL DATE Alan 01/12/13 MATERIAL: | | |
| ANGLES ± 1° THIRD ANGLE PROJECTION | | | G.E.: FINISH: SCALE: 1:1 DO NOT SCALE DRAWING | | |
| SHEET 1 | | | | OF 1 | |

