


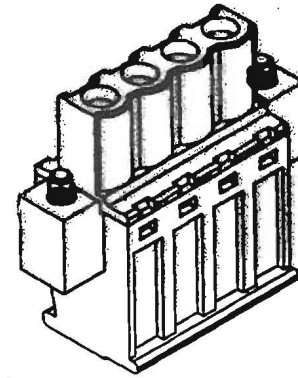
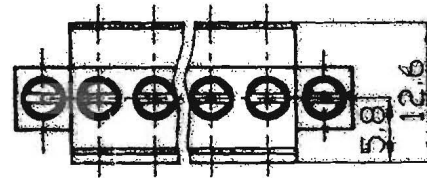



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
▲		Drawing amend	CSX	04/18/06
▲		工程变更	CSX	11/30/06
▲		增加UL刻字	CSX	04/05/07
▲		品名、料号增加环保标示“06”	LJH	12/11/07
▲		增加VDE, CE刻字	WLM	02/12/09
▲		更新图纸	COCO	05/05/10
▲	130104	打防脱点	DXJ	08/07/13

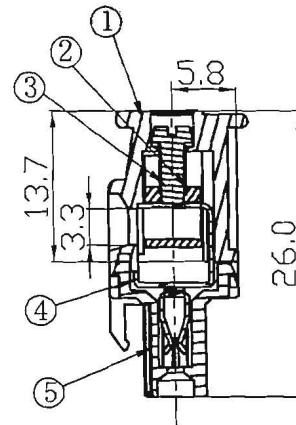

Drill hole(打防脱点)
(Max $\phi 0.8 \times 0.5\text{mm}$)*2

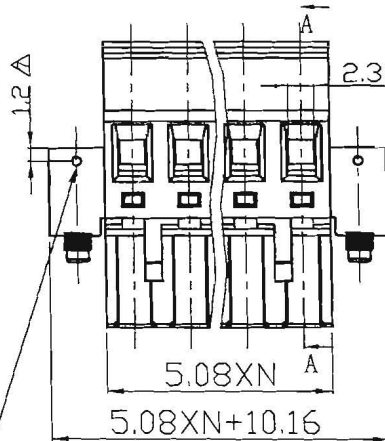


SECTION A-A



Notes:

- Pitch: 5.08mm, Poles: 2-22P
- Rated voltage/current: UL 300V/15A
VDE 320V/10A
- Operation temperatures: $-45^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: $5000\text{M}\Omega / \text{DC1000V}$
- Wire Range: 28~12AWG, 2.5mm²
- Max. Torque Value: M2.5, 4.08kgf.cm
- Undimensioned Tolerances:

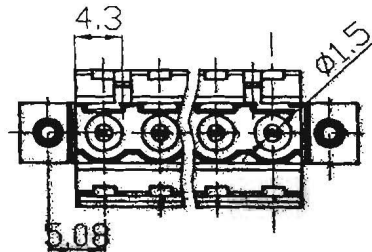

Pitch range in mm		Nominal dimension range in mm				
to	6	to	30	60	100	150
6	10	24	30	60	100	150
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7
					± 1.0	± 0.005

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	2EDGKA/B-5.08 COVER	1028COVXXA(H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010(H)	XX	Phosphor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980(H)	XX*2	Steel	C ² Zn
2	DG128 CAGE	X000000020(H)	XX	Brass	Ni plated

1	2EDGKAM/MS-5.08 HOUSING	1029A0VXXA(G)	1	PA66	UL94V-0
NAME: 2EDGKAM-5.08-XXP-1Y-00A(H)					
DRAWING NO. 2EDGKAM-5.08-E01					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					