


未注公差/General tolerances(mm)										0.1/10 ±2'			
0	>3	>6	>10	>18	>30	>50	>80	>120	>180		>250	>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

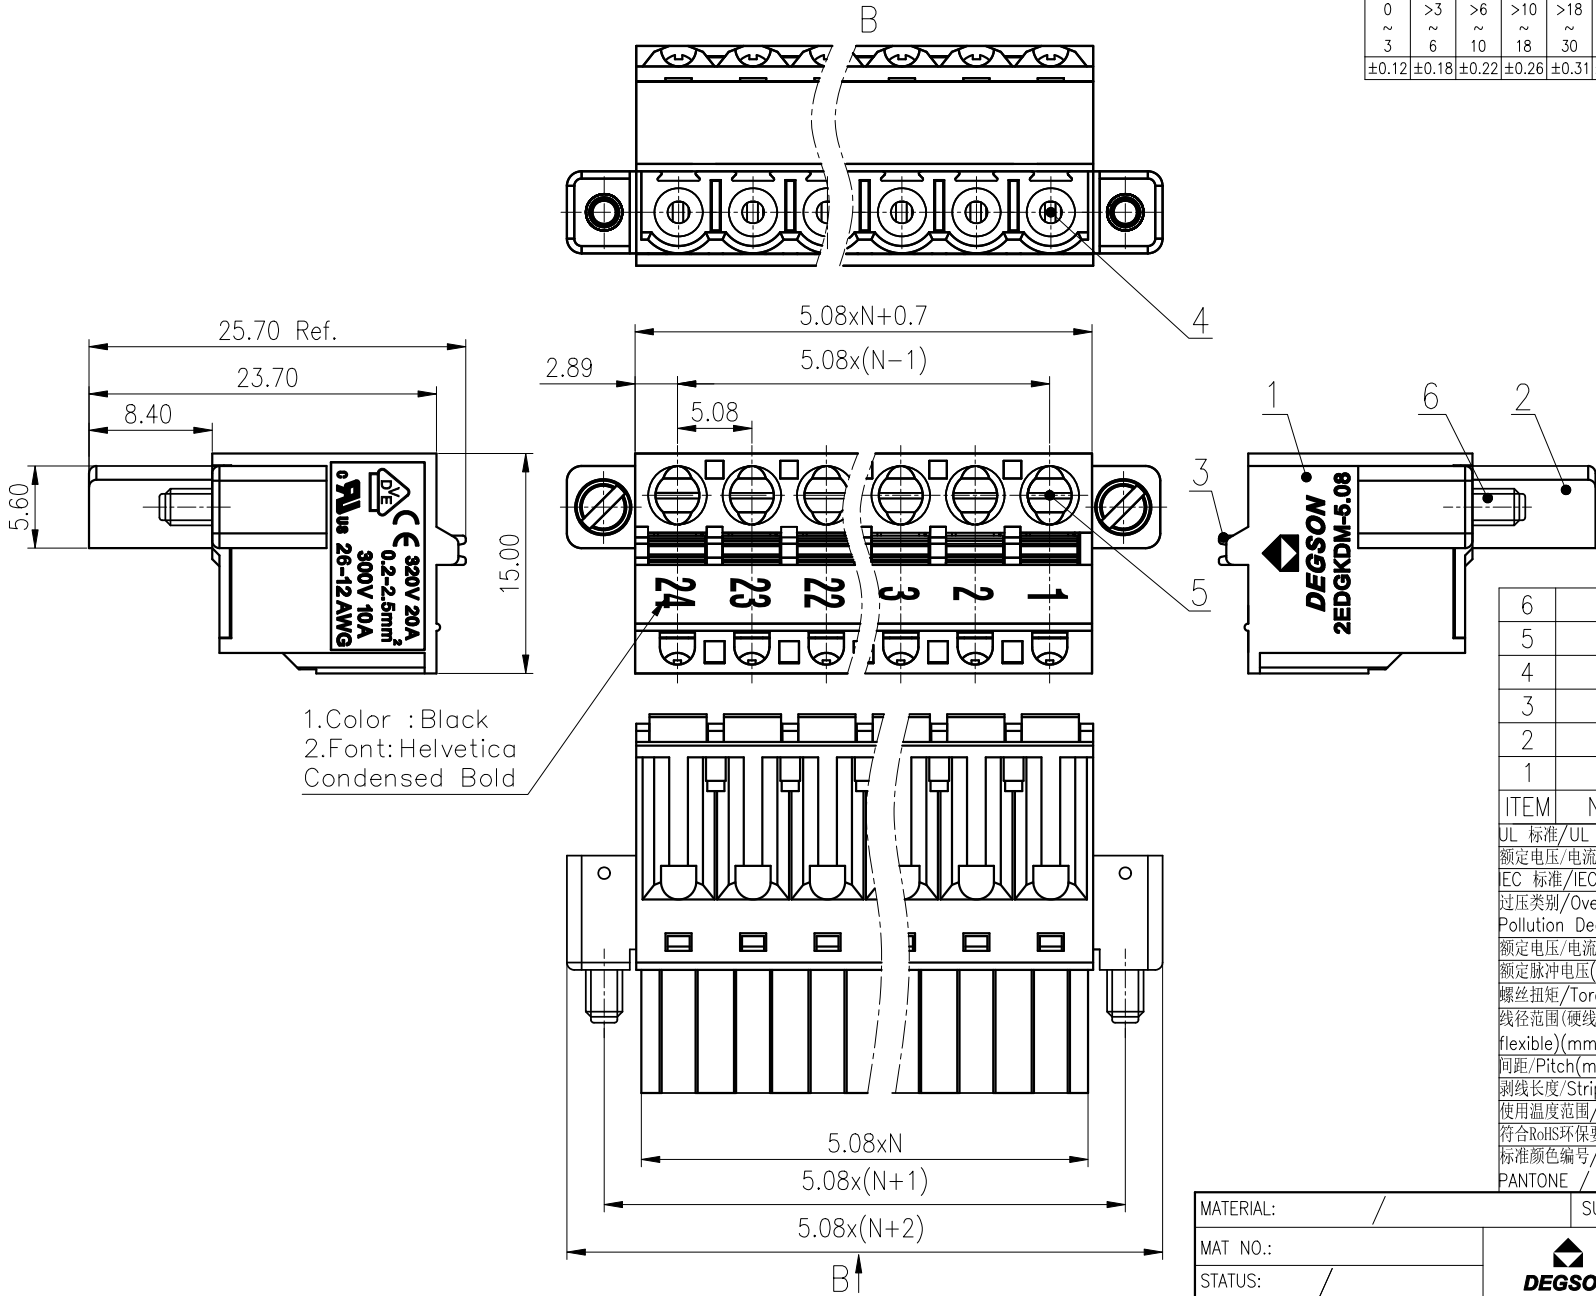

1. Color : Black
2. Font: Helvetica Condensed Bold

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	M2.5/Zn Plated
5	Spring	Stainless steel	
4	Clamp	Copper Alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/2		
额定电压/电流/Rated Voltage(V)/Current(A)		320/20		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~2.5/26~12		
间距/Pitch(mm)/线数范围/Poles		5.08/N=2~24P		
剥线长度/Stripping length(mm)		9-10		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

MATERIAL:	/	SURFACE:	/
MAT NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		NAME: 2EDGKDM-5.08-XXP-1Y-38A(H)	
CHKD: Zhang YH 20220920		DRAWING NO.:	10006309
DRFT: Chen DH20220920		REV	D0-2
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交还本文件的内容。侵犯本文件的内容，侵犯者将负法律责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。

REV	ECN	DESCRIPTION	DRFT	DATE