


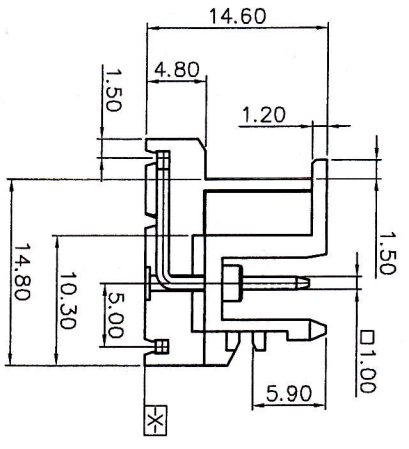
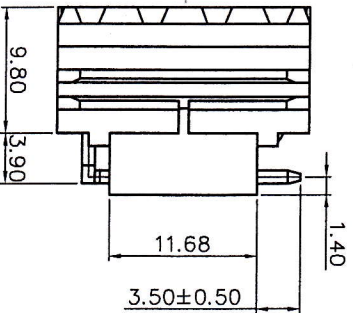


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE
△		品名、料号增加环保标志“(H)”	LJH 12/11/07
△	10-0017	增加UI刻字	YHG 03/21/11
△	14-0102	增加VDE刻字,修改料号	DZ 05/20/14

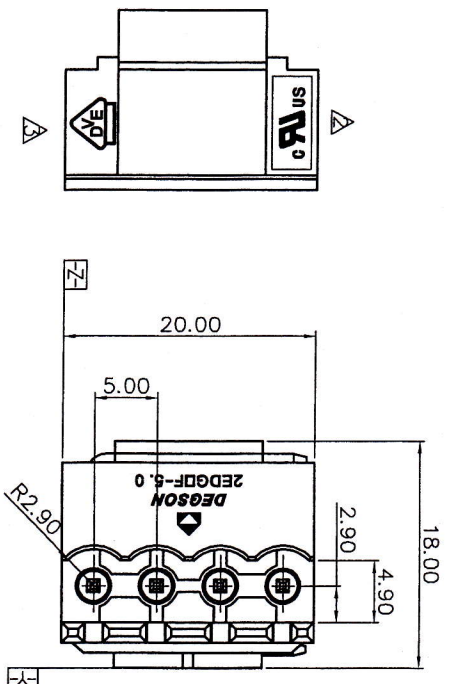

- NOTES:
- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
 - 2.PITCH:5.0MM ,POLES:04P
 - 3.RATED VOLTAGE/CURRENT: UL 300V/15A VDE 320V/20A
 - 4.OPERATION TEMPERATURES: -40℃~+105℃
 - 5.RATED IMPULSE VOLTAGE: 4.0KV
 - 6.INSULATION RESISTANCE: 5000M Ω/DC1000V
 - 7.UNDIMENSIONED TOLERANCES:

PITCH RANGE		NOMINAL DIMENSION RANGE	
IN MM	OVER	IN MM	OVER
TO 6	TO 10	TO 30	TO 60
TO 6	TO 24	TO 30	TO 100
±0.10	±0.15	±0.25	±0.30
			±0.50
			±0.70
			±1.00
			±0.05/10

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	2EDGRF-5.0-04P-Housing	1	1	PA66	UL94V-0
2	2EDGLF-5.0 pin3	1	1	Copper	TIN PLATED
3	2EDGRF-5.0 pin1	1	1	Copper	TIN PLATED
4	2EDGLF-5.0 pin2	1	1	Copper	TIN PLATED
5	2EDGLF-5.0 pin4	1	1	Copper	TIN PLATED

DETACHED LISTS	
FINISH:	FINISH:
TOLERANCES EXCEPT AS NOTED	TOLERANCES EXCEPT AS NOTED
XXX ±	XXX ±
.XX ±	.XX ±
X ±	X ±
ANGLES ± 1°	ANGLES ± 1°
THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION

NAME: **DEGSON** 宁波高正电子有限公司
 DEGSON ELECTRONICS CO., LTD

2EDGLF-5.0-04P-1Y-00A(H)

ASSEMBLY DRAWING

DRAWING NO.: 2EDGLF-5.0-E04

SCALE: 1:1

REV: T3

SHEET: 1/1

DATE: 2014.6.07

文管中心