
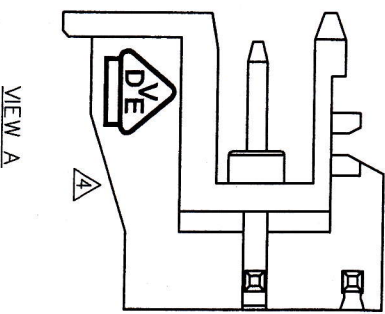
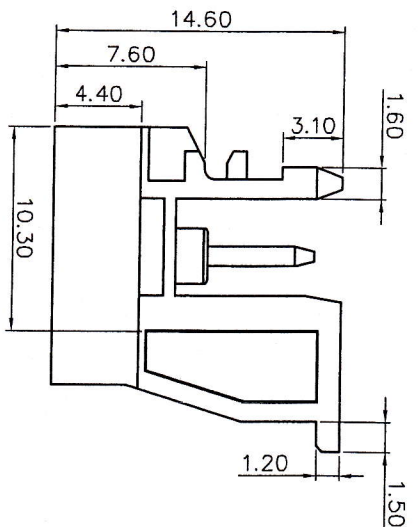
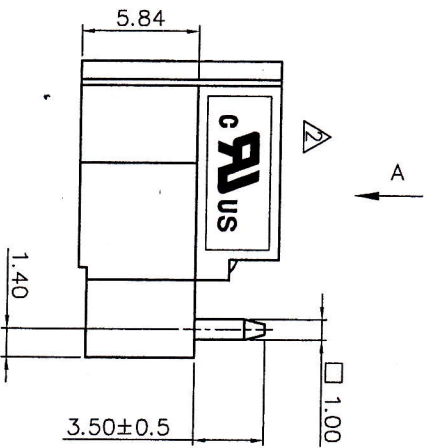
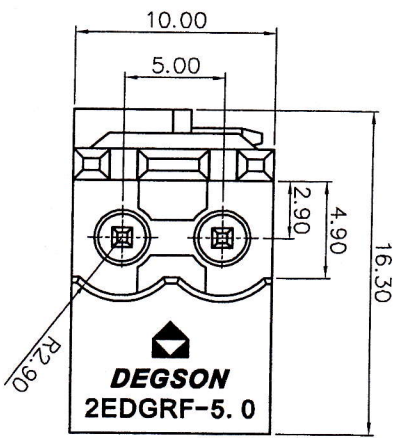




REVISION RECORD			
REV	ECN	DESCRIPTION	DATE
Δ		品名、料号增加环保标示'10'	12/11/07*
Δ	10-0017	增加UL标示	Jordan, 102/11/10*
Δ	12-0015	更新封面	Dick, H 02/11/12*
Δ	14-0102	增加VDE标示, 更改针料号	XL.M 05/20/14*

- NOTES:
- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
 - 2.PITCH: 5.0MM ,POLES: 02P
 - 3.RATED VOLTAGE/CURRENT: UL 300V/15A
VDE 320V/20A
 - 4.OPERATION TEMPERATURES: -40℃~+105℃
 - 5.RATED IMPULSE VOLTAGE: 4.0KV
 - 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
 - 7.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM		
TO 6	OVER 10	TO 30	OVER 60	TO 100
TO 10	TO 24	TO 30	TO 60	TO 100
±0.10±0.15	±0.25±0.20	±0.30±0.50	±0.70±1.00	±0.05/10



ITEM	NAME OF PART	NO. OF PART	Q'TY MATERIAL	NOTES
3	2EDGRF-5.0 pin1	1	Copper	TIN PLATED
2	2EDGLF-5.0 pin2	1	Copper	TIN PLATED
1	2EDGRF-5.0-02P-Housing	1	PA66	UL94V-0

DETACHED LISTS

ANGLES ± 1°

THIRD ANGLE PROJECTION

APPRO: *John Schilling*

CHKD: *Anton 5/21/14*

DRT: Yangys 05/07/07

DO NOT SCALE DRAWING

SCALE N/A

SHEET 1/1

REV T4

NAME: **DEGSON** 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

TITLE: ASSEMBLY DRAWING

DRAWING NO.: 2EDGRF-5.0-E01

2EDGRF-5.0-02P-1Y-00A(H)