





未注公差/General tolerances(mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

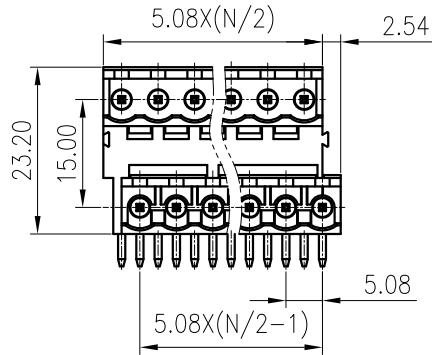


文 管 中 心  
研 发 专 用  
  
2020.06.01  
  
(仅限内部使用, 对外无效)



4	Short Pin	Copper	Sn Plated
3	Long Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C D
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/ 300/10
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/10 /
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4.0 /
间距/Pitch(mm)/线数范围/Poles		5.08/N=04~48P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

PCB LAYOUT

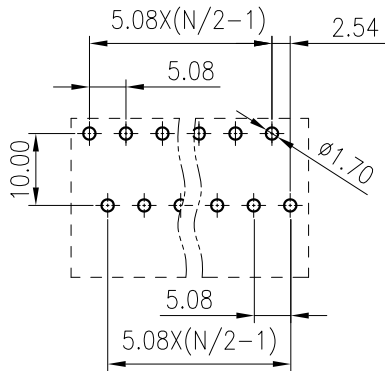

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: LanChH 2020.06.01	NAME: 2EDGRT-5.08-XXP-1Y-00A(H)		
CHKD: GongYzh 2020.06.01	DRAWING NO.: 10002266		REV TO
DRFT: ZhYP 2020.06.01	TYPE: CUSTOMER DRAWING		SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE