


未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50




A

A



B

B

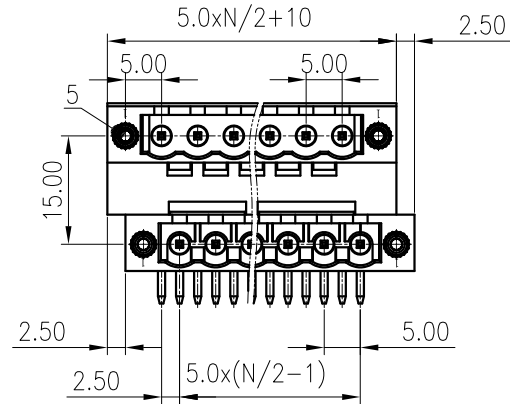

C

C


ITEM	NAME OF PART	MATERIAL	NOTES
5	Nut	Copper alloy	
4	Short Pin	Copper	Sn Plated
3	Long Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/	300/10
VDE 标准/VDE Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/10	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4.0	/
间距/Pitch(mm)		5.08		
整体式/One-block/拼接式/Inter locking		N=04~24P/N=24~48P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

D

D

PCB LAYOUT

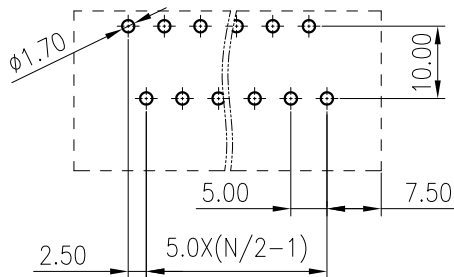

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	LanChH 2020.06.01	NAME:	
CHKD:	GongYzh 2020.06.01	2EDGRTM-5.0-XXP-1Y-00A(H)	
DRFT:	ZhYP 2020.06.01	DRAWING NO.:	10002219
REV	ECN	DESCRIPTION	DRFT
1	2	3	4
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1
		SHEET	1/1