



Headers(Sockets) for pluggable terminal blocks / ECH & EHD series




2EHDR

2EHDR-XXP

2EHDR- series of terminal blocks

XX - number of Positions (number of Pins/Poles)

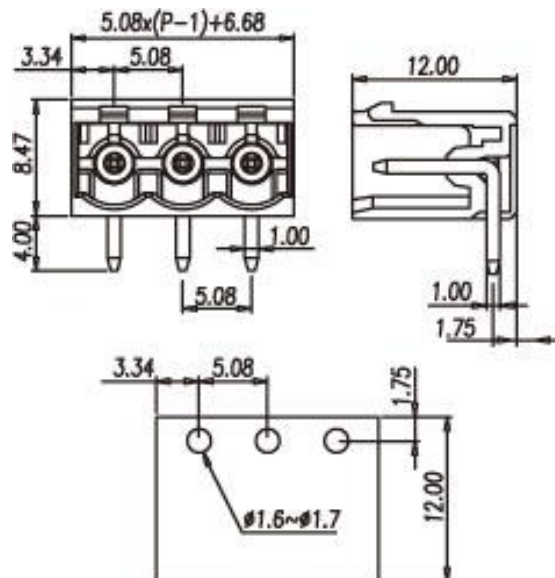

Pitch: 5.08mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	600V
Rated current	15A	18A
Conductor cross-section, solid (AWG/ mm ²)		
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 4 / 4KV	
Torque (N-m)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	2EHDR-02P	
:	:	
:	:	
24	2EHDR-24P	