




## Plugs for pluggable terminal blocks / EC &amp; ESD series



## 2ESDA

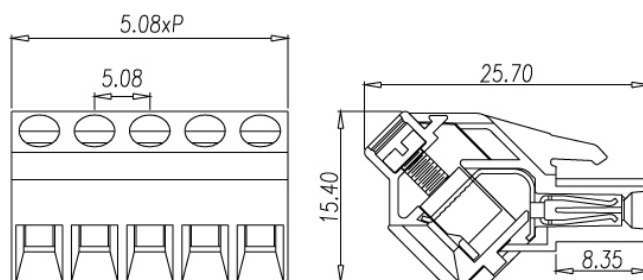

Pitch: 5.08mm

| Approval                                                  |    |      |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Technical Data                                            | UL                                                                                                                                                                                                                                                              | IEC  |
| Rated voltage                                             | 300V                                                                                                                                                                                                                                                            | 600V |
| Rated current                                             | 15A                                                                                                                                                                                                                                                             | 18A  |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    | 28~12 / 0.2~2.5                                                                                                                                                                                                                                                 |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) | 30~12 / 0.2~2.5                                                                                                                                                                                                                                                 |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / 4 / 4 KV                                                                                                                                                                                                                                                  |      |
| Torque (N-m)                                              | 0.51                                                                                                                                                                                                                                                            |      |
| Screw                                                     | M2.5                                                                                                                                                                                                                                                            |      |
| Wire strip length                                         | 7~8mm                                                                                                                                                                                                                                                           |      |
| Pole                                                      | Cat. No.                                                                                                                                                                                                                                                        |      |
| 02                                                        | 2ESDA-02P                                                                                                                                                                                                                                                       |      |
| :                                                         | :                                                                                                                                                                                                                                                               |      |
| :                                                         | :                                                                                                                                                                                                                                                               |      |
| 24                                                        | 2ESDA-24P                                                                                                                                                                                                                                                       |      |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [info@dinkle.com.tw](mailto:info@dinkle.com.tw)