



Plugs for pluggable terminal blocks / EC & ESD series

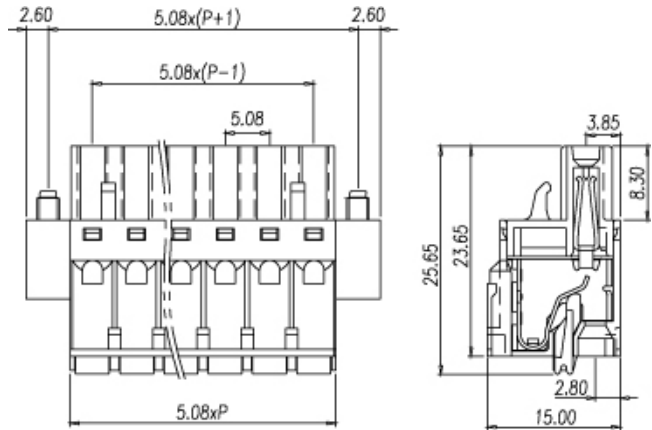

**2ESDSRM**

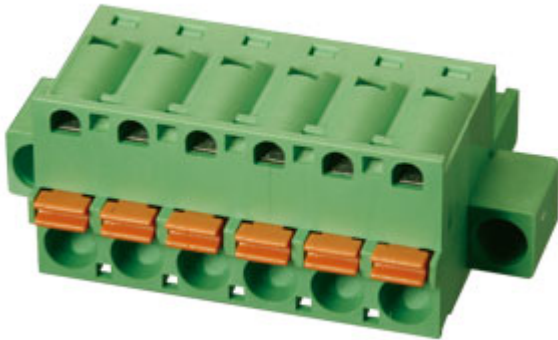

**2ESDSRM-XXP**  
**2ESDSRM** - series of terminal blocks  
**XX** - number of Positions (number of Pins/Poles)

**Pitch: 5.08mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	10A	12A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	26~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	26~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)		
Screw		
Wire strip length	8~9mm	
Pole	Cat. No.	
02	2ESDSRM-02P	
:	:	
:	:	
24	2ESDSRM-24P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw