




Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



5EEHDVM

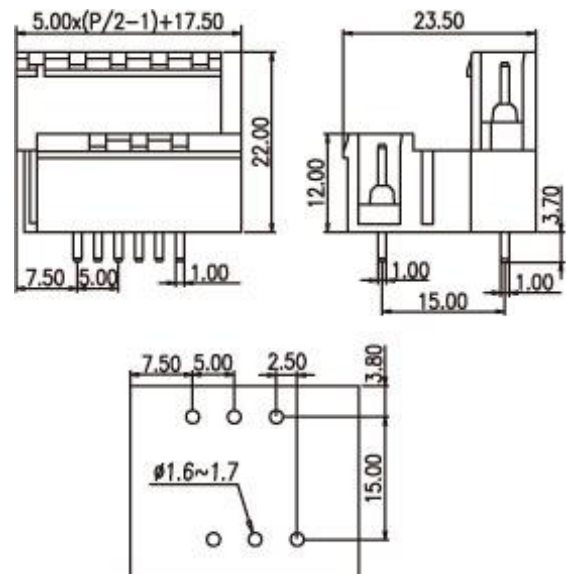

Pitch: 5.00mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	600V
Rated current	15A	18A
Conductor cross-section, solid (AWG/ mm ²)		
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 4 / 4 KV	
Torque (N-m)		
Screw		
Wire strip length		
Pole	Cat. No.	
2x2	5EEHDVM-04P	
:	:	
:	:	
12x2	5EEHDVM-24P	