



Headers(Sockets) for pluggable terminal blocks / ECH & EHD series




5EHDKPM

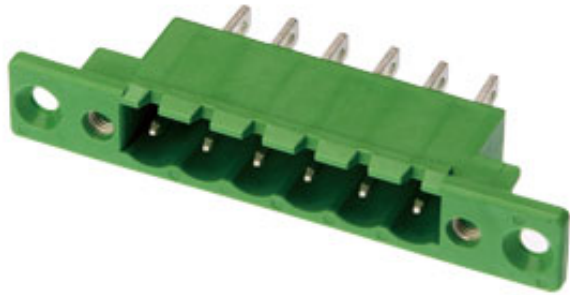

5EHDKPM-XXP
5EHDKPM - series of terminal blocks
XX - number of Positions (number of Pins/Poles)

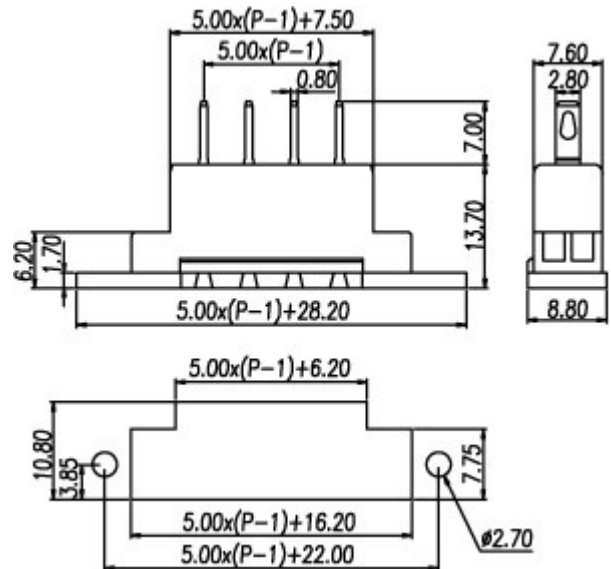

Pitch: 5.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	600V
Rated current	15A	18A
Conductor cross-section, solid (AWG/ mm ²)		
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	5EHDKPM-02P	
:	:	
:	:	
12	5EHDKPM-12P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw