



Plugs for pluggable terminal blocks / EC & ESD series



5ESDSRM

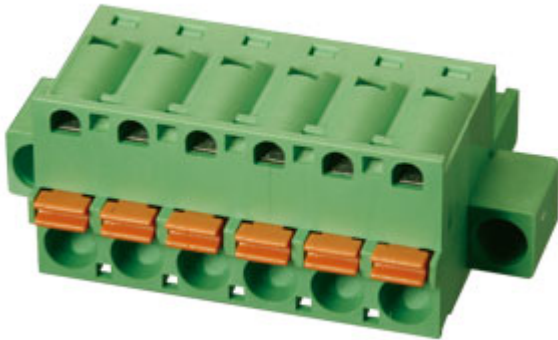

5ESDSRM-XXP
5ESDSRM - series of terminal blocks
XX - number of Positions (number of Pins/Poles)

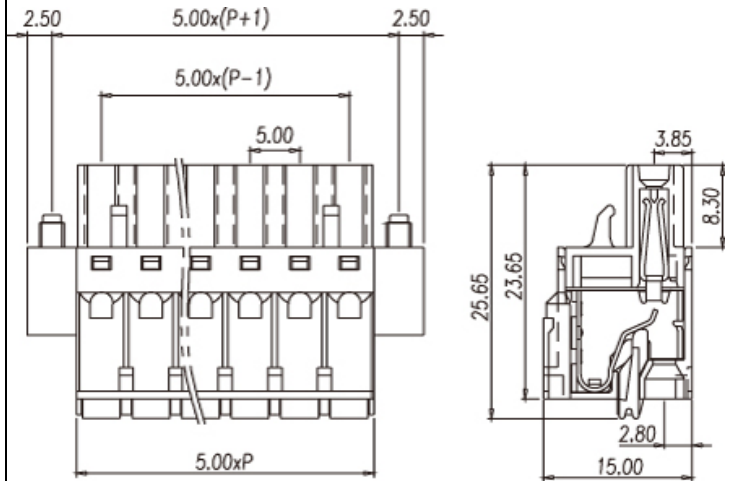

Pitch: 5.00mm

| | | |
|---|-----------------|------|
| Approval | | |
| Technical Data | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 10A | 12A |
| Conductor cross-section, solid (AWG/ mm ²) | 26~12 / 0.5~2.5 | |
| Conductor cross-section, flexible (AWG/ mm ²) | 26~12 / 0.5~2.5 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2 / KV | |
| Torque (N-m) | | |
| Screw | | |
| Wire strip length | 8~9mm | |
| Pole | Cat. No. | |
| 02 | 5ESDSRM-02P | |
| : | : | |
| : | : | |
| 24 | 5ESDSRM-24P | |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw