


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

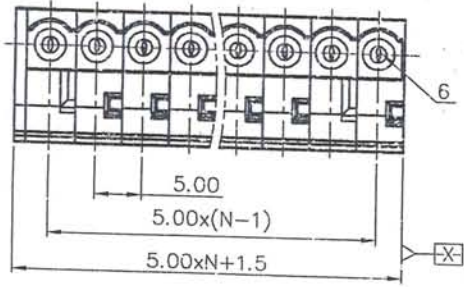

NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 15A
 2. Withstanding voltage : AC1600V/1Min.
 3. Wire range : 22~14AWG
 IEC Standard






1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

2. Wire range : 0.2~2.5mm²

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.00mm, Poles : N=02~24P
 3. Stripping length : 9~10mm
 4. Operating temperature: -40°C~+105°C
 5. Standard color number: PANTONE 428C
 6. Undimensioned tolerances:



Pitch range in mm		Nominal dimension range in mm				0.1/10
TO	TO	TO	TO	TO	TO	
6	10	6	30	60	100	150
6	10	6	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±1.30	±2	±2	±2	±2	±2	±2

7. RoHS Compliance

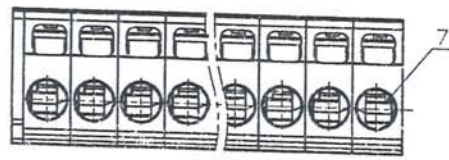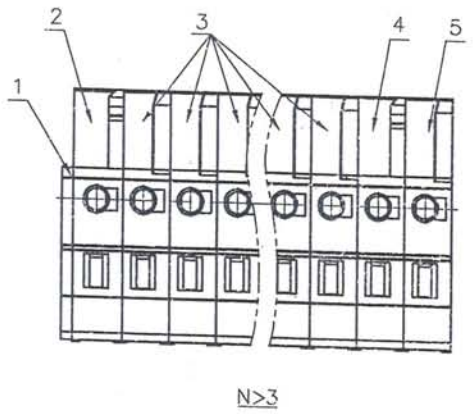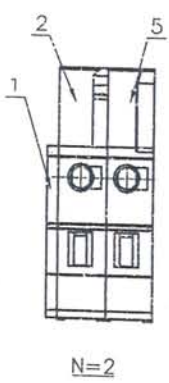

8EDGKB - 5.0 - XXP - 11 - 01A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1 (Grey)
 (RoHS)
 01A-(Customer request)

2017.01.13
 (仅限内部使用,对外无)



ITEM	NAME OF PART	MATERIAL	NOTES
7	Spring	Stainless steel	/
6	Clamp	Copper alloy	Sn plated
5	Housing 4	PA66	UL94V-0
4	Housing 3	PA66	UL94V-0
3	Housing 2	PA66	UL94V-0
2	Housing 1	PA66	UL94V-0
1	Cover	PA66	UL94V-0

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: <i>Frank M/23/16</i>	NAME: 8EDGKB-5.0-XXP-11-01A(H)		
CHKD: <i>Frank 11/22-16"</i>	TITLE: CUSTOMER DRAWING		
DRFT: <i>DG 11/11/16"</i>	DRAWING NO.: 8EDGKB-5.0-C02		REV TO
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING
		SHEET 1/1	SCALE 1:1