







REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△	12-0250	修订图面	JEX	11/29"12
△	14-0217	修改刻字	JEX	07/25"14
△	15-0077	修订技术参数	GYZ	02/28"15

- NOTES:
- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
 - 2.PITCH: 3.5MM POLES: 2-24P
 - △ 3.RATED VOLTAGE/CURRENT: UL1059 300V/10A IEC 130V/10A
 - 4.OPERATION TEMPERATURES: -40℃~+105℃
 - 5.RATED IMPULSE VOLTAGE: 2.5KV
 - 6.WIRE RANGE: 28~14AWG, 0.2~1.5MM²
 - 7.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM					
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER	
6	10	10	30	60	100	150	150	
10	24	24	30	60	100	150	150	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	
							0.05/10	

(仅限内部使用, 对外无效)
2015.03.21
研发专用

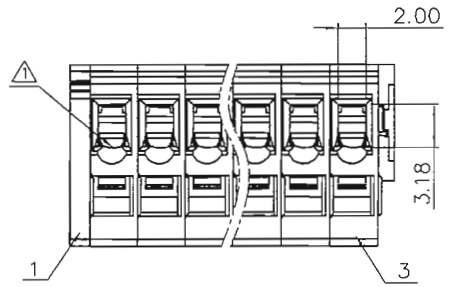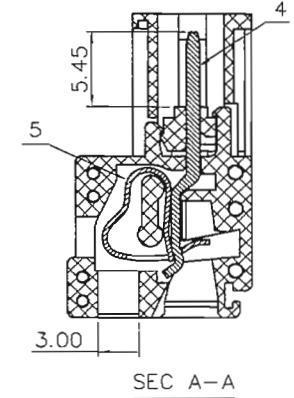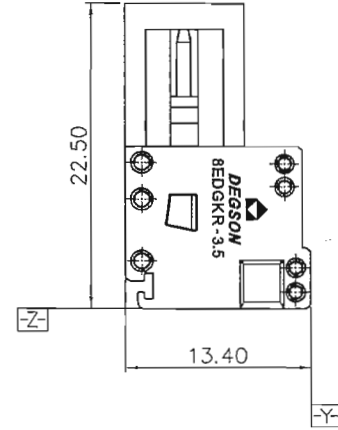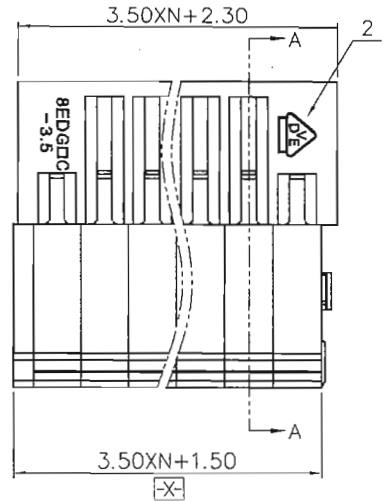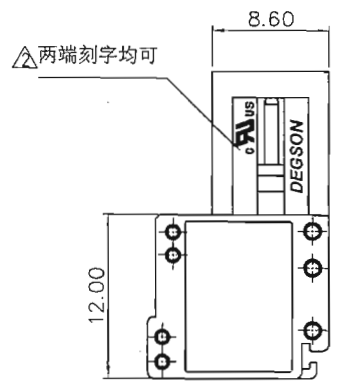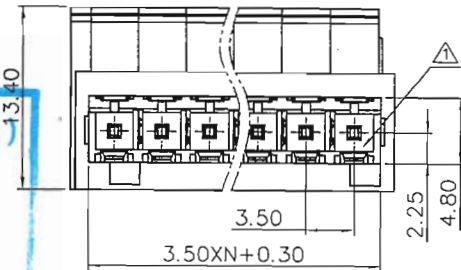

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	8EDG(R)C-3.5 housing	1115A41XXA(H)	1	PA66	UL94V-0
1	8EDGKR-3.5-Cover	1119C4101A(H)	1	PA66	UL94V-0

DETACHED LISTS	← MM (INCH) →	MATERIAL:	宁波高正电子有限公司 DEGSON ® DEGSON ELECTRONICS CO., LTD NAME: 8EDGKR-3.5-XXP-11-01A(H) TITLE: ASSEMBLY DRAWING DRAWING NO.: 8EDGKR-3.5-EC2 DO NOT SCALE DRAWING SCALE N/A SHEET 1/1		
	TOLERANCES EXCEPT AS NOTED	FINISH:			
	.X ± .XX ± .XXX ±	PART NO.:			
	.X' ± .XX' ± .XXX' ±	APPD: Aaron 3/9-15 Jen 3/9/15			
ANGLES ± 1'	THIRD ANGLE PROJECTION	CHKD: Jen 3/9/15	DRFT: HXC 03/16/15	REV	-3

NO.	DESCRIPTION	QTY	UNIT	MATERIAL	REMARKS
5	WS 1.5 Spring	X000001700(H)	XX	Stainless steel	
4	8EDGKR-3.5 Pin Header	1119B00010(H)	XX	Copper Sn plated	
3	8EDGKR-3.5-Housing	1119A4101A(H)	XX	PA66	UL94V-0