

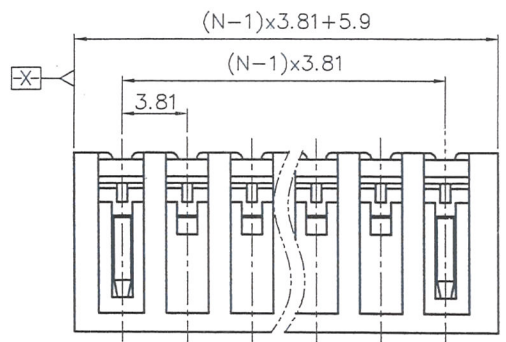
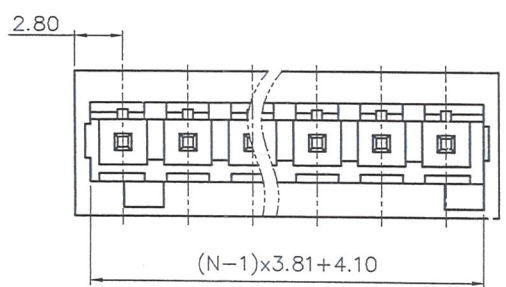


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

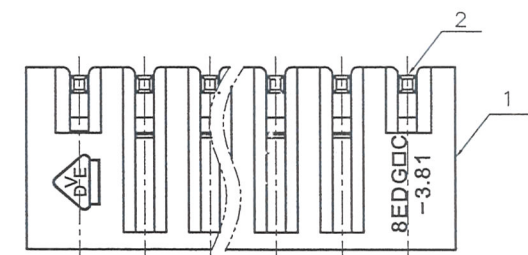

Printing on both side is ok

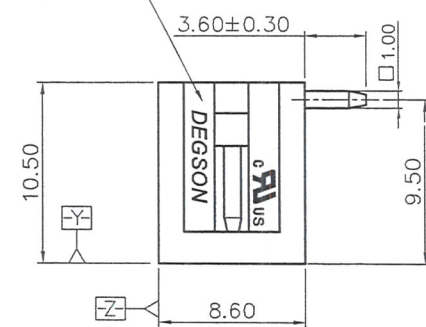

NOTES1:

- UL Standard
 - 1. Rated voltage/current : 300V / 10A
 - 2. Withstanding voltage : AC1600V/1Min.
- IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.5KV
Rate Voltage(V)	130V
Rate Current(A)	10A


8EDGRC - 3.81 - XXP - 11 - 01A (H)
 (RoHS)
 01A-(Customer request)
 (Series No.)(Pitch) (Poles)(Single Pitch) (Color)

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.81mm, Poles : N=2~24P
- 3. Operating temperature: -40°C~+105°C
- 4. Standard color number: PANTONE 7534U
- 5. Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm				-	∩	∇
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10		
To 6	To 10	To 30	To 60	To 100	To 150	<		
±0.15±0.20±0.30		±0.30±0.50±0.70		±1.00±1.30		±2*		

6. RoHS Compliance

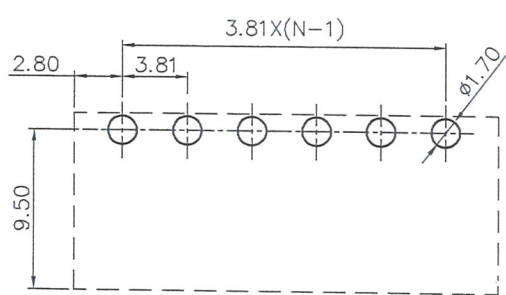


PCB LAYOUT

文登中心
 研发专用
 2017.08.25
 (仅限内部使用, 对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.:	/		
	APPD:	Aozm 2017.8.25		
	CHKD:	CLB 2017.8.24		
	DRFT:	Song 2016/01/08		
NAME:		8EDGRC-3.81-XXP-11-01A(H)		
TITLE:		CUSTOMER DRAWING	REV	TO
DRAWING NO.:		8EDGRC-3.81-C01	SHEET	1/1
MM (INCH)		DO NOT SCALE DRAWING	SCALE	1:1



THIRD ANGLE PROJECTION